

BILL OF MATERIAL (CURRENT LEVEL)				
ITEM	PT/ASSY	DESCRIPTION	TYPE	QTY.
1	10438	BASE - ROPE RING	PART	2
2	7-009	HARDWARE KIT - GRAB BAR	ASSEMBLY	1
3	7-532	16" GRAB BAR ASM	ASSEMBLY	1



**BRASSTECH**  
INCORPORATED

2001 E. CARNEGIE AVE  
SANTA ANA, CA 92705  
(949) 417-5207



GRAB BAR 16" MODERN

ASSY. NO.		15-36		
-	RELEASED	07/31/02		
REV	REV DESC	DATE		
SCALE 0.300		REF. -	SHEET 1 OF 1	COPYRIGHT ©



# SPECIFICATION DWG

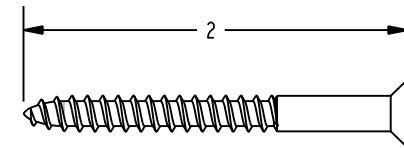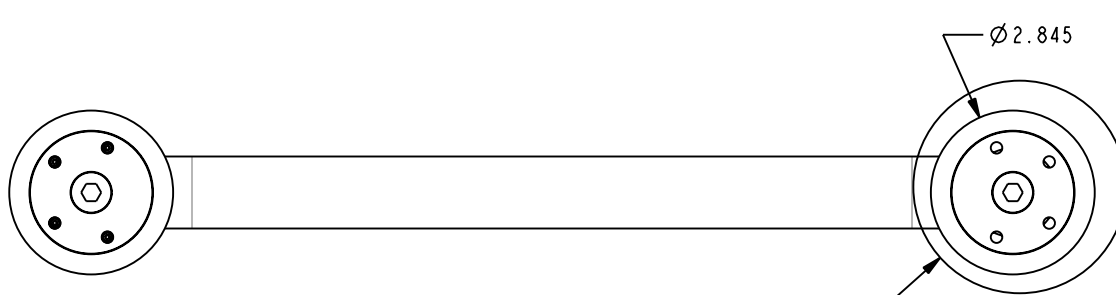

WOOD SCREW - #10 X 2"

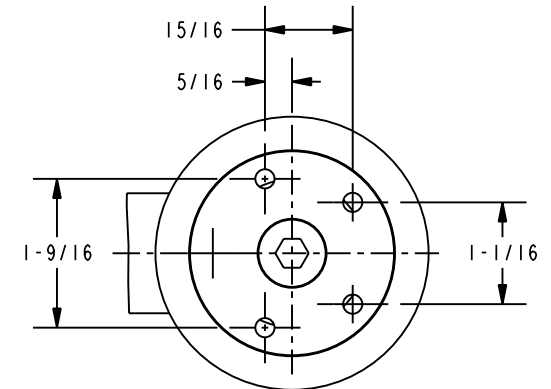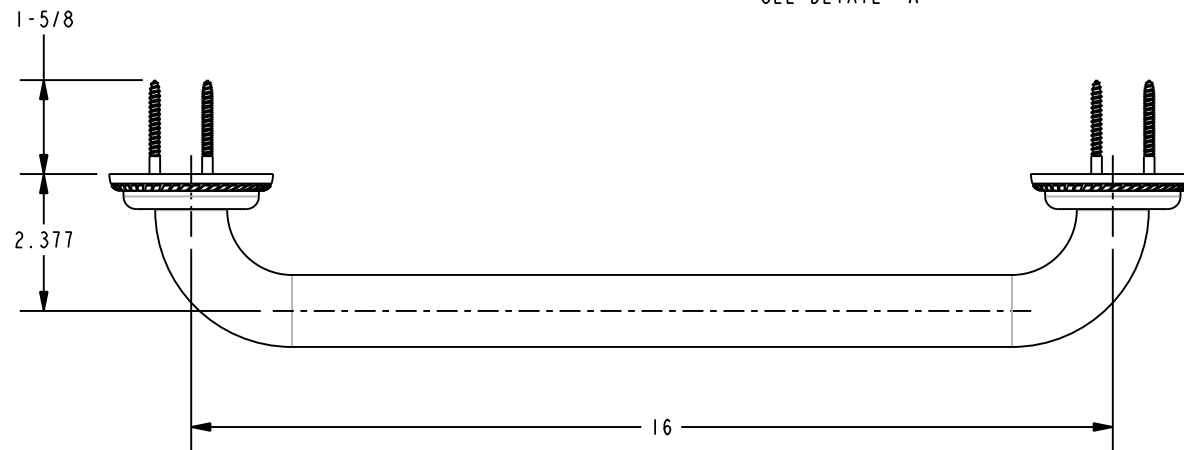

DETAIL A  
SCALE 0.500  
WALL MOUNT

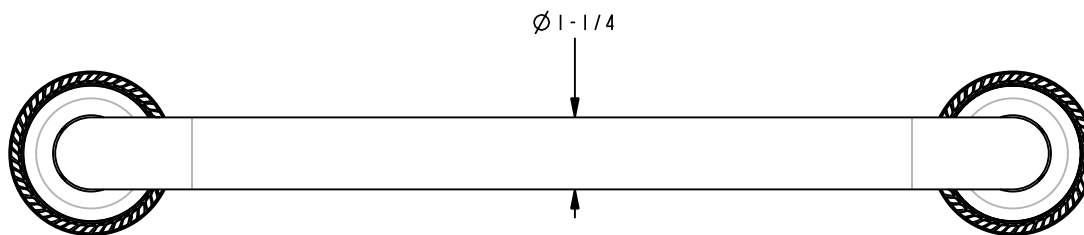

DIMENSIONS ARE IN INCHES AND AN APPROXIMATION OF A TYPICAL INSTALLATION

**BRASSTECH** 2001 E. CARNEGIE AVE.  
INCORPORATED SANTA ANA, CA 92705  
(949) 417-5207

GRAB BAR 16" MODERN

ASSY. NO. 15-36\_SPEC

SCALE 0.300

REF. -

SHEET 1

OF 1

COPYRIGHT ©

-	RELEASED	07/31/02
REV	REV DESC	DATE