

INSTALLATION INSTRUCTIONS FOR P1109-L For LED Ceiling Mount Fixture

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT ! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DODISJONCTEUR.

PREPARATION

1. Shut off power at the fuse box or circuit breaker box. If necessary remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Attach mounting plate (B) to the junction box with junction box screws (D) (Size: 8-32*1/2"L).

CONNECTING THE WIRES

4. Connect the fixture wires to the junction box wires. (See Fig. 2). Connect the white input wire from the driver to the white wire from the junction box. Connect the black input wire from the driver to the black wire from the junction box. Make sure all the wire connectors are secure. Connect the ground wire from the junction box and fixture ground Wire to the mounting plate (B) with the green grounding screw provided. Tuck the wire connections neatly into the junction box.

FINISHING THE INSTALLATION (FIG. 1)

5. Connect the quick connector (E) from the ceiling pan (B), to the quick connector (F) from fixture (L). Align the holes in fixture (L) to the two studs on ceiling pan (B) and secure with finials (H)
6. Place the glass panel (I) into glass holder (K). Thread decorative studs (J) onto glass holder (K). Align glass holder (K) with glass panel (I) to fixture (L) and secure with screws (G).




CAUTION /ATTENTION: When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base or ceiling plate (L) only.

Replacing LED module (Fig. 3)

The LED module can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details (Fig 3.)

Warning: Turn off power at the circuit breaker before replacing LED module or LED driver.

- a. Loosen stud (G) on fixture (L) to remove the glass holder (K) together with the glass panel (I).
- b. Unscrew the finials (H) to remove fixture (L) from mounting plate (B).
- c. Disconnect the wire connector (O).
- d. Loosen screws (M) from ceiling plate (L) and then remove LED module (N) carefully.
- e. Reverse steps a-c for installing the new LED module.
- f. Note: The LED module should be provided by a specified supplier.
- g. For better heat dissipation the LED module (N) should be

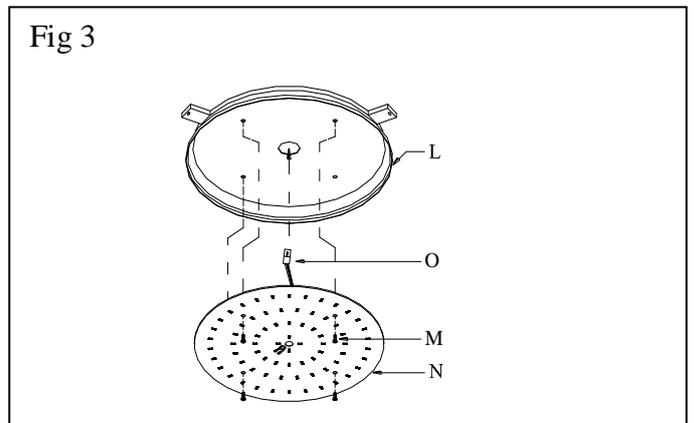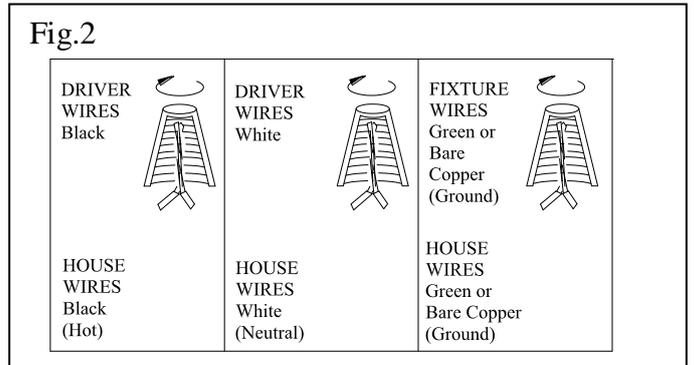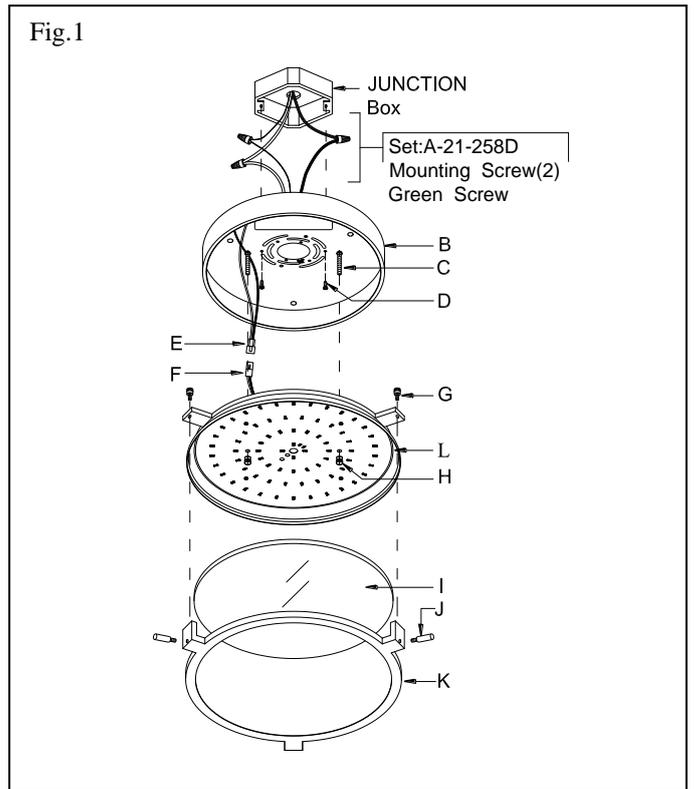

Brand: Lutron

Ordering Information

■ Boxed

● Clamshell

Model number	Product name	Control type	Maximum capacity
■ DVCL-153P-	Divi C-L	Single-pole/3-way dimmer-	150 W CFL/LED or 600 W Incandescent/ Halogen 120 V
● DVCL-153PH-			
■ DVSCCL-153P-	Divi C-L Satin Colors		
■ CTCL-153P-	Skylark Contour C-L		
● CTCL-153PH-			
■ AYCL-153P-	Ariadni C-L	Single-pole lamp dimmer	100W CFL/LED or 250W Incandescent/ Halogen 120v
● AYCL153PH-			
● TTCL-100H-	Credenza C-L		

IMPORTANT: Fixture should be installed by a qualified electrician to ensure proper wiring and installation. Dimmable with C-L (CFL & LED) type and Incandescent/Halogen type dimmers

