



FUJIOH

Inline Fan



STANDARD FEATURES

- Galvanized steel housing with baked powder coat finish
- Powered by external rotor motorized mixed flow impeller
- Permanently lubricated sealed ball bearings
- 100% speed controllable
- Automatic reset thermal overload protection
- Prewired electrical box
- Three-year limited warranty

Specifications				
Model	CFM (0 / 0.1 / 0.2"wg)	Watts	Volts	Amps
5064	836 / 799 / 761	327	115	2.99*1
5065	910 / 873 / 836	329	115	3.01*1
5066	1266 / 1226 / 1187	529	115	4.84*2


*1. Recommended speed control rating 5A.

*2. Recommended speed control rating 7.5/ 10A.

Note:

5064, 5065 & 5066 includes two clamps.

5064-1, 5065-1 & 5066-1 excludes clamps.

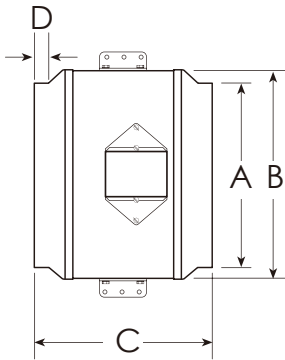

Model	A	B	C	D	Metal Gauge	Wt. (lbs)
5064	7 7/8	12 1/2	15 1/2	3/4	18	20
5065	9 7/8	12 1/2	12 1/2	3/4	18	19
5066	9 7/8	14	15	3/4	18	25

All dimensions in inches

Accessories for 5064	Model
<input type="checkbox"/> φ8" Silencer	5073
<input type="checkbox"/> φ8" Mounting Clamp	5075
<input type="checkbox"/> φ8" Roof Cap	5077
<input type="checkbox"/> Reducers (φ 10" to φ8")	5079
<input type="checkbox"/>	

Note:
Two Mounting Clamps helps fan installation to hold duct.
We highly recommend silencer use.

Accessories for 5065,5066	Model
<input type="checkbox"/> φ10" Silencer	5074
<input type="checkbox"/> φ10" Mounting Clamp	5076
<input type="checkbox"/> φ10" Roof Cap	5078

Wall Switch	Model
<input type="checkbox"/> Wall Switch on/off 10Amp	5081
<input type="checkbox"/> Wall Switch on/off 5Amp	5082
<input type="checkbox"/> Wall Switch slider 5Amp	5083
<input type="checkbox"/> Wall Switch slider 7.5Amp	5084



FUJIOH

Fuji Industrial USA, Inc.

16300 Christensen Rd, #212 Seattle, WA 98188

1-888-547-9880

www.fujioh.com