



SPECIFICATIONS

ESF130SH

EXHAUST FAN



130 CFM / <0.3 Sones @ 0.10" SP., 32.5 Watts
91 CFM @ 0.25 SP. / 112 CFM @ 0.25 SP. (Boost)

• **Grill**

White, polymeric grill secured in place with torsion springs; easily removed if necessary, dimensions - 17" x 15 7/8".

• **Blower Wheel**

Balanced polymeric dual inlet blower wheel secured in place using a hex nut.

• **Motor**

Enclosed 4 pole high efficiency, permanently split capacitor motor (PSC); life time lubrication, suitable for continuous operation. Rated 115/120 volts, 60 Hz.

• **Fan Housing**

23 gauge galvanized steel housing. Fan housing dimensions: 12 7/8" x 12 3/4" x 9 7/8".

• **Humidity Sensor**

Integrated humidity sensor automatically turns fan on until the desired humidity level is reached.

• **Duct Collar**


6" round, zinc plated metal collar adapter. 6" spring loaded and gasketed aluminum backdraft damper.

• **Electrical Connections**

0.5" electrical knockouts provided. Easy wiring access via either internal or external wiring compartment cover.

• **Lighting**

Electronic Quick Start Ballast – rated 26 Watt. Includes 26 watt, Quad 4 pin PL lamp. 4 watt night light (night light bulb not included).

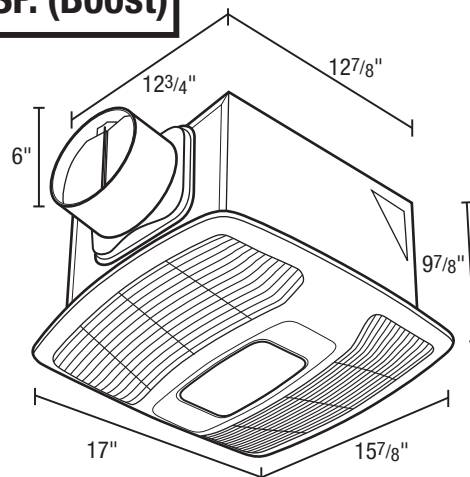

Acceptable for use over tub or shower when installed in a GFCI protected branch circuit.



• **Unit Mounting**

The housing will mount through drywall thickness up to 3/4", with a rough-in opening of 13 1/8" x 13". The housing will mount either between 16" or 24" on center joists, using the 2 supplied housing mounting brackets. The housing mounting brackets can be adapted for overhead mounting (hardware not provided). The unit is provided with an optionally installed ceiling flange to ensure proper building infiltration rates are maintained and that no air leaks occur between the fan housing and ceiling cutout.

EXPANDED PERFORMANCE

	Static Pressure (inches of w.g.)							Sones @ .1 SP	Fan Speed RPM	Power Watts	Full Load Amps
	0	0.1	0.15	0.2	0.25*	0.3	0.35				
Air Flow - CFM	149	130	119	107	91/112	79	62	<0.3	783	32.5	0.50

* Boost speed provides 112 CFM, 0.6 sones, 0.50 amps @ .25 Static Pressure

PROJECT							ARCHITECT				
LOCATION							ENGINEER				
CONTRACTOR							SUBMITTED BY			DATE	
FAN NUMBER	MODEL NUMBER	CFM	IN W.G.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS		



U.S.: 820 Lincoln Avenue
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048

Canada: 8 Edvac Drive
 Brampton, Ontario L6S 5P2
 Tel: (905) 456-2033 • 800-250-8767
 Fax: (905) 456-1015