


1 x 250 Watt Heat Lamp
 120 Volts, 2.0 amps, 60 hz.

- **GRILL**
 White, polymeric grill (flame retardant ABS UL rated 94-5v) secured in place with torsion springs; easily removed if necessary, dimensions - 10"x10".
- **HEATER HOUSING**
 23 gauge painted steel housing, dimensions 8 1/4"x8"x5 7/8".
- **LAMPING INFORMATION**
 1 x 250 watt maximum, type R40 bulb, medium base, 850 BTU heating.
- **UNIT MOUNTING**
 Rated Type IC for ceilings insulated to R-40. Designed to mount in ceilings with at least 6" of clearance. The unit is centered between joists (with 16" centers) using hanging brackets. The housing will mount through drywall thickness up to 3/4", with a rough-in opening of 8 3/8"x8 1/16".
- **SINGLE PACK SHIPPING INFO**
 - Box Dim 14 1/2"x11"x8"
 - UPC 0-8316227021-4
 - Shipping Weight - 5 lbs.

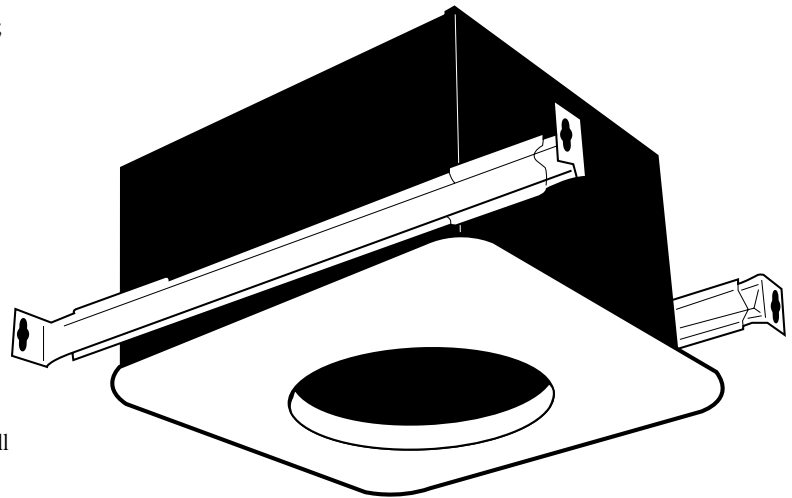

TYPE IC RATED

PROJECT							ARCHITECT			
LOCATION							ENGINEER			
CONTRACTOR							SUBMITTED BY			DATE
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS	



THIS PRODUCT IS TESTED & CERTIFIED BY UNDERWRITERS LABORATORIES Inc. TO UL STANDARD UL-2021 FIXED AND LOCATION-DEDICATED ELECTRIC ROOM HEATERS, UL FILE E205985 AND BY INTERTEK TESTING SERVICES TO CSA STANDARD C22.2 No. 46-M1988 ELECTRIC AIR HEATERS, ETL FILE 273-2651-00.

U.S.: 820 Lincoln Avenue
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 1-877-304-3785
 Fax: (610) 696-4648

Canada: 110 Glidden Road
 Brampton, Ontario L6T 2J3
 Tel: (905) 456-2033
 Fax: (905) 456-1015