

# ASSEMBLY INSTRUCTIONS

## ITEM DESCRIPTION


MATERIAL TYPE: STEEL, MARBLE FINISH : ANTIQUE BRASS + ALABASTER TC  
 SOCKET TYPE: LED 3000K, CRI 90 SOCKET QTY: 1PC  
 BULB TYPE: LED BULB WATTAGE: LED 11W (163LM)  
 ITEM NET WEIGHT:  
 UL COMPLIANT  
 INSTALLATION ENVIRONMENT: SUITABLE FOR DAMP LOCATIONS

### NOTE:

\*YOUR PRODUCT(S) MAY BE PACKED IN MORE THAN ONE CARTON  
 \*THIS ITEM MAY REQUIRE PERIODIC TIGHTENING


## PARTS

<b>A</b>	MOUNTING PLATE	1 PC
<b>B</b>	CANOPY SCREWS	2PCS
<b>C</b>	CANOPY	1 PC
<b>D1,2,3,4</b>	RODS	4PCS
<b>E</b>	HEX SCREW	8PCS
<b>H</b>	LAMP BODY	1 PC
<b>I</b>	LED MODULE	1 PC
<b>M</b>	HEXNUT	4PCS
<b>N</b>	METAL PLATE	1 PC
<b>O</b>	METAL ARM	4PCS
<b>P</b>	THUMB SCREWS A	4PCS
<b>Q</b>	SMALL ALABASTER	1 PC
<b>R</b>	LARGE ALABASTER	1 PC
<b>S</b>	THUMB SCREWS B	4PC
<b>T</b>	2-WIRE TERMINAL	1 PC




**PLEASE IGN  
 IN THE CANC**

### INCLUDED ASSEMBLY HARDWARE

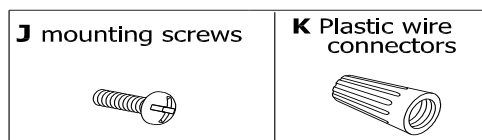

### TOOLS NEEDED(INCLUDED)



## ASSEMBLY INSTRUCTIONS

- REMOVE ALL PACKING CONTENTS AND PARTS FROM THE CARTON(S) CAREFULLY.
- PLEASE BE SURE YOU HAVE ALL PARTS INDICATED BEFORE YOU BEGIN ASSEMBLY
- SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER
- PUT THE LARGE ALABASTER(R) INTO ONE OF THE METAL ARM(O) THEN SECURE METAL ARM(O) WITH THUMB SCREWS B(S) AND TIGHTEN THUMB SCREWS B(S) IN A CLOCKWISE DIRECTION ON THE SECOND METAL ARM(O). THEN PUT THE SMALL ALABASTER(Q) ON TOP OF THE LARGE ALABASTER(R) AND SECURE IT WITH THUMB SCREW B(S).
- SCREW THE LAMP BODY (H) TO THE LED MODULE (I) TILL TIGHT, THEN INSERT THE LED MODULE (I) INTO THE LAMP BODY (H) THEN FIX ONE OF THE METAL ARM(O) ON THE METAL PLATE(N) WITH HEXNUT(M) AND HEX SCREW (E) IN OPERATION ON THE OTHER TWO PIECES OF METAL ARM(O). MAKE SURE THE THUMB SCREWS A(P) ARE TIGHT ENOUGH.
- CONNECT LAMP BODY(H) AND CANOPY(C) WITH ROD (D1,D2,D3,D4), WHEN YOU CONNECT THE RODS WITH HEX SCREW (E) FIRST THEN TIGHTEN WITH ALLEN WRENCH (U) AFTER ALL RODS ARE CONNECTED. **BE SURE ALL THE SET SCREWS ARE TIGHT ENOUGH.**
- NOTE: IF YOU WANT THE FIXTURE TO BE SEMI-FLUSH MOUNT, YOU HAVE TO DISCONNECT THE 2-WIRE TERMINAL(T), AND CONNECT LAMP BODY(H) AND CANOPY(C) WITH ROPE WIRE BY 2-WIRE TERMINAL(T).**
- PULL THE ELECTRICAL CORD OF "J BOX" THROUGH THE EXIT HOLE OF THE MOUNTING PLATE(A).
- PLEASE PAY SPECIAL ATTENTION THAT YOU DO NOT NEED TO CONNECT THE 2-WIRE TERMINAL(T) IT IS USED FOR THE WIRE CONNECTION FOR EURO-MARKET.**
- CAREFULLY INSPECT THE FIXTURE WIRES. THE NEUTRAL FIXTURE WIRE HAS VERY THIN INSULATION. THE HOT FIXTURE WIRE HAS A SMOOTH COVERING. THE BARE SILVER WIRE IS THE GROUND WIRE.
- ATTACH THE GROUND WIRE FROM THE FIXTURE TO THE GROUND JUNCTION BOX WIRE. FASTEN EACH TOGETHER WITH A PLASTIC WIRE CONNECTOR (K) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. IF THE JUNCTION BOX DOES NOT HAVE A GROUND WIRE, INSERT THE GREEN GROUND SCREW INTO THE GROUND SCREW OF THE FIXTURE'S BARE GROUND WIRE AROUND THE GROUND SCREW. **IT IS IMPERATIVE TO USE THE GREEN GROUND SCREW.**
- CONNECT THE NEUTRAL FIXTURE WIRE TO THE NEUTRAL JUNCTION BOX WIRE (USUALLY WHITE) WITH A WIRE CONNECTOR (K) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE.
- CONNECT THE HOT FIXTURE WIRE TO THE HOT JUNCTION BOX WIRE (USUALLY BLACK) WITH A PLASTIC WIRE CONNECTOR (K) AND WRAP THE CONNECTION WITH ELECTRICAL TAPE. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.**
- GENTLY TUCK THE WIRE CONNECTIONS(K) NEATLY INTO THE CEILING JUNCTION BOX.
- ATTACH THE MOUNTING PLATE (A) TO THE OUTLET BOX USING THE MOUNTING SCREWS (B).
- ATTACH THE CANOPY(C) TO THE MOUNTING PLATE(A) USING THE ENCLOSED CANOPY SCREWS (B) IN A CLOCKWISE DIRECTION.
- RESTORE POWER TO THE JUNCTION BOX AND TEST FIXTURE.

WIPER OFF THE SURFACE WITH A DRY CLOTH.

FOR CUSTOMER SERVICE QUESTIONS CALL 1.888.488.8866  
 ARTERIOS HOME: 972.488.9800  
 ARTERIOS CONTRACT: 972.488.9800 EXT.321

**DISCLAIMER**  
 WE RECOMMEND

ARTERIC


**ITEM # 49793 | Nova Pendant - White Alabaster, Antique Brass**

JP COAT/SEALANT:


VOLTAGE:100V-130V



**PRODUCT ASSEMBLY**



**IGNORE THIS DEVICE COPY**

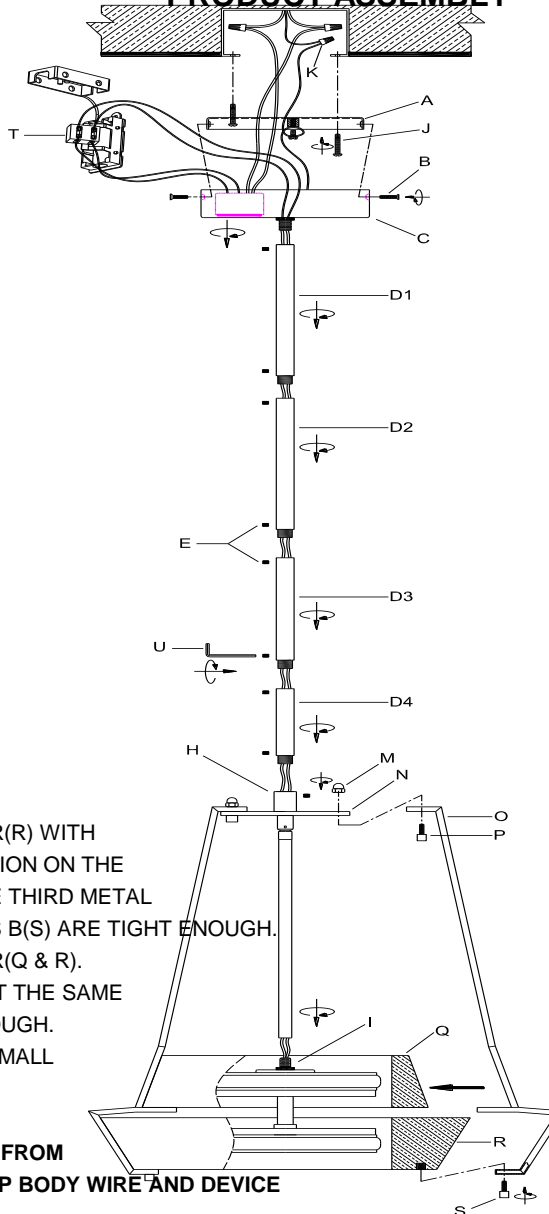

AKER.

ETAL ARM(O) ON THE ALABASTER(R) WITH  
ON . REPEAT THE SAME OPERATION ON THE  
IDGE ALABASTER(R), ATTACH THE THIRD METAL  
IAKE SURE THE THUMB SCREWS B(S) ARE TIGHT ENOUGH.  
LED MODULE(I) INTO ALABASTER(Q & R).  
ID THUMB SCREWS A(P), REPEAT THE SAME  
IB SCREWS A(P) ARE TIGHT ENOUGH.  
NNECT THE RODS, LOOSE THE SMALL  
RE CONNECTED.

**CONNECT THE LAMP BODY WIRES FROM  
(D4). THEN CONNECT THE LAMP BODY WIRE AND DEVICE**

VG PLATE.

**THE TERMINAL BLOCK(F).**

FINE RIDEGS MOLDED INTO ITS PLASTIC COVERING.

3ROUNDED WIRE.

WIRE FROM THE OUTLET (USUALLY GREEN OR BARE WIRE).

ONNECTION WITH ELECTRICAL TAPE. IF YOUR OUTLET BOX

MOUNTING PLATE (A) FACING DOWN, AND WRAP THE

**HAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.**

USUALLY WHITE). FASTEN EACH TOGETHER

E. BE SURE NO STRANDS ARE EXPOSED.

ACK). FASTEN EACH TOGETHER

ICAL TAPE. BE SURE NO WIRE STRANDS

**TY WILL BE COMPROMISED.**

3OX.

REWS(J) AND TIGHTEN SCREWS(J) WITH A SCREWDEVICE.

OPY SCREWS(B).SECURE THE CANOPY BY TIGHTENING 2 CANOPY SCREWS(B) IN A

**ORS**

THE INSTALLATION OF THIS ELECTRICAL LIGHT FIXTURE TO BE DONE BY A LICENSED ELECTRICIAN.

**ORS**