



Family: Cascade | Item No. 1835 BZ/SK/TT



▼ start here

Drawing 1 - Fixture Mounting

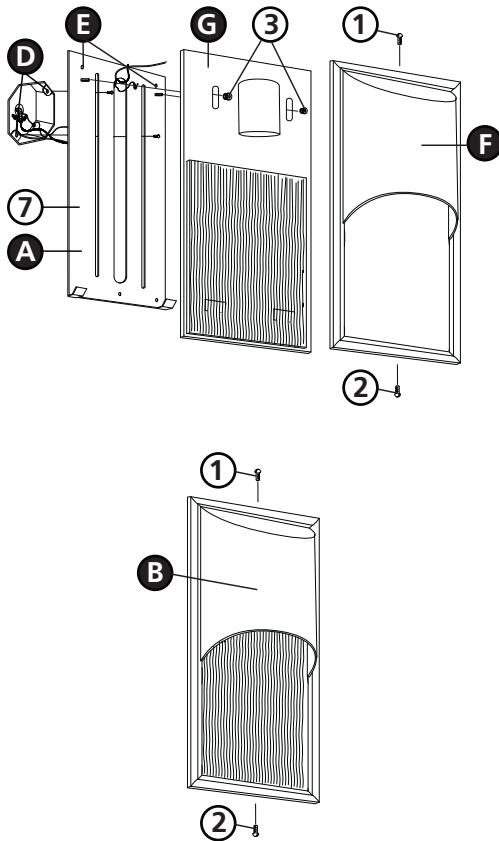

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

***** The construction of this fixture will be accomplished by first attaching the mounting strap to the junction box, making all necessary electrical connections, mounting the fixture to the wall and then lamping the fixture.**

2

1. Remove mounting bracket (A) from back of fixture (B) by unthreading top screw (1) and bottom screw (2) from the outer housing (F). Unthread the two ball knobs (3) from the top of the internal assembly (G)- see **Drawing 1**.
2. Pull the top of the mounting bracket (A) away from the fixture, then slide it down to remove.
3. Determine the desired height of fixture (B) and mounting bracket (A).
4. Attach mounting bracket (A) to junction box (J) by threading 2 screws (C) provided into holes (D) of junction box (J) .
5. Secure mounting bracket using hole(s) (E) with self provided screws.

SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.

Note: This fixture requires two grounds to be connected. One on mounting bracket(A) and another on the back of fixture(B).

3

- Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet (I.S. 18) and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

4

1. To mount fixture, line up rectangular cut outs (4) on back of internal assembly (G) with hooks (5) on the bottom of mounting bracket (A). Holding the internal assembly at a slight angle slide cut outs (4) over both hooks (5), then slide slots (6) from the top back of internal assembly (G) over screws (7) on mounting bracket (A) - see **Drawing 1**.
2. Thread the two ball knobs (3) provided onto screws (7).
3. Replace outer housing (F) by sliding it over internal assembly (G) and re-inserting top screw (1) and bottom screw (2).
4. Fixture can now be lamped accordingly.

Note: Maximum wattage for 1835 fixture is 100 watts per bulb.

6.2.09