Job	Name/	Location:
-----	-------	-----------

DO	No	•

10110..

	Arc	hite	ct:
--	-----	------	-----

Engr:

Rep:

(Company)

Performance:

Cooling Nominal Test Conditions:

Power Supply $(V/Hz/Ø)^{1,2}$

Installed Liquid Pipe (in., O.D.)

Installed Vapor Pipe (in., O.D.)

Liquid Connection (in., O.D.)

Vapor Connection (in., O.D.)

• Inverter (variable speed fan)

• Long-life washable prefilter

Drain (in., O.D. / I.D.)

Temperature Sensor

Controls Features:

• Hot start

• Self diagnosis

• Auto operation

• Soft dry operation

Indoor: 80°F DB / 67°F WB Outdoor: 95°F DB / 75°F WB

Rated Amps (A)

Electrical:

Piping:

Nominal Cooling Capacity (Btu/h) Nominal Heating Capacity (Btu/h) (Project Manager)

GC:

Mech:

For:

File

9,000

10,400

208-230/60/1

0.4

ø1/4

ø3/8

ø1/4

ø3/8

1 - 1/4 / 1

Thermistor

Approval

KNMKB091A Multi F R32 Low Static Ducted Indoor Unit 9,000 Btu/h



Resubmit

Other_

Entering Mixed Air:

Cooling (°F WB)	57 ~ 77
Heating (°F DB)	59 ~ 81

Unit Data:

Refrigerant Type	R32
Refrigerant Control	EEV
Sound Pressure (H/M/L) dB(A) ³	30 / 26 / 23
Primary Filter	Washable Pre-filter
Net Weight (lbs.)	35.1
Shipping Weight (lbs.)	43.4

Fan:

Туре	Sirocco
Quantity	1
Motor/Drive	Brushless Digitally Controlled/Direct
Air Flow H/M/L (CFM)	318 / 247 / 194
External Static Pressure ^{4,5} (in wg)	0.10
Minimum External Static Pressure	0.00
Maximum External Static Pressure	0.20
Dehumidification (pts./hr.)	1.37

Notes:

1. Acceptable operating voltage: 187V-253V.

2. The power wiring and the communication wiring from the outdoor unit to the indoor unit, or from the branch distribution unit to the indoor unit is field supplied and must be stranded, shielded or unshielded (if shielded, it must be grounded to the chassis of the outdoor unit only). All wiring must comply with applicable local and national codes.

a. Power wiring and communication wiring from outdoor unit to indoor unit (No. x AWG) 3 x 14 / 2 x 18.

- b. Power wiring and communication wiring from branch distribution unit to indoor unit (No. x AWG) 3 x 14 / 2 x 18.
- 3. Sound Pressure levels are tested in an anechoic chamber under ISO Standard 3745.
- 4. Adjust fan speed to correct for static pressure increases when using field-supplied air filter.
- 5. At factory fan speed setting.
- See Engineering Manual for sensible and latent capacities.
 The indoor unit comes with a dry helium charge.
- 8. Corresponding refrigerant piping length is in accordance with standard length of each outdoor unit and the level difference is 0 ft. All capacities are net with a combination ratio between 95 105%.
- Must follow installation instructions in the applicable LG installation manual.

SB_MultiF_LowStaticDucted_R32_KNMKB091A_2025_01_17_142925

ERTIFIED

Page 1 of 2

Auto restartSleep modeTimer (on/off/weekly)

Heating Nominal Test Conditions:

Indoor: 70°F DB / 60°F WB

Outdoor: 47°F DB / 43°F WB

- Drain pump
- ESP control
- R32 leak detection sensor

Optional Accessories:

□ Single-Port Shutoff Valve - PRHPZ010A □ Auxiliary Heater Kit - PRARH1

Controller Options:

- □ MultiSITE[™] CRC* Controllers
- □ Simple Remote Controllers
- □ Standard III Remote Controllers
- Deluxe Remote Controller
- □ Remote Temperature Button Sensor
- Dry Contacts
- 🗆 Wi-Fi Module PWFMDD200



Tag #:

Job Name/Location:

KNMKB091A Multi F R32 Low Static Ducted Indoor Unit 9,000 Btu/h




Tag No.:

PO No.: _

				(unit: inch)
Model Number	۷	8	υ	٥
KNMKB091A	30-15/32	27-9/16	27-9/16 28-27/32 25-31/32	25-31/32
KNMKB121A KNMKB181A	38-11/32		35-7/16 36-23/32 33-27/32	33-27/32

Number	Name	Descripition
	Liquid pipe connection	
	Gas pipe connection	
	Drain pipe connection	
	Power supply connection	
	Air discharge	
	Air suction	

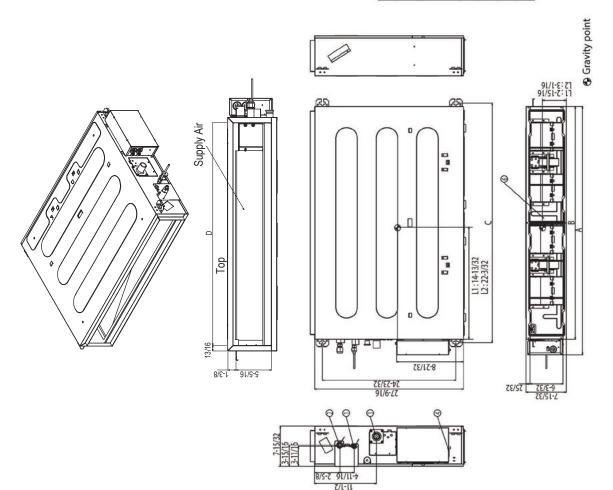

G Date: