


INSTALLATION INSTRUCTIONS


OUTLET BOX INSTALLATION

1

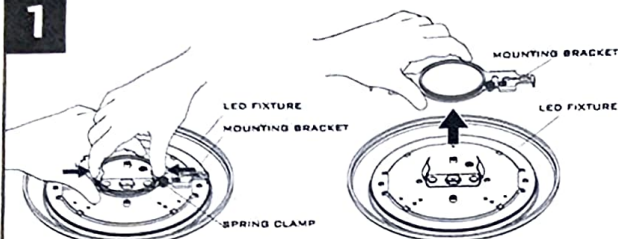


REMOVE MOUNTING BRACKET FROM LED FIXTURE BY COMPRESSING THE SPRING CLAMP. SAVE MOUNTING BRACKET FOR NEXT STEP.

2

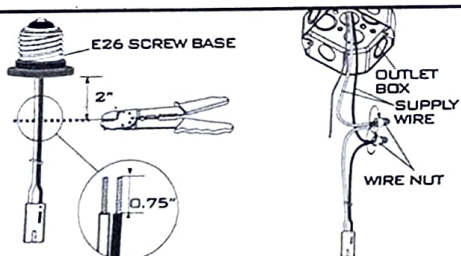


MEASURE 2" FROM E26 SCREW BASE, CUT WIRES, THEN STRIP OFF 0.75" OF INSULATION. SECURE HOUSING QUICK CONNECT WIRES TO SUPPLY WIRES WITH WIRE NUTS, BLACK TO BLACK, WHITE TO WHITE.

3



SECURE MOUNTING BRACKET TO OUTLET BOX WITH OUTLET BOX SCREWS.


4

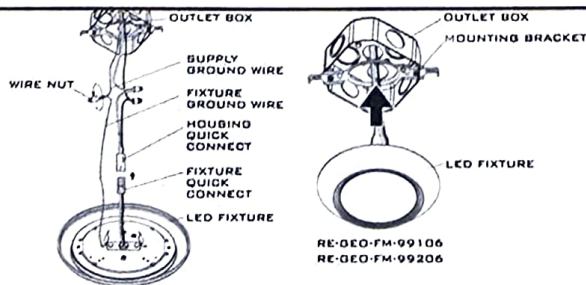

CONNECT FIXTURE QUICK CONNECT TO STRIPPED HOUSING QUICK CONNECT. SECURE GROUND FIXTURE WIRE TO SUPPLY GROUND WIRE WITH WIRE NUT. BRING LED FIXTURE UP TO OUTLET BOX AND SNAP ONTO MOUNTING BRACKET.


RETROFIT INCANDESCENT HOUSING INSTALLATION

1




INSTALL HOUSING MOUNTING CLIPS ONTO MOUNTING BRACKET.

2

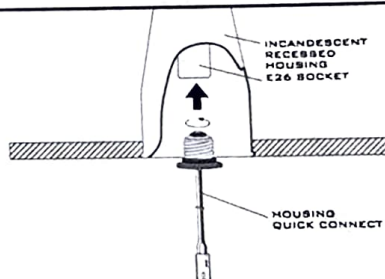


SCREW IN HOUSING QUICK CONNECT INTO INCANDESCENT HOUSING'S E26 SOCKET.

3



4

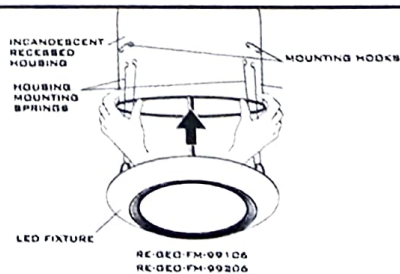

BRING LED FIXTURE UP TO INCANDESCENT RECESSED HOUSING, COMPRESS HOUSING MOUNTING SPRINGS AND INSERT THEM INTO INCANDESCENT RECESSED HOUSING'S MOUNTING HOOKS, PUSH LED FIXTURE UP

INSTALLATION INSTRUCTIONS


PLEASE READ AND SAVE THESE INSTRUCTIONS. READ CAREFULLY BEFORE USING PRODUCT. PROTECT YOURSELF AND OTHERS BY OBSERVING ALL SAFETY INFORMATION, WARNINGS AND CAUTIONS. FAILURE TO COMPLY WITH INSTRUCTIONS COULD RESULT IN PERSONAL INJURY AND/OR DAMAGE TO PRODUCT OR PROPERTY. PLEASE RETAIN INSTRUCTION SHEET FOR FUTURE REFERENCE.




IMPORTANT SAFETY INSTRUCTIONS



1. READ COMPLETELY BEFORE BEGINNING. IF YOU DO NOT HAVE ADEQUATE ELECTRICAL WIRING EXPERIENCE, HAVE THIS INSTALLED BY A QUALIFIED LICENSED ELECTRICIAN.
2. ALL ELECTRICAL CONNECTIONS MUST BE IN ACCORDANCE WITH LOCAL CODES, ORDINANCES AND THE NATIONAL ELECTRIC CODE.
3. THIS PRODUCT OPERATES ON 120 VAC; ALWAYS CONFIRM THE MAXIMUM WATTAGE OF THE PRODUCT DOES NOT EXCEED THE MAXIMUM WATTAGE OF THE CIRCUIT IT IS CONNECTED TO.
4. INSPECT THE WIRE INSULATION FOR ANY CUTS, ABRASIONS OR EXPOSED COPPER THAT MAY HAVE RESULTED DURING SHIPPING. DO NOT INSTALL THE PRODUCT IF ANY DAMAGE IS SEEN ON THE PRODUCT OR POWER CABLES.
5. IF YOU ARE UNFAMILIAR WITH METHODS OF INSTALLING ELECTRICAL WIRING, SECURE THE SERVICES OF A QUALIFIED LICENSED ELECTRICIAN.
6. SUITABLE FOR DRY AND DAMP LOCATIONS.
7. FOR INDOOR USE ONLY.

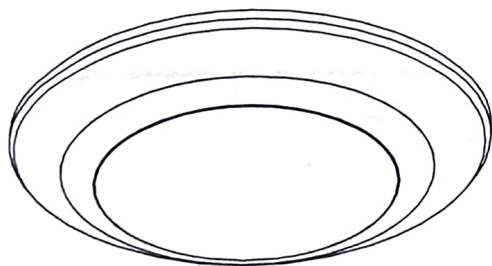

RE-GEO-FM-99106

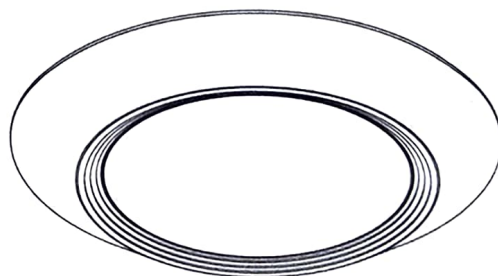

RE-GEO-FM-99206




TURN OFF ELECTRICITY
AT MAIN FUSE BOX (OR CIRCUIT BREAKER
BOX) BEFORE BEGINNING INSTALLATION
BY SWITCHING CIRCUIT BREAKER OFF OR
REMOVING FUSE.
MIN 90° C SUPPLY CONDUCTORS.




**CONSULT A QUALIFIED
ELECTRICIAN TO ENSURE
CORRECT BRANCH CIRCUIT**

OPERATING TEMPERATURE: INPUT VOLTAGE:
-4F° TO 113F° 120V AC

TOOLS REQUIRED



PHILLIPS SCREWDRIVER



WIRE STRIPPER

HARDWARE INCLUDED



WIRE NUTS




OUTLET BOX
SCREWS



HOUSING QUICK
CONNECT



OUTLET BOX MOUNTING
BRACKET (PRE-INSTALLED)



HOUSING MOUNTING
CLIPS