Job Name/Location: Tag No:

GC:

(Project Manager)

For: File Resubmit Date: **Approval** Other PO No.:

Mech: Engr:

Rep:

# KUMXA181A

Architect:

R32 Multi F with LGRED° Outdoor Unit Outdoor Unit (ODU) - KUMXA181A





Cooling Nominal Test Conditions: Indoor: 80°F DB / 67°F WB Outdoor: 95°F DB / 75°F WB Heating Nominal Test Conditions: Indoor: 70°F DB / 60°F WB Outdoor: 47°F DB / 43°F WB

### **Electrical:**

| Power Supply (V/Hz/Ø) <sup>1,2</sup> | 208-230\                       | /, 60, 1 |
|--------------------------------------|--------------------------------|----------|
| MOP (A)                              |                                | 30       |
| MCA (A)                              |                                | 22.7     |
| Cooling Rated Amps (A)               |                                | 17.65    |
| Heating Rated Amps (A)               |                                | 17.65    |
| Compressor (A)                       |                                | 17.0     |
| Fan Motor (A)                        |                                | 0.65     |
| Locked Rotor Amps (A)                |                                | 23       |
| MOP - Maximum Overcurrent Protection | MCA - Minimum Circuit Ampacity |          |

#### Piping:

| Refrigerant Charge (lbs.)                   | 4.85       |
|---|------------|
| Liquid Line Connection (in., O.D.)          | 1/4 x 2    |
| Vapor Line Connection (in., O.D.)           | 3/8 x 2    |
| Maximum Total Piping <sup>3</sup> (ft.)     | 164        |
| Min. / Max. ODU to IDU Piping (ft.)         | 9.8 / 82.0 |
| Piping Length (no add'l refrigerant, ft.)   | 82.0       |
| Additional Refrigerant Charge (oz. / ft.)   | 0.22       |
| Maximum Elevation between ODU and IDU (ft.) | 49.2       |
| Maximum Elevation between IDU and IDU (ft.) | 24.6       |

# ODU = Outdoor Unit **Features:**

- Auto operation / Auto restart
- Inverter (variable speed compressor)
- · Integrated central control connection
- · Defrost / Deicing

#### **Optional Accessories:**

□ Power Distribution Indicator (PDI) Premium - PQNUD1S41 ☐ Mobile LGMV for Android® Smartphones / Tablets or for iOS® Tablets - PLGMVW100 (Android is a registered trademark of Google LLC. iOS is a registered trademark of Cisco Systems, Inc.)

## **Controller Options:**

- ☐ MultiSITE Communication Mgr. □ AC Smart 5
- □ ACP 5

- Restart delay (three [3] minutes)
- Self diagnosis

IDU = Indoor Unit

- Soft start
- Factory-installed drain pan heater
- · Low ambient cooling down to 14°F (-4°F with Wind Baffle Kit)

□ LG Monitoring View (LGMV) for Computers - PRCTILO □ Low Ambient Wind Baffle Kit -ZLABGP04A

# □ ACP 5 BACnet® Gateway

□ LonWorks® Gateway

BACnet® is a registered trademark of ASHRAE. Lon-Works is a registered trademark of Echelon Corp.





# **Operating Range:**

| Cooling (°F DB) | 14 to 118  |
|-----------------|------------|
| Heating (°F WB) | -13 to +64 |

## Unit Data

| Ullit Data.  |               |
|--|---------------|
| Refrigerant Type   | R32           |
| Refrigerant Control  | EEV           |
| Sound Pressure (Cool / Heat) ±1 dB(A) <sup>4</sup>           | 50 / 54       |
| Net / Shipping Weight (lbs.)                                 | 147.7 / 165.3 |
| Power Wiring from ODU to IDU (No x AWG) <sup>2</sup>         | 3 x 14        |
| Communication Wiring from ODU to IDU (No x AWG) <sup>2</sup> | 2 x 18        |
| Heat Exchanger Coating                                       | Gold Fin™     |
| Minimum No. of Indoor Units                                  | 2             |
| Maximum No. of Indoor Units                                  | 2             |

# Compressor:

| Туре       | Scroll |
|------------|--------|
| Quantity   | 1      |
| Oil / Type | PVE    |

## Fan:

| raii.                   |                                       |
|-------------------------|---------------------------------------|
| Туре                    | Axial                                 |
| Quantity                | 1                                     |
| Motor / Drive           | Brushless Digitally Controlled/Direct |
| Max. Airflow Rate (CFM) | 2 119                                 |

- Acceptable operating voltage: 187V 253V.
   All power supply wiring to the outdoor unit is field supplied, solid or stranded. The power wiring and the communication wiring from the outdoor unit to the indoor unit is field supplied and must be stranded, shielded or unshielded (if shielded, it must be grounded to the chassis of the outdoor unit only). All wiring
- must comply with applicable local and national codes. a. Power Supply Wiring to Outdoor Unit (No. x AWG):  $3 \times 12$  for 18k, 24k, and 30k
- b. Power Wiring and Communication Wiring from Outdoor Unit to Indoor Unit (No. x AWG) 3 x 14 / 2 x 18.
- Piping lengths are equivalent.
- Sound pressure levels are tested in an anechoic chamber under ISO Standard 3745.
- 5. This data is rated 0 ft. above sea level, with 0 ft. level difference between outdoor and indoor units, and
- the following refrigerant pipe lengths: KUMXA181A:  $16.4 \, \text{ft.} \, \text{x} \, 2 = 32.8 \, \text{ft.}$ ; KUMXA241A:  $16.4 \, \text{ft.} \, \text{x} \, 3 = 49.2 \, \text{ft.}$ ; KUMXA301A:  $16.4 \, \text{ft.} \, \text{x} \, 4 = 65.6 \, \text{ft.}$  6. All capacities are net with a combination ratio between 95 105%.
- 7. Must follow installation instructions in the applicable LG installation manual. 8. Refer to the Combintion Data Manual for combination capacity tables.
- 9. See the Performance Data Manual for sensible and latent capacities.












Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps (excluding ductless systems) must be matched with appropriate coil components to meet ENERGY STAR\* criteria. Ask your contractor for details or visit www.energystar.gov. (ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency.)

# KUMXA181A

R32 Multi F with LGRED° Outdoor Unit Outdoor Unit (ODU) - KUMXA181A



Tag No.: Date: PO No.:

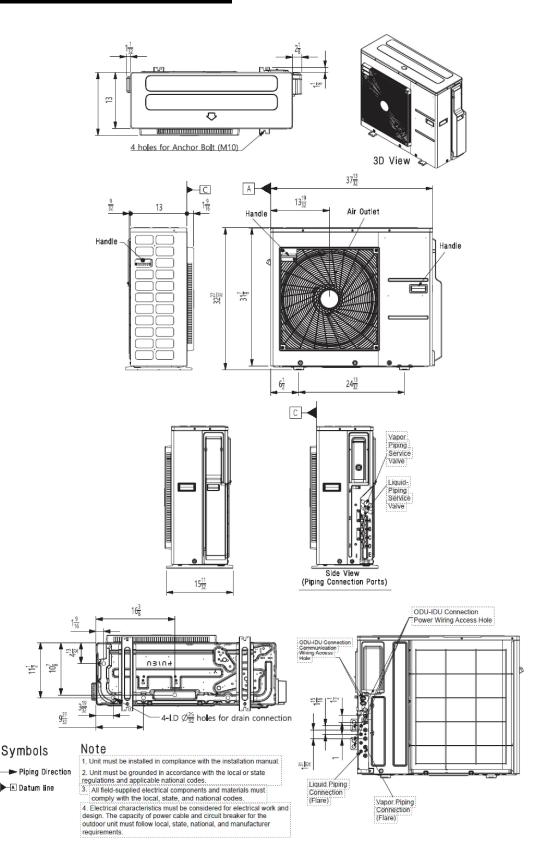

7

Symbols

▶ A Datum line