

# INSTALLATION INSTRUCTIONS FOR P1314-077-L

For LED Pendant

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**  
**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DO DISJONCTEUR.**

## PREPARATION

1. Shut off power at the fuse box or circuit breaker box.  
If necessary remove the old fixture and mounting hardware.
2. In some areas, the laser cut shade may be sharp.  
Use the included gloves to help protect hands from scratches.
3. Carefully unpack your new fixture and lay out all parts on a clear area. Take care not to lose any small parts necessary for installation.

## ASSEMBLING THE FIXTURE (Fig.1)

4. This fixture includes three 12" and one 6" rod. Determine the desired hanging and connect rods (H), (J), (K), (L), with nipples (I). Attach the rod assembly to nipple (M) on the fixture body. Attach the rod assembly to the swivel (G) on canopy (E).
5. Remove the LED driver (D) from canopy (E). Connect the red wire from the driver to the red wire from the fixture. Connect the black wire from driver to the black wire from fixture. Secure all wires with the wire nuts provided (See Fig. 1-1). Secure the LED driver (D) to canopy (E) with screw (C).
6. Attach mounting strap (A) to the junction box with screws (B) (Size: 8-32\*1/2"L).

## CONNECTION THE WIRES (Fig. 2)

7. Connect the electrical wires as shown in Fig.2, making sure that all wire nuts are secured. If your outlet has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the circular strap using the green screw provided. Tuck the wire connections neatly into the junction box.

## FINISHING THE INSTALLATION (Fig. 1)

8. Align canopy (E) to mounting strap (A) and secure with screws (F).
9. Hang crystal strands (P1), (P2), (P3) through the loops on pan (O). Hang crystal strands P1 (16pcs included) on the outside loops. Hang crystal strands P2 (10pcs included) on the middle loops. Hang crystal strands P3 (4pcs included) on the center loops.
10. Align cage (R) to metal pan (O) and secure with screws (N) to bracket (Q) on cage (R).

Your installation is now complete. Return power to the junction box and test the fixture.

**CAUTION /ATTENTION:** When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base or ceiling plate (G) only.

### Notice

Due to the techniques used in manufacturing of this product, small tooling marks may be visible on the outside of the shade where it is attached to the support frame. All products are inspected to ensure they adhere to our quality control standards.

Fig.1


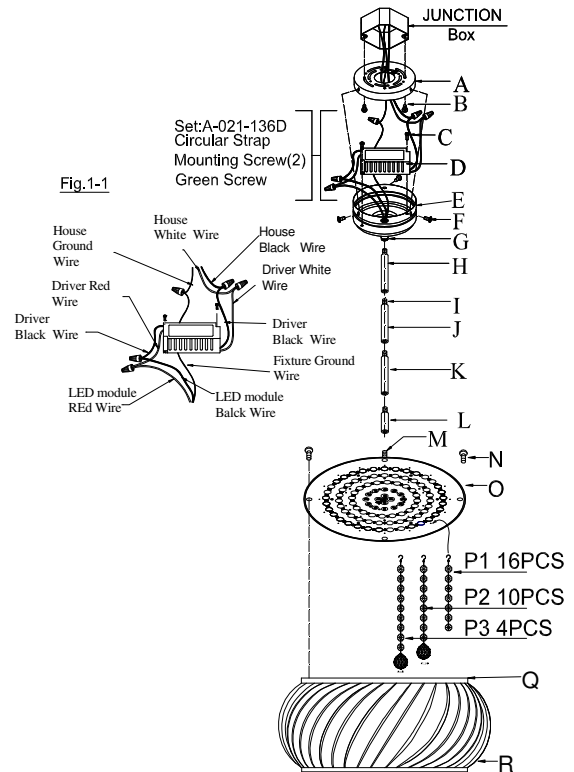


Fig. 2



**IMPORTANT:** Fixture should be installed by a qualified electrician to ensure proper wiring and installation. Dimmable with C-L (CFL & LED) type and Incandescent/Halogen type dimmers

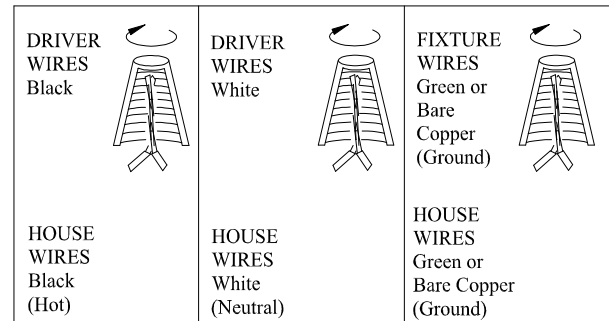

**Replacing LED module and driver (Fig.3 & Fig.1)**

The LED module and driver can be replaced by a qualified electrician without cutting of wire and without damage to any decorative element to which the fixture is attached. See installation steps for more details.

**Warning: Turn off power at the circuit breaker before replacing LED module or LED driver.**


**Replacing LED module (Fig.3)**

- Loosen screw (N) on the metal pan (O) and remove the cage (R) and all of the crystal strands (P1), (P2), (P3).
- Loosen screw (T) and hex nut (D') to remove metal panel (C').
- Unscrew hex nut (B') and gasket (A') and disconnect the led module by unplug the wire connector (X) and (Y).
- Carefully remove LED module (Z).
- Reverse steps a-d for installing the new LED module
- Note: The LED module should be provided by a specified supplier.
- For better heat dissipation the LED module should be applied with thermal grease when re-lamping.

**Replacing LED driver (Fig.1)**

- Loosen screws (F) to remove canopy (E) from mounting strap (A). Loosen the wire nut to disconnect the driver and remove whole fixture.
- Remove old LED driver (D) from canopy (E) and replace with new one.

Fig. 3

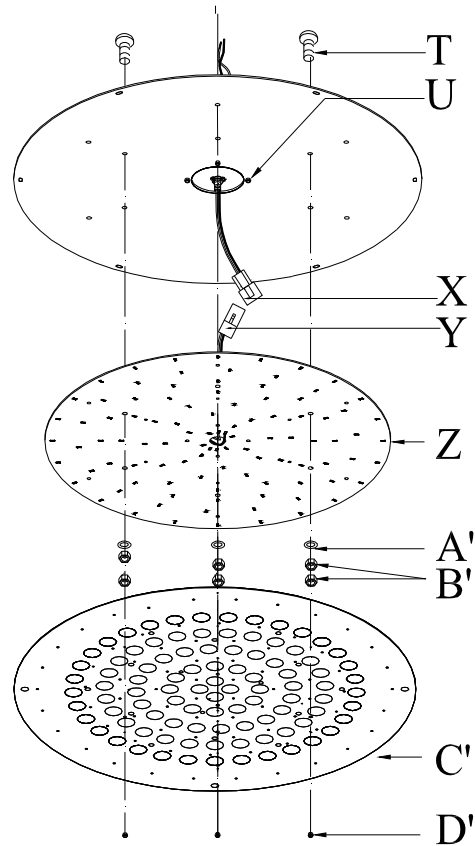

Brand: Lutron

Ordering Information    ■ Boxed    ● Clamshell

Model number	Product name	Control type	Maximum capacity
■ DVCL-153P-	Diva-C-L	Single-pole/3-way dimmer-	150 W CFL/LED or 600 W Incandescent/ Halogen 120 V
● DVCL-153PH-			
■ DVSCCL-153P-	Diva C-L Satin Colors		
■ CTCL-153P-	Skylark Contour C-L		
● CTCL-153PH-			
■ AYCL-153P-	Ariadni C-L	Single-pole lamp dimmer	100W CFL/LED or 250W Incandescent/ Halogen 120v
● AYCL153PH-			
● TTCL-100H-	Credenza C-L		