

GENERAL DESCRIPTION:

Cast brass body. All metal handle. Washerless 35 mm ceramic disc valve cartridge with integral hot limit safety stop. Braided flexible supply hoses with 3/8" compression connectors. Brass push pop-up drain. body with 1-1/4" (32 mm) tail piece. 1.2 gpm/4.5 L/min. maximum flow rate. Fitting can be mounted on 4" centers using optional escutcheon (7353101P) or single hole mounting method.

PRODUCT FEATURES:

- Ceramic Disc Valve Cartridge:** Assures a lifetime of smooth handle operation and drip-free performance.
- Adjustable Hot Limit Safety Stop:** Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.
- Exclusive Brass Push Pop-up Drain:**
 - Brass push pop-up drain.
 - Fewer parts. Installs in less time.
- Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average.


SUGGESTED SPECIFICATION


Single control lavatory faucet shall feature a cast brass body with metal lever handle. Fitting shall be equipped with flexible supplies with 3/8" compression connectors. Shall also feature washerless ceramic disc valve cartridge with integral hot limit safety stop. Shall feature a brass push pop-up drain. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 7353101.

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ASME A112.18.1**
- CSA B125.1**
- NSF/ANSI/CAN 61: Q<1**
- NSF/ANSI/CAN 372**
- ANSI A117.1**

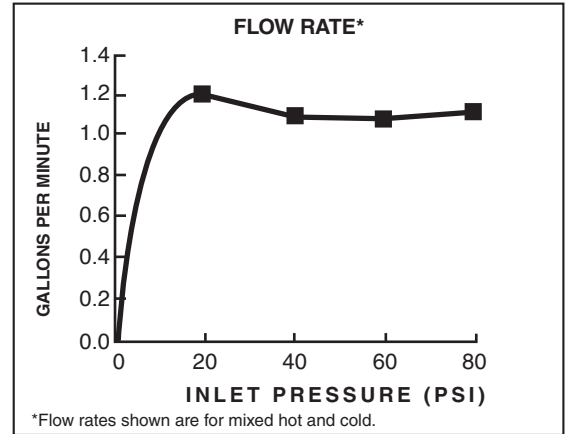

Product Number	Description	Finish Options					
		Polished Chrome	Polished Nickel	Legacy Bronze	Brushed Nickel	Matte Black	Brushed Cool Sunrise
		002	013	278	295	243	GN0
7353101	Townsend Single Control Monoblock. Brass push pop-up drain. 	✓	✓	✓	✓	✓	✓
7353101P	Optional Escutcheon Plate Only (For mounting on 4" centers)	✓	✓	✓	✓	✓	✓