

## CHAMPION® PRO RIGHT HEIGHT® ELONGATED TOILET


VITREOUS CHINA

#### & BARRIER FREE

#### CHAMPION® PRO RIGHT HEIGHT® ELONGATED TOILET

#### □ 211AA.004

- Features Champion<sup>®</sup> Flushing System
- Vitreous china
- Low consumption (1.6 gpf/6.0 Lpf) toilet
- Trade exclusive tank
- PowerWash® rim scrubs bowl with each flush
- Robust metal trip lever & metal shank fill valve
- Includes EZ-Install tools w/color match bowl caps
- EverClean® Surface included
- 4" piston-action Accelerator<sup>™</sup> flush valve
- Fully-glazed 2-3/8" trapway
- 16-1/2" rim height for accessible applications
- 12" (305mm) rough-in
- Generous 9" x 8" water surface area
- Chrome finish trip lever is supplied
- 1,000g MaP Score\*\* at 1.6gpf
- 10 year warranty



- □ 3195A.101 Right Height® Elongated Bowl
- ☐ 4225A.004 Tank

#### **Nominal Dimensions:**

768 x 483 x 785mm (30-1/4" x 19" x 30-7/8")

Fixture only, seat and supply sold separately

#### **Alternative Tank Configurations Available:**

- 4225A.064 Tank complete with tank cover locking device
- □ 4225A.005 Tank complete with trip lever located on right side

#### **Compliance Certifications -**


#### **Meets or Exceeds the Following Specifications:**

 ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures

### To Be Specified:

- ☐ Color: ☐ White ☐ Bone ☐ Linen ☐ Black
- ☐ Seat: #5325.010 Elongated Champion® Slow Close solid plastic seat and cover
- ☐ Supply with stop:



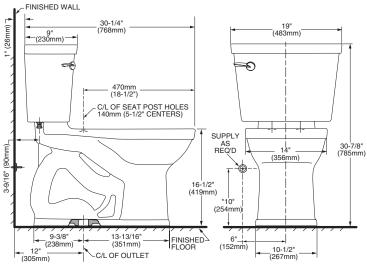

#### NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.





<sup>\*\*</sup> Maximum Performance (MaP) testing performed by IAPMO R&T Lab. MaP Report conducted by Veritec Consulting, Inc. and Koeller and Company.



# CHAMPION® SLOW-CLOSE TOILET SEATS

#### **CHAMPION® SLOW-CLOSE TOILET SEATS**

- ☐ **5325.010** Elongated
- ☐ **5330.010** Round Front
  - Solid plastic seat
  - Closed seat with cover
  - Convenient Slow-Close features prevents seat from slamming
  - Unique Easy Lift off feature allows for quick removal and replacement of seat and cover for easy cleaning of toilet without any tools
  - Seat complete with bolts and dual-faced adhesive
  - Fits any standard elongated (5325.010) or round front (5330.010) toilets

#### **AVAILABLE REPLACEMENT PARTS**

• **760084-0070A** Toilet Seat Bolt Kit (complete with bolts, nuts and washers)





SHOWN: CONVENIENT SLOW CLOSE FEATURE



## SHOWN: UNIQUE EASY LIFT OFF FEATURE

- Left rotate hinge counter clockwise to unlock
- Center seat removed from hinge system
- Right rotate hinges clockwise to lock seat in place