




CEILING CYLINDER PENDANT (CABLE VERSION) INSTALLATION INSTRUCTIONS

WARNING


IMPORTANT: NEVER attempt any work without shutting off the electricity.

- Read all instructions before installing.
- System is intended for installation by a qualified electrician in accordance with the National Electrical Code and local regulations.
- Go to the main fuse box, or circuit breaker. Place the main power switch in the "OFF" position and unscrew the fuse(s) or switch "OFF" the circuit breaker switch(es) that control the power to the fixture or room that you are working on.
- Place the wall switch in the "OFF" position.
- Supply conductors (Power Wires) Connecting the fixture must be rated minimum 90°C. If uncertain, consult an electrician.

TOOLS REQUIRED

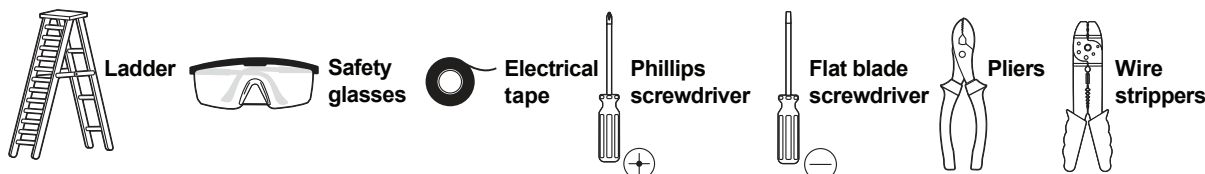

INCLUDED ACCESSORIES BAG

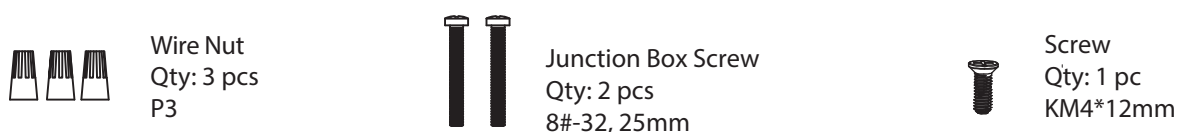

INSTALLATION

Uses 3-1/2" junction box, 4" junction box.

1. All wiring must take place inside the junction box (not included) Check power wires for damage or scrapes. Consult a qualified electrician to ensure correct branch circuit conductor before installing.
2. Disconnect electrical power at the fuse or circuit breaker box before installing or servicing any part of this fixture.
3. Carefully remove the fixture and hardware kit from the carton.
4. Remove the mounting bracket from the back of the fixture by removing two screw as Fig.1.
5. Install the provided mounting plate to the junction box using the junction box screws provided.
6. CCT switch is located behind the fixture. Adjust switch to desired temperature of 2700K, 3000K, 3500K, 4000K, or 5000K .

Note: Fixture is preset to 3000K from factory. Power to the fixture must always be turned OFF prior to adjusting the CCT switch.

7. Connect supply wires to fixture wires and insulate with proper wire nuts.

Connect incoming ground wire to mounting plate ground wire (green).

Connect incoming common wire to fixture common (white).

Connect incoming hot wire to fixture black wire.

8. Align the two side holes on the fixture base with the two screw holes on the mounting bracket, then secure with screws.

9. Restore power at the fuse or circuit breaker box





Fig. 1

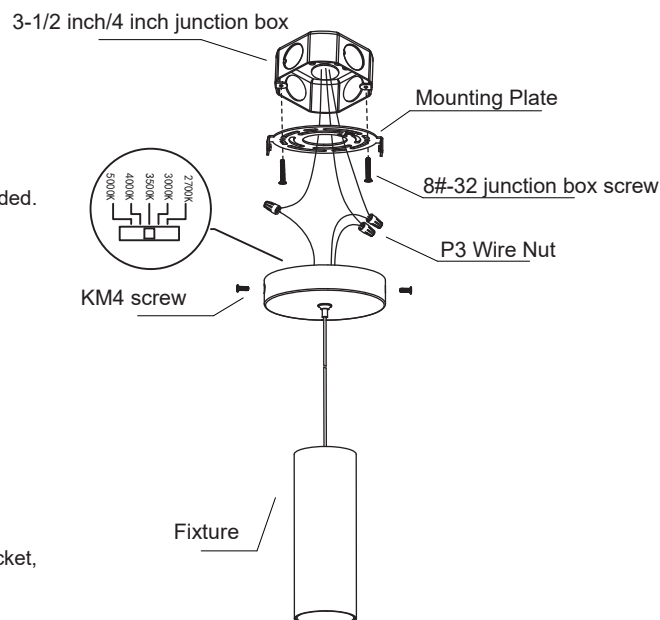

TECHNICAL SPECIFICATIONS

Model Number	LED-16331 BK
Wattage	14W
Input Voltage	120V, 60HZ
Lumens	1000
CCT	2700K/3000K/3500K/4000K/5000K
CRI	90