


ASSEMBLY INSTRUCTIONS

Hughes 40" Ring Chandelier

Item # RL5815

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

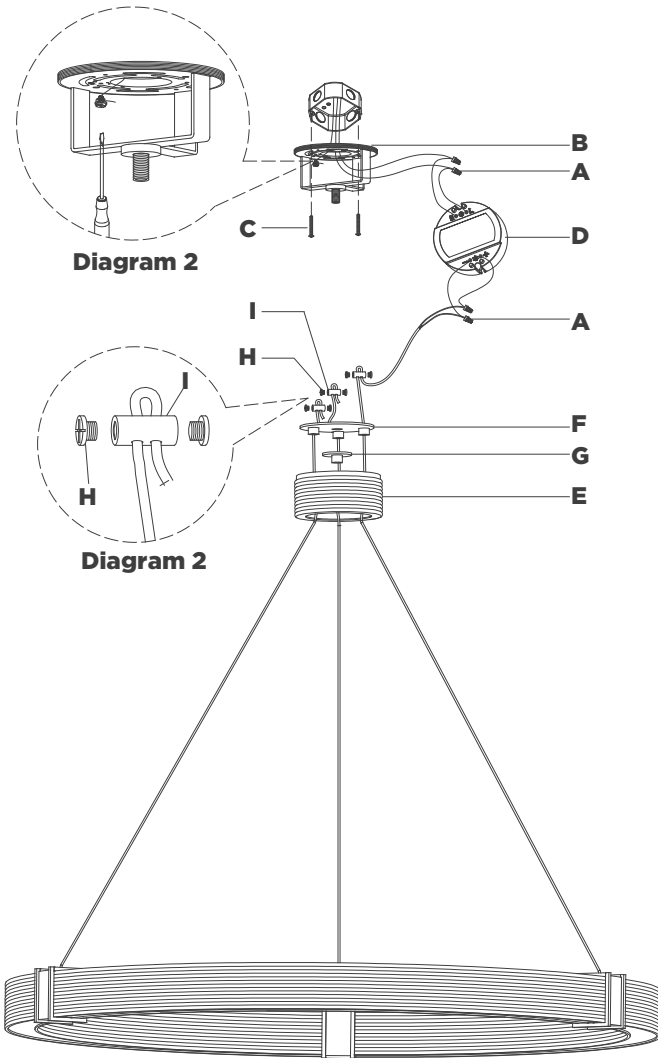

TOOLS REQUIRED (NOT INCLUDED):


Phillips Screwdriver Slotted Screwdriver Wire Strippers
Wire Cutters Measuring Tape

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove canopy (E) from mounting plate (B) by unscrewing.
3. Remove mounting plate (B) from metal plate (F) by removing collar ring (G).
4. Install mounting plate (B) to the junction box and secure with mounting screws (C).
5. Connect supply ground wire (usually green or bare copper) around the green grounding screw (see diagram 1). Tighten.
NOTE: It is imperative that the fixture is grounded.
6. Route three hanging cables through canopy (E) and metal plate (F), then install hanging cables to cable nut (I) and secure with set screws (H). Adjust hanging cable to desired height as needed (see diagram 2).
7. After fixture height is achieved shorten the wires by using pair of cutters (not included).
NOTE: Make sure fixture height and fixture level are accurate before cutting wires. Leaving enough length for fixture wire (marked +/-) to connect to the driver.

RALPH LAUREN



ASSEMBLY INSTRUCTIONS

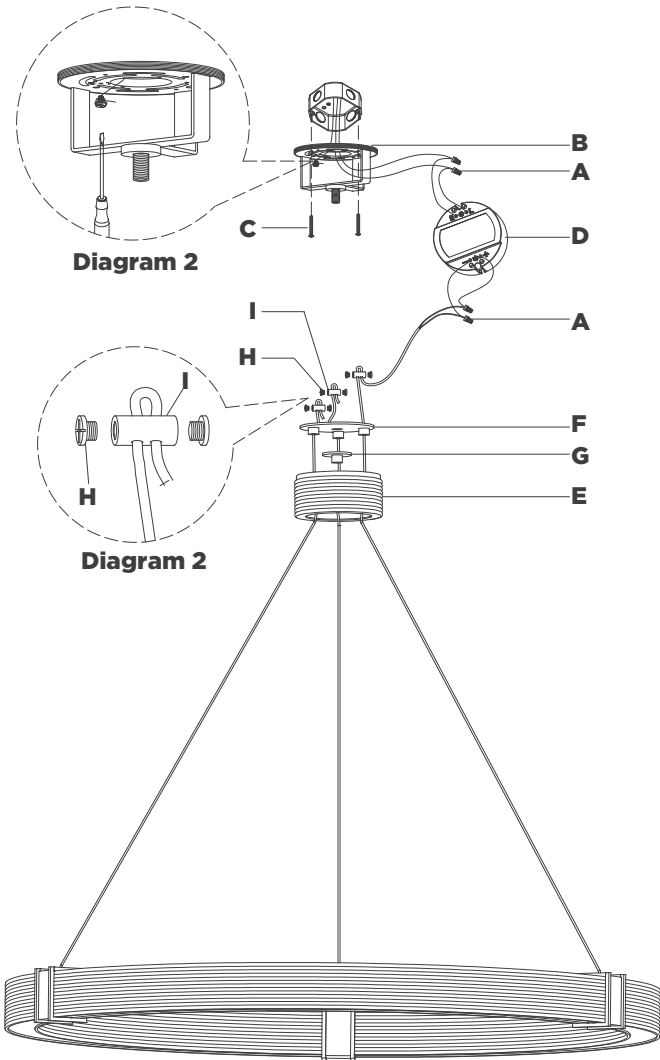

Hughes 40" Ring Chandelier

Item # RL5815

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

8. Remove outer housing of wire by making a neat cut all the way around, about 1" from the end. Once cut is made, remove and discard the 1" piece of housing, exposing the electrical wires.

NOTE: Make sure not to cut too deep into housing or electrical wires could become damaged.

9. Separate wires, and strip insulation on each 5/8".
10. Install metal plate (F) to mounting plate (B) and secure with collar ring (G).
11. Connect fixture neutral wire (black) to driver (D) output wire (black) using wire nut (A).
12. Connect fixture hot wire (red) to driver (D) output wire (red) using wire nut (A).
CAUTION: Do not reverse the hot and neutral connections.
13. Connect driver (D) input neutral wire (white) to the supply neutral wire (usually white) using wire nut (A).
14. Connect driver (D) input hot wire (black) to the supply hot wire (usually black) using wire nut (A).
CAUTION: Do not reverse the hot and neutral connections.
15. Make sure all wire connections are tight, then carefully tuck into the junction box.
16. Insert driver (D) into mounting plate (B) bracket.
17. Thread canopy (E) to mounting plate (B).

CARE INSTRUCTIONS: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

RALPH LAUREN