

INSTALLATION INSTRUCTION

358 – LED Wall Sconce

WS-35819/ WS-35825/ WS-35837/ WS-35849/WS-35861

WAC LIGHTING

Responsible Lighting®

WARNING

IMPORTANT: NEVER attempt any work without shutting off the electricity.

- Read all instructions before installing.
- System is intended for installation by a qualified electrician in accordance with the National Electrical Code and local regulations.
- Go to the main fuse box, or circuit breaker. Place the main power switch in the "OFF" position and unscrew the fuse(s) or switch "OFF" the circuit breaker switch(es) that control the power to the fixture or room that you are working on.
- Place the wall switch in the "OFF" position.

CAUTION

- All parts must be used as indicated in these instructions. Do not substitute any parts, leave parts out, or use any parts that are worn out or broken. Failure to follow this instruction could invalidate the ETL/CETL listing of this fixture.
CAUTION When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.

AVERTISSEMENT

IMPORTANT : Coupez l'électricité avant TOUTE manipulation.

- Lisez toutes les instructions avant d'installer.
- Système est destiné à être installé par un électricien qualifié en conformité avec le code national de l'électricité et les règlements locaux.
- Accédez au panneau central de disjoncteurs ou de fusibles de votre demeure et placez l'interrupteur principal en position d'arrêt (« OFF »).
- Placez l'interrupteur mural en position d'arrêt (« OFF »).

MISE EN GARDE

- Toutes les pièces doivent être utilisées tel qu'il est indiqué dans ces instructions. Ne remplacez pas les pièces, n'en laissez pas de côté et ne les utilisez pas si elles sont usées ou brisées. Le non-respect de ces instructions peut annuler l'homologation ETL/CETL du luminaire. MISE EN GARDE Ors de la manipulation de l'appareil, ne pas appliquer de pression à la LED, tenir l'appareil par la seule base.

ADVERTENCIA

IMPORTANTE: NUNCA intente hacer trabajos sin desconectar el suministro eléctrico.

- Lea y comprenda todas las instrucciones e ilustraciones por completo antes de proceder con el ensamblaje e instalación de esta lámpara.
- Sistema está diseñado para ser instalado por un electricista calificado, de acuerdo con el código eléctrico nacional y las normas locales.
- Diríjase a la caja de fusibles o a la caja del interruptor de circuito principal en su hogar. Coloque el interruptor de alimentación principal en la posición "OFF" (APAGADO).
- Coloque el interruptor de la pared en la posición "OFF" (APAGADO).

PRECAUCIÓN

- Todas las piezas deben usarse como lo indican estas instrucciones. No reemplace las piezas, no omita piezas durante la instalación ni utilice piezas gastadas o rotas. El incumplimiento de esta indicación podría invalidar la calificación ETL/CETL esta lámpara. PRECAUCIÓN Al manipular el aparato, no aplique presión a los LED, mantenga el aparato en la base sólo.

HARDWARE



Wire Connector
Qty: 3pcs+1 Extra
7EAC112201



Mounting Screw
Qty:2pcs+1 Extra
7MPF0308S1 (AL)
4MPF0308S3W5(WT)
1/8"-40X3/8
Nickel Plating/White



Assembly Screw
Qty:2pcs+1 Extra
1/8"-40x1
Nickel Plating



Silicon Gasket
Qty:2pcs
7TGD272501CL



Decorative Plate
Qty:1pc
4MBA121244BA(AL)
4MBA121244W10(WT)



Plastic Anchor
Qty: 2pcs+1 Extra
7TDD082401



Wood Screw
Qty: 2pcs+1 Extra
7MPF2204J2
Φ 4X22

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760



INSTALLATION INSTRUCTION

358 – LED Wall Sconce

WS-35819/ WS-35825/ WS-35837/ WS-35849/ WS-35861

WAC LIGHTING

Responsible Lighting®

Fig.1


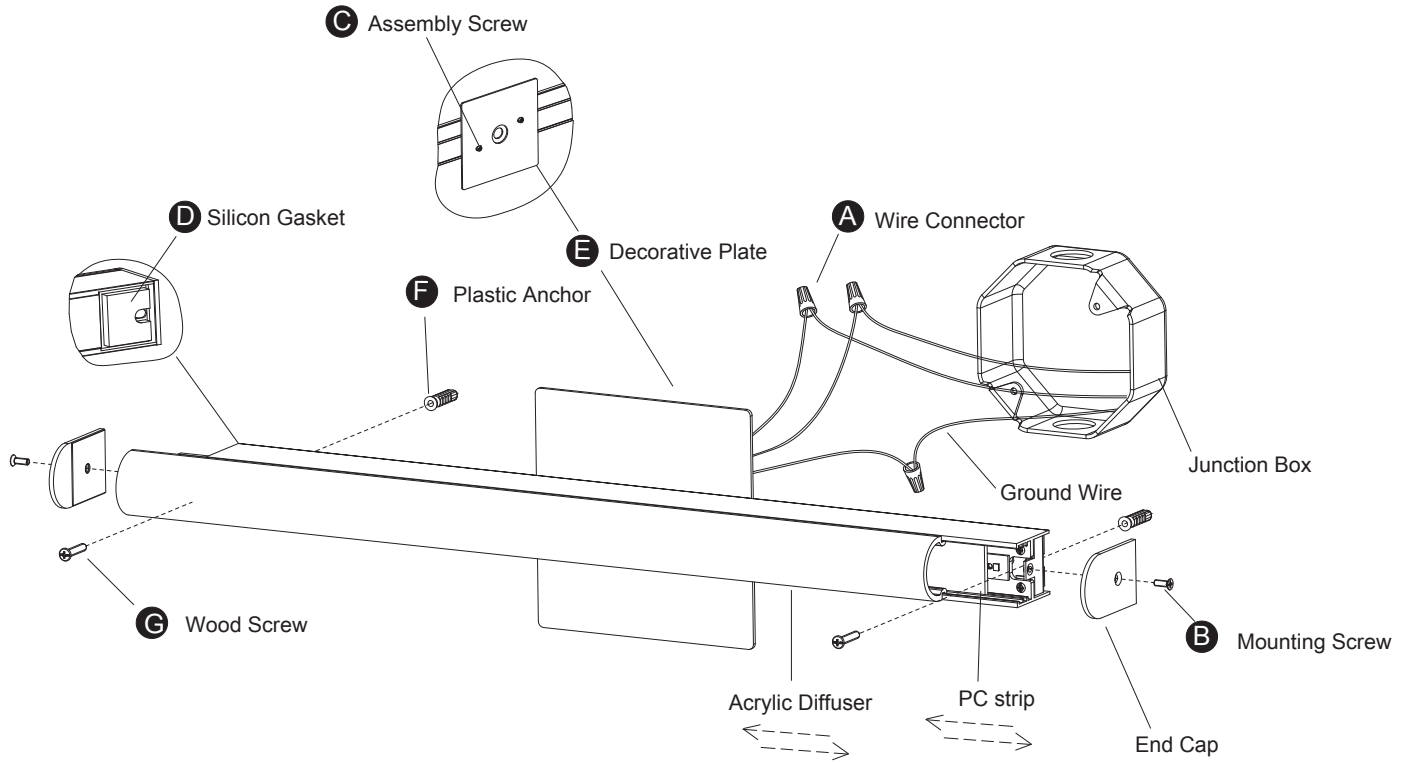


Fig.2

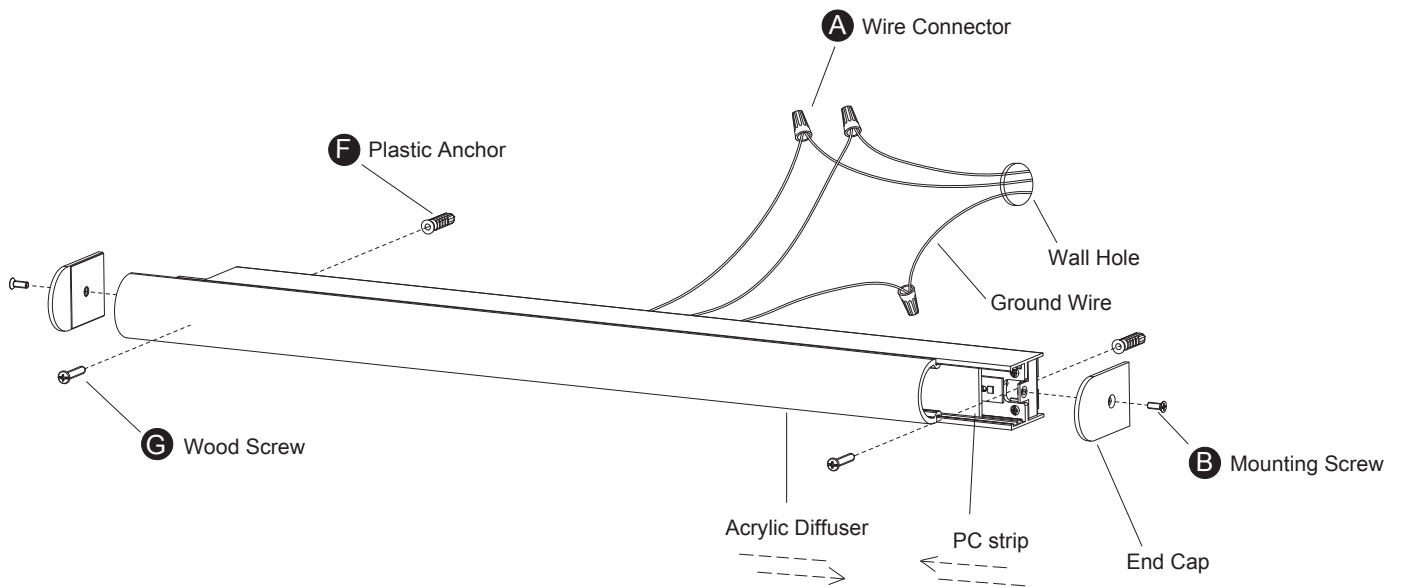

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760



INSTALLATION INSTRUCTION

358 – LED Wall Sconce

WS-35819/ WS-35825/ WS-35837/ WS-35849/ WS-35861

WAC LIGHTING

Responsible Lighting®

Installation Location

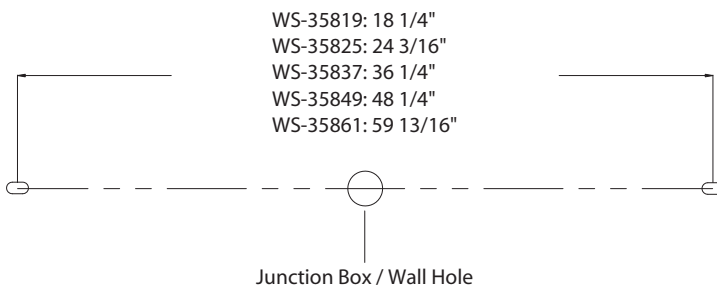


Fig.3 Wiring



Fixture Wires	House Wires
Black or Smooth	Black (Hot)
Fixture Wires	House Wires
White or Ribbed	White (Neutral)
Fixture Wires	House Wires
Bare wire (Ground)	Green or Bare Copper (Ground)

PREPARATION

1. Shut off the power at the circuit breaker and remove existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.

MOUNT ON THE JUNCTION BOX (Fig. 1)

3. Drill a fixture mounting hole according to (installation location), insert the plastic anchor (F). Line up the center line of the drill holes with respect to the center line of the junction box to allow the decorative plate (E) properly cover up the junction box opening on the wall.
4. Secure the decorative plate (E) to the fixture with assembly screw (C), then replace the existing silicon gasket with the supplied silicon gasket (D).
5. Remove the mounting screw (B) and the end cap from the fixture.
6. Connect the fixture's wires to house wires as shown in Fig.3, making sure that all wire connectors (A) are secured. If your outlet box has a green or bare copper ground wire, connect the fixture's ground wire to it. Otherwise, tuck the fixture's ground wire directly to the fixture. After wires are connected, tuck them carefully inside the junction box.
7. Slide acrylic diffuser and PC strip slightly out of the way to review the plastic anchor location on the back, then fasten the fixture to the wall using wood screw (G), make sure to align the decorative plate to adequately cover the junction box wall opening.
8. Secure the end cap to the fixture using mounting screw (B) to seal the acrylic diffuser.

OR

MOUNT WITHOUT JUNCTION BOX (Fig. 2)

3. Drill a fixture mounting hole according to (installation location), insert the plastic anchor (F).
4. Remove the mounting screw (B) and the end cap from the fixture.
5. Drill a small access hole in the wall behind the fixture and pull the house wires through the wall.
6. Connect the fixture's wires to house wires as shown in Fig.3, making sure that all wire connectors (A) are secured. If your outlet box has a green or bare copper ground wire, connect the fixture's ground wire to it. Otherwise, tuck the fixture's ground wire directly to the fixture. After wires are connected, tuck them carefully inside the wall hole.
7. Slide acrylic diffuser and PC strip slightly out of the way to review the plastic anchor location on the back, then fasten the fixture to the wall using wood screw (G).
8. Secure the end cap to the fixture using mounting screw (B) to seal the acrylic diffuser.

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760



INSTALLATION INSTRUCTION

358 – LED Wall Sconce

WS-35873/WS-35897

WAC LIGHTING

Responsible Lighting®

WARNING

IMPORTANT: NEVER attempt any work without shutting off the electricity.

- Read all instructions before installing.
- System is intended for installation by a qualified electrician in accordance with the National Electrical Code and local regulations.
- Go to the main fuse box, or circuit breaker. Place the main power switch in the "OFF" position and unscrew the fuse(s) or switch "OFF" the circuit breaker switch(es) that control the power to the fixture or room that you are working on.
- Place the wall switch in the "OFF" position.

CAUTION

- All parts must be used as indicated in these instructions. Do not substitute any parts, leave parts out, or use any parts that are worn out or broken. Failure to follow this instruction could invalidate the ETL/CETL listing of this fixture.
CAUTION When handling the fixture, do not apply pressure to the LEDs. Hold the fixture by the base only.

AVERTISSEMENT

IMPORTANT : Coupez l'électricité avant TOUTE manipulation.

- Lisez toutes les instructions avant d'installer.
- Système est destiné à être installé par un électricien qualifié en conformité avec le code national de l'électricité et les règlements locaux.
- Accédez au panneau central de disjoncteurs ou de fusibles de votre demeure et placez l'interrupteur principal en position d'arrêt (« OFF »).
- Placez l'interrupteur mural en position d'arrêt (« OFF »).

MISE EN GARDE

- Toutes les pièces doivent être utilisées tel qu'il est indiqué dans ces instructions. Ne remplacez pas les pièces, n'en laissez pas de côté et ne les utilisez pas si elles sont usées ou brisées. Le non-respect de ces instructions peut annuler l'homologation ETL/CETL du luminaire. MISE EN GARDE Ors de la manipulation de l'appareil, ne pas appliquer de pression à la LED, tenir l'appareil par la seule base.

ADVERTENCIA

IMPORTANTE: NUNCA intente hacer trabajos sin desconectar el suministro eléctrico.


- Lea y comprenda todas las instrucciones e ilustraciones por completo antes de proceder con el ensamblaje e instalación de esta lámpara.
- Sistema está diseñado para ser instalado por un electricista calificado, de acuerdo con el código eléctrico nacional y las normas locales.
- Diríjase a la caja de fusibles o a la caja del interruptor de circuito principal en su hogar. Coloque el interruptor de alimentación principal en la posición "OFF" (APAGADO).
- Coloque el interruptor de la pared en la posición "OFF" (APAGADO).

PRECAUCIÓN

- Todas las piezas deben usarse como lo indican estas instrucciones. No reemplace las piezas, no omita piezas durante la instalación ni utilice piezas gastadas o rotas. El incumplimiento de esta indicación podría invalidar la calificación ETL/CETL esta lámpara. PRECAUCIÓN Al manipular el aparato, no aplique presión a los LED, mantenga el aparato en la base sólo.

HARDWARE

A



Wire Connector
Qty: 3pcs+1 Extra
7EAC112201

B



Mounting Screw
Qty: 2pcs+1 Extra
7MPF0308S1(AL)
4MPF0308S3W5(WT)
1/8"-40X3/8
Nickel Plating/White

C



Assembly Screw
Qty: 2pcs+1 Extra
1/8"-40x1
Nickel Plating

D



Silicon Gasket
Qty: 2pcs
7TGD272501CL

E



Decorative Plate
Qty: 1pc
4MBA121244BA(AL)
4MBA121244W10(WT)

F



Plastic Anchor
Qty: 6pcs+1 Extra
7TDD082401

G



Wood Screw
Qty: 2pcs+1 Extra
7MPF2204J2
Φ 4X22

H



Tapping Screw
Qty: 4pcs+1 Extra
7MPF033502

wacighting.com

Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct
Lithia Springs, GA 30122



Western Distribution Center

1750 Archibald Avenue
Ontario, CA 91760



INSTALLATION INSTRUCTION
358 – LED Wall Sconce
 WS-35873/WS-35897

WAC LIGHTING
 Responsible Lighting®

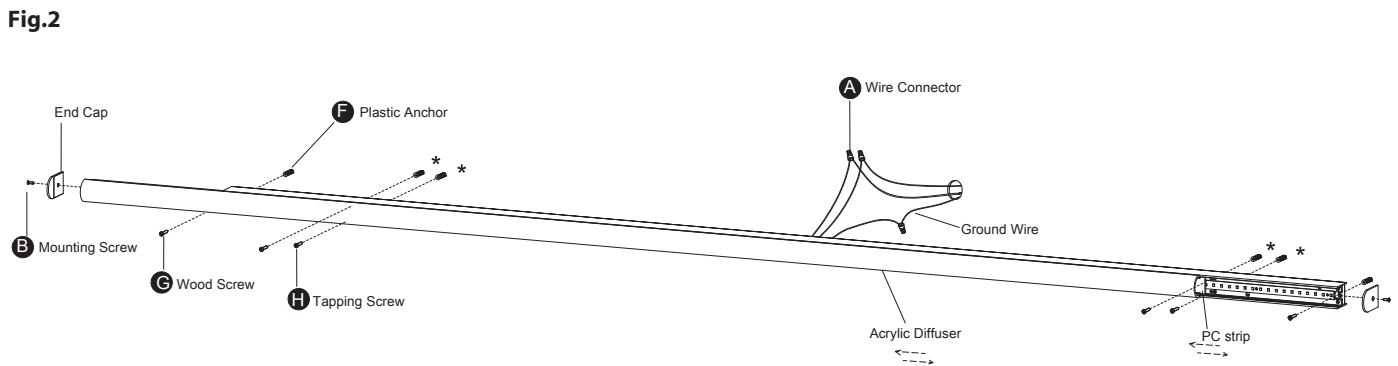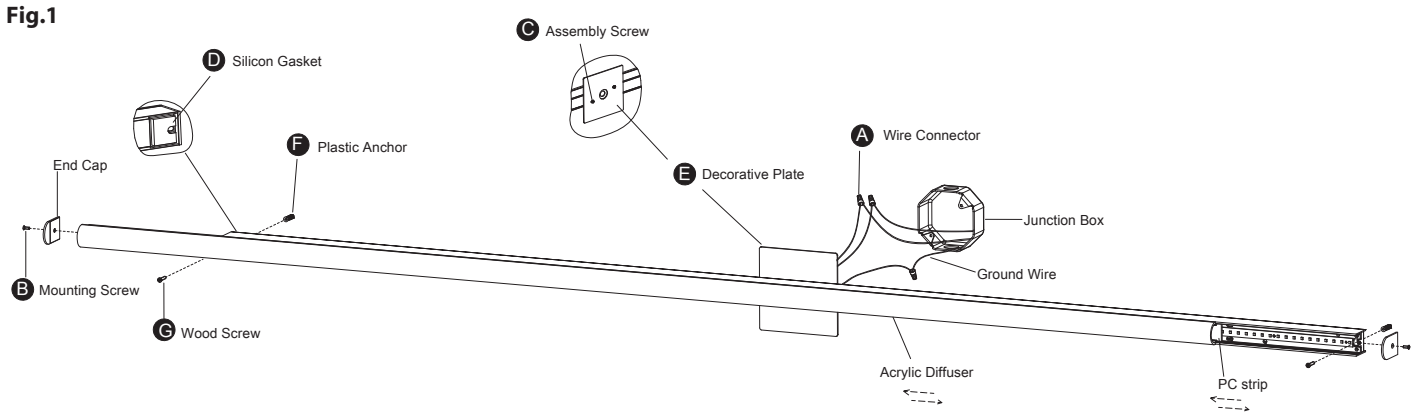

Installation Location


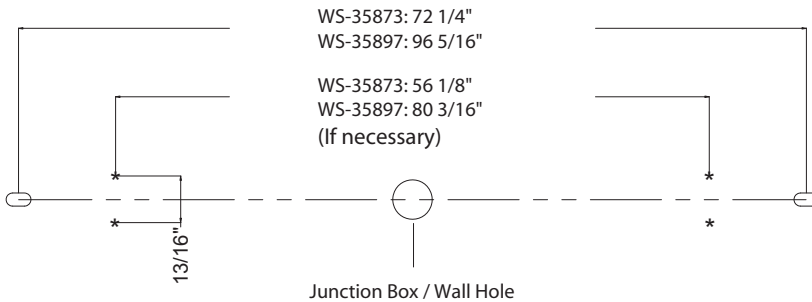


Fig.3 Wiring

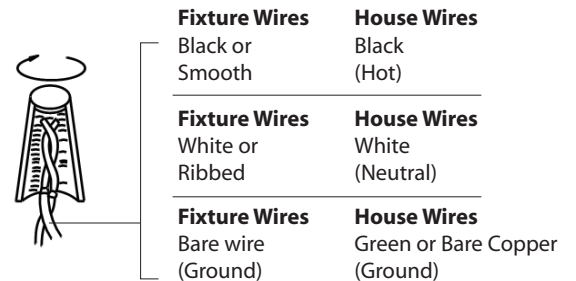

waclighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122

Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760



INSTALLATION INSTRUCTION

358 – LED Wall Sconce

WS-35873/WS-35897

WAC LIGHTING

Responsible Lighting®

PREPARATION

1. Shut off the power at the circuit breaker and remove existing fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.

MOUNT ON THE JUNCTION BOX (Fig. 1)

3. Drill a fixture mounting hole according to (installation location), insert the plastic anchor (F). Line up the center line of the drill holes with respect to the center line of the junction box to allow the decorative plate (E) properly cover up the junction box opening on the wall.
4. Secure the decorative plate (E) to the fixture with assembly screw (C), then replace the existing silicon gasket with the supplied silicon gasket (D)
5. Remove the mounting screw (B) and the end cap from the fixture.
6. Connect the fixture's wires to house wires as shown in Fig.3, making sure that all wire connectors (A) are secured. If your outlet box has a green or bare copper ground wire, connect the fixture's ground wire to it. Otherwise, tuck the fixture's ground wire directly to the fixture. After wires are connected, tuck them carefully inside the junction box.
7. Slide acrylic diffuser and PC strip slightly out of the way to review the plastic anchor location on the back, then fasten the fixture to the wall using wood screw (G), make sure to align the decorative plate to adequately cover the junction box wall opening.
8. Secure the end cap to the fixture using mounting screw (B) to seal the acrylic diffuser.

OR

MOUNT WITHOUT JUNCTION BOX (Fig. 2)

3. Drill a fixture mounting hole according to (installation location), insert the plastic anchor (F).
4. Remove the mounting screw (B) and the end cap from the fixture.
5. Drill a small access hole in the wall behind the fixture and pull the house wires through the wall.
6. Connect the fixture's wires to house wires as shown in Fig.3, making sure that all wire connectors (A) are secured. If your outlet box has a green or bare copper ground wire, connect the fixture's ground wire to it. Otherwise, tuck the fixture's ground wire directly to the fixture. After wires are connected, tuck them carefully inside the wall hole.
7. Slide acrylic diffuser and PC strip slightly out of the way to review the plastic anchor location on the back, then fasten the fixture to the wall using wood screw (G).

* If the fixture and wall have a large gap, tapping screw (H) can be used when installing the fixture.

8. Secure the end cap to the fixture using mounting screw (B) to seal the acrylic diffuser.

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760



