


Aspirations[™] Single Control Lavatory Faucet

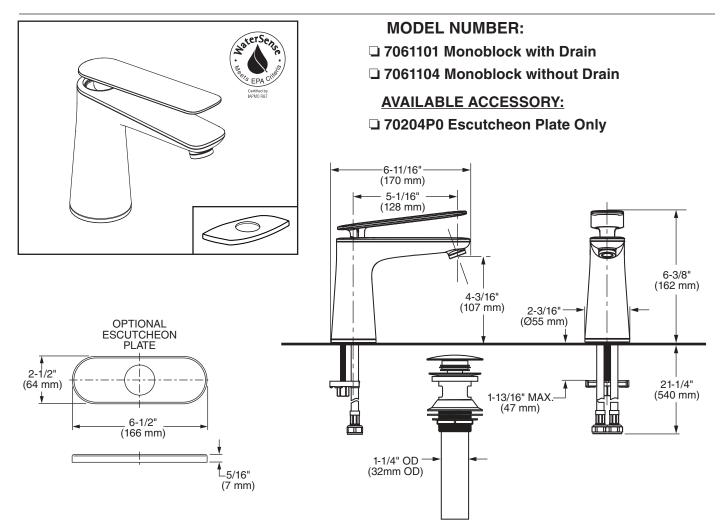

GENERAL DESCRIPTION:

Metal body and handle. Washerless 28 mm ceramic disc valve cartridge with integral hot limit safety stop. Braided flexible supply hoses with 3/8" compression connectors. Metal push pop-up drain body with 1-1/4" (32 mm) tail piece. 1.2 gpm/4.5 L/min. maximum flow rate. Fitting can be mounted on 4" centers using optional escutcheon (70204P0) or single hole mounting method.

PRODUCT FEATURES:

Metal Construction: Durable. Easy to clean. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridge: Assures a lifetime of smooth handle operation and drip-free performance.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

Metal Push Pop-up Drain:

- Easy to install, operate and remove clogs.
- Fewer parts. Installs in less time.
- No adjustments required seals the first time, every time.

Lead Free: Faucet contains $\leq 0.25\%$ total lead content by weighted average.

SUGGESTED SPECIFICATION

Single control lavatory faucet shall feature a metal body and metal lever handle. Fitting shall be equipped with flexible supplies with 3/8" compression connectors. Shall also feature washerless ceramic disc valve cartridge with an integral hot limit safety stop. Shall also feature a metal drain body. Fitting shall be American Standard Model # 7061101.XXX & 7061104.002.

© 2022 AS America, Inc. 12/22




Aspirations[™] Single Control Lavatory Faucet

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 CSA B125.1 NSF/ANSI/CAN 61: Q<1 NSF/ANSI/CAN 372

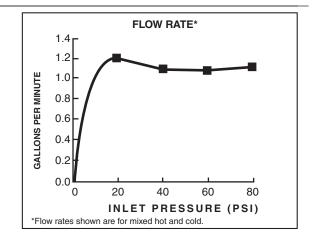

			Finish Options		
Due donat			Polished Chrome	PVD Brushed Nickel	Matte Black
Product Number	Description		002	295	243
7061101	Single Control Monoblock. with drain.	(¥)	/	/	/
70204P0	Optional Escutcheon Plate (for mounting on 4" centers).		/	/	/
7061104	Single Control Monoblock. without drain.	À	/		

Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.

PART OF LIXIL