

LYNBROOK 1.0 GPF BLOWOUT URINAL

- Vitreous china
- Low consumption (3.8 Lpf/1.0 gpf)
- Flushing rim
- Blowout flush action
- Privacy shields
- 1-1/4" inlet spud
- Outlet connection threaded 2" inside (NPTF)
- 2 wall hangers
- Fixture only
- Meets ASME flush requirements at 1.0 GPF

6601.012 Top spud

Nominal Dimensions:

356 x 470 x 730mm
(14" x 18-1/2" x 28-3/4")

Recommended working pressure – between
20 psi at valve when flushing and 80 psi static

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2 for Vitreous China Fixtures





SEE REVERSE FOR ROUGHING-IN DIMENSIONS

To Be Specified:

- Color: White
- Flush Valve:
 - American Standard 6045.601 Manual
(1-1/4" Top Spud)
 - American Standard Selectronic 6062.601
DC Power (1-1/4" Top Spud)

6601.012 TOP SPUD

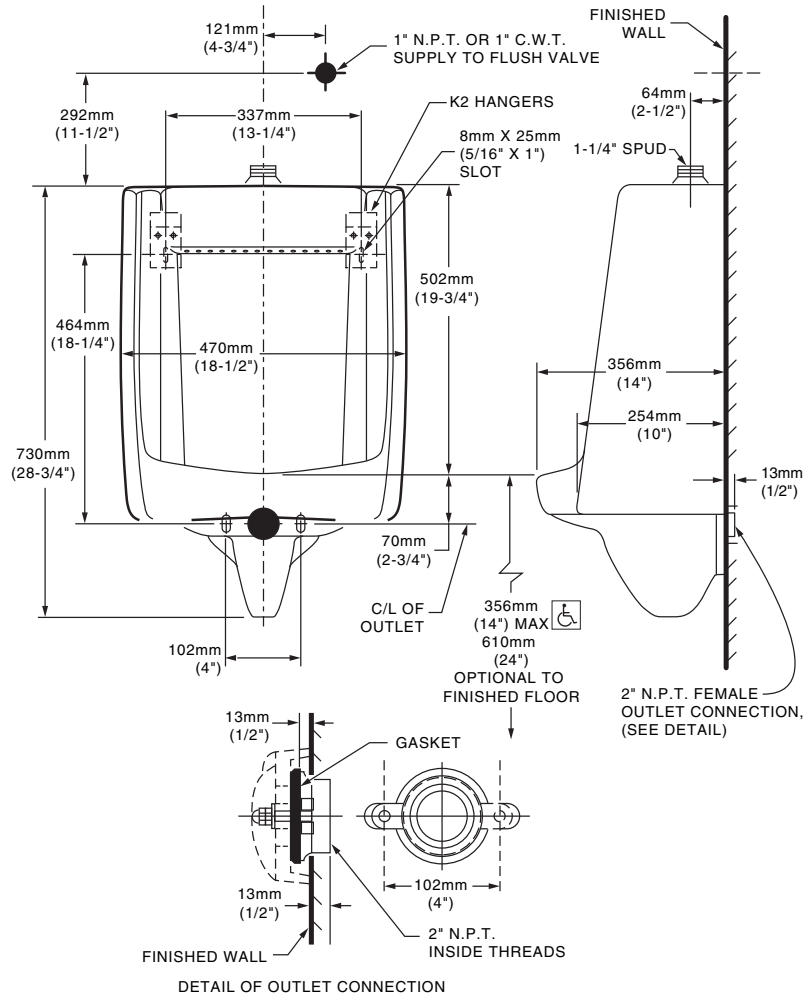

 **MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.**

● When installed so top of rim is 356mm (14") from finished floor.

NOTES:
FLUSH VALVE NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.