



OAK CREEK POST LGT TXT BLK ASSEMBLY/INSTALLATION INSTRUCTIONS

Item # 589192-TBK: OAK CREEK POST LGT TXT BLK

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

WARNING: Risk of Fire. Consult a qualified electrician to ensure correct branch circuit conductor. Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.


ASSEMBLY AND INSTALLATION

Turn off the power at fuse or circuit breaker.

1. Gently take all parts out of the package and lay them on a smooth surface.
2. Slip fixture over post and mark position of mounting holes in post.
3. Remove fixture from post.
4. Drill 3/16" diameter holes in post at positions marked.
5. Make wire connections with wire connectors:
 - A- Connect the black wire from the fixture to the black supply wires.
 - B- Connect the white wire from the fixture to the white supply wires.
 - C- If fixture is provided with ground wire, connect fixture ground wire to outlet box ground wire with wire connector.Never connect ground wire to black or white power supply wires.
6. Slip fixture over post and secure in place using provided screws. Screws should slip into holes drilled in post.
7. Install the bulb (not included) into the socket.
8. Place roof on top of fixture. Pass holes along edge of roof over threaded studs on fixture.
9. Thread ball knobs on to threaded studs. (Do not over tighten.)
10. Thread finial on to threaded pipe on top of the roof. (Do not over tighten.)

Turn on the power at fuse or circuit breaker

ASSEMBLY AND INSTALLATION (CONT.)

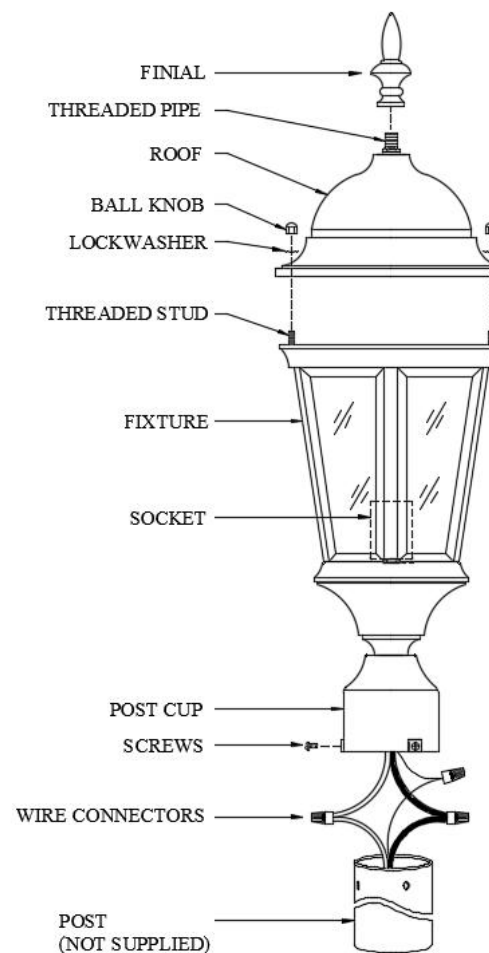

589192-TBK

**IF IN DOUBT ABOUT ELECTRICAL INSTALLATION,
CONSULT A LICENSED ELECTRICIAN.**

Customer Service 1-800-558-8700

Lamp Post Installation Guide

Please read all instructions carefully before installing fixtures.

CAUTION: Disconnect power at the breaker box before beginning installation. Turning off power at the switch alone is inadequate. To ensure your safety properly disconnect the main power supply or serious injuries may occur.

- We strongly recommend that you check your local wiring codes and consult an electrical contractor before installing post.
- We do not guarantee this method of installation satisfies your particular local building codes. Please call local municipality.
- Before starting any digging project, call 811 to prevent against unintentionally hitting any underground utility lines.

1

Dig a hole 12"- 15" in diameter to the depth shown in the diagram to the left. Consult local codes.

Dig an additional 6" depth and pour in 6" of gravel for drain- age purposes.

Dig trench from power source to lamp post hole. Check local codes for trench depth.

2

Lay pole on ground and feed power line (not included) beginning through the inlet hole to top of pole. Allow 10" of extra wire at top of pole and leave remainder of wire at the bottom for connection to power source.

3

Place pole in center of hole and fill with gravel or cement to just below the inlet hole as shown below. Check local codes.

Run the remainder of the power line through trench to connect to power source.

Bury the power line and pole base.

4

Connect convenience outlet, photocell, and fixture, if purchased. (Wire nuts not included)

NOTE: IF YOU PREFER THE CONVENIENCE OUTLET TO BE CONTROLLED BY PHOTOCELL, CONNECT PHOTOCELL FIRST.

connect wires black to black white to white ground to ground

Caulk the gap between the lamp post and the cross arm to prevent water seeping into the lamp post.

5

Insert cross arm, if purchased.

Turn on power.

SAFETY NOTE: Selecting a post for performance and safety requires a full understanding of various factors and conditions. Professional engineering assistance in selecting a post is highly recommended. Purchaser is responsible for meeting any codes or requirements. If you choose a post without getting such assistance, you do so at your own risk.