




TWO-HANDLE CENTERSET LAVATORY FAUCET WITH GOOSENECK SPOUT & FACTORY INSTALLED HANDLES



Faucet comes complete with factory installed handles. V=Vandal-Resistant, H=Standard

MODEL NUMBER:

- ☐ 7400.172H Centerset Lavatory Faucet
 Rigid gooseneck spout. 1.5 gpm pressure compensating aerator. Brass wrist blade handles. Less drain.
- ☐ 7400.172V Centerset Lavatory Faucet
 Rigid gooseneck spout. 1.5 gpm pressure compensating aerator. Vandal-resistant brass wrist blade handles.
 Vandal-resistant aerator. Less drain.

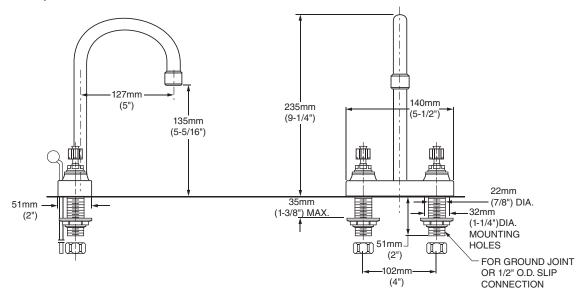

GENERAL DESCRIPTION:

Durable cast brass construction. Amarilis 1/4 turn washerless ceramic disc valve cartridges. One-half inch male inlet shanks with brass coupling nuts and shank nuts. Vandal-resistant faucets feature vandal-resistant aerators and index buttons on factory-installed handles. 1.5 gpm/5.7L/min. maximum flow rate.

NOT RECOMMENDED FOR USE ON 2-HOLE KITCHEN OR BAR SINKS.

PRODUCT FEATURES:

Pressure Compensating Aerator: Provides a constant water flow of 1.5 gpm throughout the pressure range.

Solid Brass Construction: Durable - Excellent in high use applications. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

Factory Installed Handles: Simplifies installation.

SUGGESTED SPECIFICATION:

4" centerset lavatory faucet shall be cast brass construction with all brass shank nuts and coupling nuts. Shall feature water-conserving 1.5 gpm/5.7L/min. pressure compensating aerator. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # ______.002.




HERITAGE

TWO-HANDLE CENTERSET LAVATORY FAUCET WITH GOOSENECK SPOUT & FACTORY INSTALLED HANDLES

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1 CSA B 125 NSF 61/Section 9 NSF 372



		Finish
Product		Polished Chrome
Number	Description	002
7400.172H	Centerset lavatory faucet. 1.5 gpm/5.7L/min pressure compensating aerator. Brass Wrist Blade Handles. Less drain.	
7400.172V	Centerset lavatory faucet. Vandal-resistant 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-resistant Brass Wrist Blade Handles. Less drain.	

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES

Other Aerators Available:		
Part Suffix	Description	
LV22	2.2 gpm (8.3 Lpm) Vandal-Resistant Non-Aerated Laminar Flow Outlet	
V22	2.2 gpm (8.3 Lpm) Vandal-Resistant Aerator	
A15LV	Anti-Microbial 1.5 gpm (5.7 Lpm) Vandal-Resistant Non-Aerated Laminar Flow Outlet	
LV15	1.5 gpm (5.7 Lpm) PCA Vandal-Resistant Non-Aerated Laminar Flow Outlet	
V15	.5 gpm (5.7 Lpm) PCA Vandal-Resistant Aerator	
LV10	1.0 gpm (3.8 Lpm) PCA Vandal-Resistant Non-Aerated Laminar Flow Outlet	
V10	1.0 gpm (3.8 Lpm) PCA Vandal-Resistant Aerator	
V05	0.5 gpm (1.9 Lpm) PCA Vandal-Resistant Non-Aerated Spray	
V035**	0.35 gpm (1.3 Lpm) PCA Vandal-Resistant Non-Aerated Spray	

^{*}PCA - Pressure Compensating

^{**}Meets Cal Green Code