
HERITAGE

TWO-HANDLE CENTERSET LAVATORY FAUCET

WITH GOOSENECK SPOUT



MODEL NUMBER:

☐ 7400.000 Centerset Lavatory

Rigid gooseneck spout. 1.5 gpm pressure compensating aerator. Less drain, Less pop-up hole. Less handles.


☐ 7401.000 Centerset Lavatory

Rigid gooseneck spout. 1.5 gpm pressure compensating aerator. Pop-up drain. Less handles.

☐ 7402.000 Centerset Lavatory

Rigid gooseneck spout. 1.5 gpm pressure compensating aerator. Grid strainer drain. Less handles.

Handles must be ordered separately.

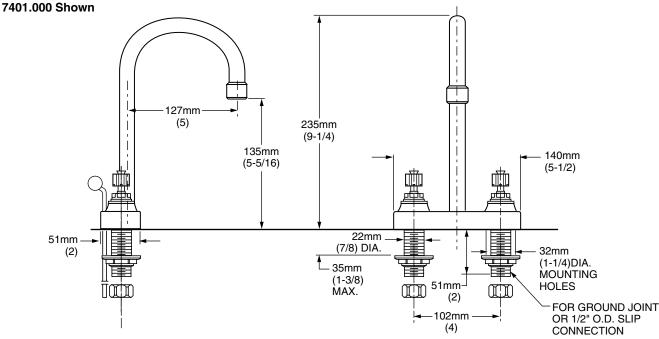

GENERAL DESCRIPTION:

Durable cast brass construction. Amarilis 1/4 turn washerless ceramic disc valve cartridges. Brass spout. One-half inch male inlet shanks with brass coupling nuts and shank nuts. All brass drain body with 1-1/4" (32mm) tailpiece. 1.5 gpm/5.7L/min. maximum flow rate.

PRODUCT FEATURES:

Pressure Compensating Aerator: Provides a constant water flow of 1.5 gpm throughout the pressure range.

Solid Brass Construction: Durable - Excellent in high use applications. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Low Lead: Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.

SUGGESTED SPECIFICATION:

4" centerset lavatory faucet shall be cast brass construction with all brass shank nuts and coupling nuts. Shall feature water-conserving 1.5 gpm/5.7L/min. pressure compensating aerator. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # 740 .000. ___ and handle kit # 0000.




HERITAGE

TWO-HANDLE CENTERSET LAVATORY FAUCET WITH GOOSENECK SPOUT

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1 CSA B 125 NSF 61/Section 9



		Finish
Product		Polished Chrome
Number	Description	002
7400.000	Centerset lavatory faucet. 1.5 gpm/5.7L/min pressure compensating aerator. Less drain. Less handles.	
7401.000	Centerset lavatory faucet. 1.5 gpm/5.7L/min pressure compensating aerator. Pop-up drain. Less handles.	
7402.000	Centerset lavatory faucet. 1.5 gpm/5.7L/min pressure compensating aerator. Grid strainer drain. Less handles.	

Handles must be ordered separately.

The above fittings will accept the following Amarilis-Series handles.



Ė

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

Other Aerators Available:

Part Suffix	Description 1.5 gpm Pressure Compensating Vandal-Resistant Aerator
V15 L15 LV15	1.5 gpm Pressure Compensating Vandal-Resistant Aerator 1.5 gpm Pressure Compensating Laminar Flow 1.5 gpm Pressure Compensating Vandal-Resistant Laminar Flow Outlet
V05	0.5 gpm Pressure Compensating Vandal-Resistant Spray