

7831.000 Shown

HERITAGE

TWO-HANDLE 6"-12" WIDESPREAD LAVATORY FAUCET WITH GOOSENECK SPOUT



MODEL NUMBER:


☐ 7830.000 6"-12" Widespread Lavatory

Rigid gooseneck spout. 1.5 gpm pressure compensating aerator. Less Drain. Less handles. Flexible hose connections.

7831.000 6"-12" Widespread Lavatory

Rigid gooseneck spout. 1.5 gpm pressure compensating aerator. With pop-up drain. Less handles. Flexible hose connections.

Handles must be ordered separately.

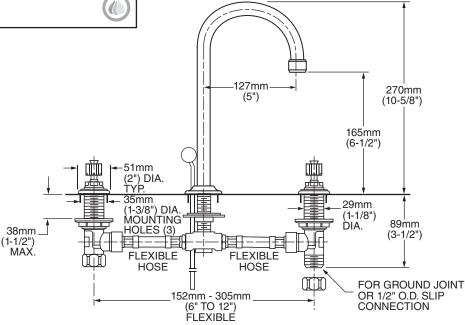

GENERAL DESCRIPTION:

Cast brass valve bodies with reinforced flexible hose connections for 6" to 12" (152mm to 305mm) installations. Amarilis 1/4 turn washerless ceramic disc valve cartridges. Brass spout. One-half inch male inlet shanks with brass coupling nuts and shank nuts. All brass drain body with 1-1/4" (32mm) tailpiece. 1.5 gpm/5.7L/min. maximum flow rate.

PRODUCT FEATURES:

Pressure Compensating Aerator: Provides a constant water flow of 1.5 gpm throughout the pressure range.

Brass Construction: Durable - Excellent in high use applications. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Lead Free: Faucet contains $\leq 0.25\%$ total lead content by weighted average.

SUGGESTED SPECIFICATION:

Two handle widespread lavatory faucet shall feature cast brass valve bodies with reinforced flexible hose connections for 6" to 12" installations. Shall feature water-conserving 1.5 gpm/5.7L/min. pressure compensating aerator. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # 783_.____ and handle kit # 0000.____.




HERITAGE

TWO-HANDLE 6"-12" WIDESPREAD LAVATORY FAUCET WITH GOOSENECK SPOUT

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1 CSA B 125 NSF 61/Section 9 NSF 372



		Finish
Product		Polished Chrome
Number	Description	002
7830.000	Lavatory Faucet. 1.5 gpm/5.7L/min pressure compensating aerator. Less drain. Less handles.	
7831.000	Lavatory Faucet. 1.5 gpm/5.7L/min pressure compensating aerator. Pop-up drain. Less handles.	

Handles must be ordered separately.

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES

The above fittings will accept the following Amarilis-Series handles.

~¶	4
Wrist Blade	Lever
372H 372V	342H 342V
E	E

Other Aerators Available:		
Part Suffix	Description	
LV22	2.2 gpm (8.3 Lpm) Vandal-Resistant Non-Aerated Laminar Flow Outlet	
V22	2.2 gpm (8.3 Lpm) Vandal-Resistant Aerator	
A15LV	Anti-Microbial 1.5 gpm (5.7 Lpm) Vandal-Resistant Non-Aerated Laminar Flow Outlet	
LV15	1.5 gpm (5.7 Lpm) PCA Vandal-Resistant Non-Aerated Laminar Flow Outlet	
V15	.5 gpm (5.7 Lpm) PCA Vandal-Resistant Aerator	
LV10	1.0 gpm (3.8 Lpm) PCA Vandal-Resistant Non-Aerated Laminar Flow Outlet	
V10	1.0 gpm (3.8 Lpm) PCA Vandal-Resistant Aerator	
V05	0.5 gpm (1.9 Lpm) PCA Vandal-Resistant Non-Aerated Spray	
V035**	0.35 gpm (1.3 Lpm) PCA Vandal-Resistant Non-Aerated Spray	

^{*}PCA - Pressure Compensating

^{**}Meets Cal Green Code