
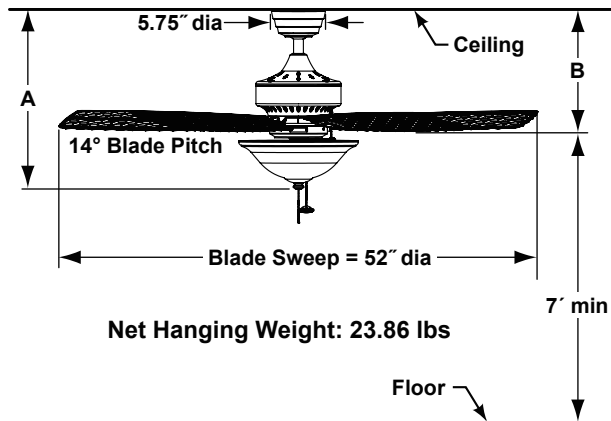


CANCUN™

FP8011OB Light Kit Ceiling Fan

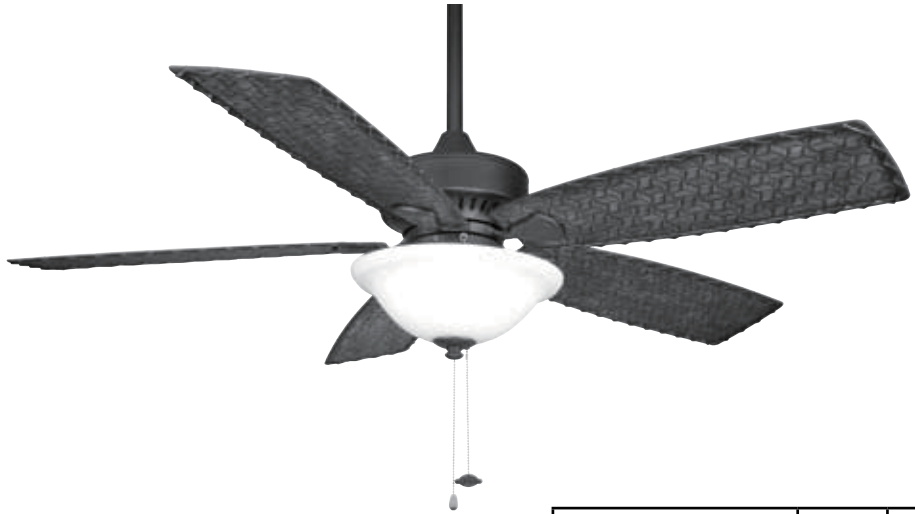

	A	B
Fan w/4.5" downrod	18.70"	11.98"
Fan w/12" downrod	26.20"	19.48"
Fan w/18" downrod	32.20"	25.48"
Fan w/24" downrod	38.20"	31.48"
Fan w/36" downrod	50.20"	43.48"
Fan w/48" downrod	62.20"	55.48"
Fan w/60" downrod	74.20"	67.48"
Fan w/72" downrod	86.20"	79.48"

Available Finish

OB Oil-Rubbed Bronze

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

172 x 20 motor is designed for optimal performance with this fan. 220 VAC, 50 Hz export version available.

BLADE SETS:

A set of five 22" damp location rated all-weather antique bamboo finish blades is included.

CONTROL OPTIONS:

CW1SW, CW2 and CWRL4 wall controls and CRL4WH and CRL8TS remote controls are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

A 3-bulb (60 watt max candelabra bulbs-included) downlight fixture with frosted glass is included with this fan assembly. Maximum downlight wattage not to exceed 180 watts.

DOWNROD OPTIONS:

The Cancun™ fan comes with a 1" Dia. x 4.5" downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Cancun™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Optional close-to-ceiling kit is available as well—sold separately. Call your local dealer for more information.

LOCATION USE:

Fan is rated for dry and damp location usage.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	156	5848	85	0.58	69
Med	94	3691	137	0.37	27
Low	48	2111	211	0.23	10