

Style That Works Better

& BARRIER FREE

WHEELCHAIR USERS LAVATORY VITREOUS CHINA

WHEELCHAIR USERS LAVATORY

- Vitreous china
- Wall mount sink
- · Front overflow
- For concealed arms support (by others)
- Faucet ledge (faucet not included)

Faucet Holes on 102mm (4") centers

- ☐ 9141.011 Faucet holes on 102mm (4") centers (Illustrated)
- 9141.029 Faucet holes on 102mm (4") centers
 Extra right-hand hole
- ☐ 9141.035 Faucet holes on 102mm (4") centers
 - Extra left-hand hole
- ☐ 9141.911 Faucet holes on 102mm (4") centers
 - Less overflow

Faucet Holes on 267mm (10-1/2") centers

- ☐ 9140.013 Faucet holes on 267mm (10-1/2") centers
- ☐ 9140.021 Faucet holes on 267mm (10-1/2") centers
 - Extra right-hand hole
- ☐ 9140.039 Faucet holes on 267mm (10-1/2") centers
 - Extra left-hand hole
- ☐ 9140.913 Faucet holes on 267mm (10-1/2") centers
 - Less overflow

Faucet Holes center hole only

- **□** 9140.047 Center hole only
- **□** 9140.947 Center hole only
 - Less overflow

Nominal Dimensions:

508 x 686mm (20" x 27")

Bowl Sizes:

14" (356mm) wide 14-3/4" (375mm) front to back 4-3/4" (121mm) deep

Compliance Certifications - Meets or Exceeds the Following Specifications:

ASME A112.19.2 for Vitreous China Fixtures



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

To Be Specified:

- ☐ Color: ☐ White ☐ Bone ☐ Silver
- ☐ Faucet*:
- □ Faucet Finish:
- ☐ Supplies with Stop:
- ☐ 1-1/4" Trap:
- Nipple:
- ☐ Concealed Arms Support (by others):
- ☐ Offset Grid Drain Assembly: 7723.018

^{*} See faucet section for additional models available



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDE-LINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Top of front rim mounted 864mm (34") from finished floor.




Style That Works Better


WHEELCHAIR USERS LAVATORY

/ITREOUS CHINA


BARRIER FREE

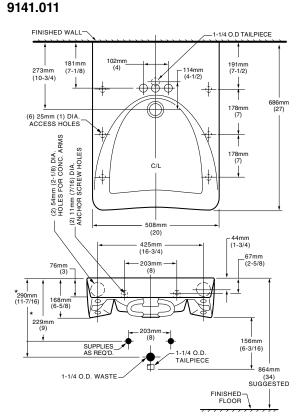


9141.029

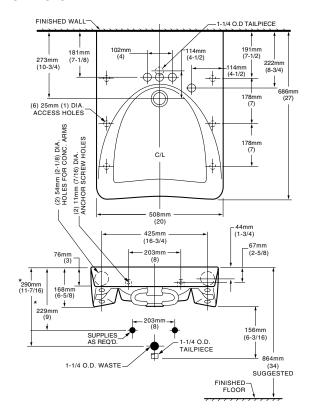

9141.035

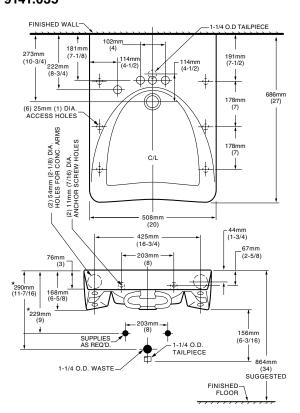

9140.013

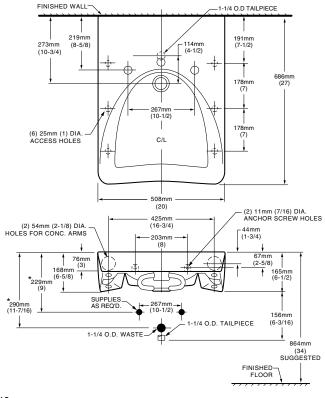




Style That Works Better


WHEELCHAIR USERS LAVATORY VITREOUS CHINA

BARRIER FREE

9140.021

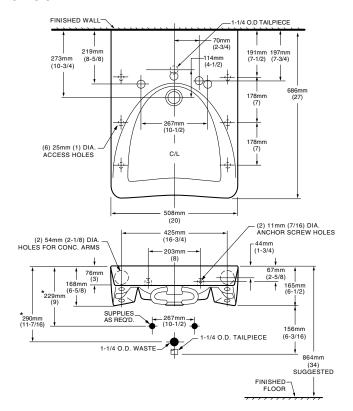

9140.039

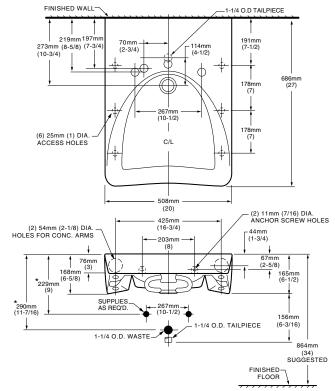

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDE-LINES AND ANSI A117.1 ACCESSIBLE AND USABLE **BUILDINGS AND FACILITIES - CHECK LOCAL CODES.**

Top of front rim mounted 864mm (34") from finished floor.

NOTES: \star DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. CONCEALED ARM SUPPORT AS REQUIRED TO BE FURNISHED BY OTHERS.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY. PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.