American Standard

BARRIER FREE

MURRO™ UNIVERSAL DESIGN WALL-HUNG LAVATORY VITREOUS CHINA

MURRO™ UNIVERSAL DESIGN WALL-HUNG LAVATORY

- Vitreous china
- Rear overflow
- · Recessed self-draining deck
- · For concealed arm or wall support
- · Shown with optional vitreous china shroud/ knee contact guard 0059.020 available
- **0954.000** Faucet holes on 102mm (4") Ctrs (Illustrated)
- **0954.023** Faucet holes on 102mm (4") Ctrs • Extra right-hand hole
- **0954.021** Faucet holes on 102mm (4") Ctrs • Extra left-hand hole
- 0958.000 Faucet holes on 203mm (8") Ctrs
- 0955.000 Center hole only
- 0955.023 Center hole Extra right-hand hole
- **0955.021** Center hole • Extra left-hand hole

Nominal Dimensions:

559mm (22") deep, 540mm (21-1/4") wide

Bowl sizes:

394mm (15-1/2") wide, 343mm (13-1/2") front to back, 127mm (5") deep

0059.020 Shroud/Knee Contact Guard (Vitreous China)(Must be specified separately)

Compliance Certifications -

Meets or Exceeds the Following Specifications: ASME A112.19.2 for Vitreous China Fixtures

To Be Specified:


- □ Color: □ White □ Bone □ Silver
- Optional Vitreous China Shroud/Knee
- Contact guard: 0059.020
- □ Faucet*:
- □ Faucet Finish:
- □ Supplies:
- □ 1-1/4" Trap:
- Nipple:

See faucet section for additional models available

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDE-LINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES. Top of front rim mounted 864mm (34") from finished floor.

For Universal Design Options, top of rim may be mounted at 813mm (32") from finished floor to meet ADA and ANSI A117.1 requirements. Check local codes.



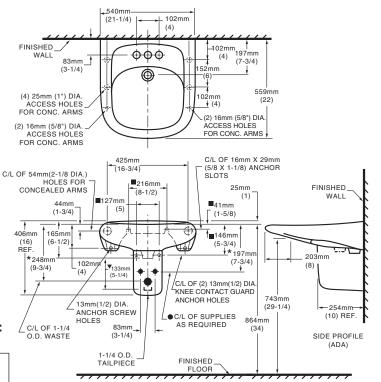

SEE REVERSE FOR ADDITIONAL ROUGHING-IN DIMENSIONS

NOTES:

LOOSE KEY ANGLE STOPS, LESS WALL ESCUTCHEONS. SUPPLIES REQUIRED

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE

SUGGESTED. ▼ DRAIN TAILPIECE MUST BE CUT TO 67mm (2-5/8) FOR PROPER INSTALLATION.


SHROUD/KNEE CONTACT GUARD 0059.020 NOT INCLUDED AND MUST BE ORDERED SEPARATELY. SUITABLE FOR REINFORCEMENT ONLY, ACTUAL DIMENSIONS MUST

BE TAKEN FROM FIXTURE. FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY. PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS. INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

American Standard

MURROTM UNIVERSAL DESIGN WALL-HUNG LAVATORY VITREOUS CHINA

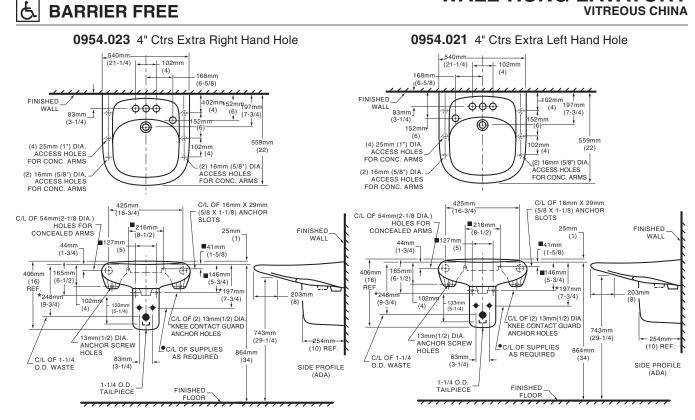

0955.023 Center Hole With Extra Right Hand Hole

540mn

(21 - 1/4)

←___540mm_____ (21-1/4) ↓ ↓ (6-5/8)

0955.021 Center Hole With Extra Left Hand Hole

