# Motion Activated **DECORATIVE LIGHTING**

Heath Zenith

SPECIFICATION SHEET

Model # **SL-4132** 



Available Colors: Black (SL-4132-BK) and Matte White (SL-4132-MW)

## **SPECIFICATIONS**

 Power Supply
 Dimensions

 • 120VAC, 60 Hz
 W: 4.5"

 Wires
 D: 6.75"

 • AWG#18 (UL Recognized)
 H: 9.5"

#### **Max Load**

• Up to 60 Watts Incandescent, Medium Base

#### **Operating Temperature**

• -22° F to +120° F

#### **Sensor Capacity**

• Up to 500 Watts (3.0 A) Maximum Incandescent

#### Range

• Detects motion up to 30 Feet

#### **Operating Modes**

• TEST, AUTO, MANUAL

#### **ON-Timer**

• TEST, 1, 5 or 10 Minutes



#### **Features**

- Clear glass
- · Metal, weather resistant finish
- 150° motion detection angle
- Selectable on-time from 1, 5 or 10 minutes
- Adjustable sensitivity
- 2 Year Warranty

## **Applications**

PorchGarageBreezeway

### **Operating Modes**

TEST: Overrides the photocell to allow the light to be setup during daylight hours.

AUTO: Lights automatically come on when motion is detected.

MANUAL: Lights stay on full bright until dawn. Photocell then resets light to AUTO mode.

#### **ON-Timer**

Turns lights on full bright when motion is detected. There are 4 preset selections for the amount of time the lights stay on: Test (5 seconds), 1, 5 or 10 minutes.

#### **Adjustable Sensitivity**


You can adjust the motion sensor's sensitivity to movement of heat.





JOB #	
JOB NAME	



# **USAGE & COVERAGE**

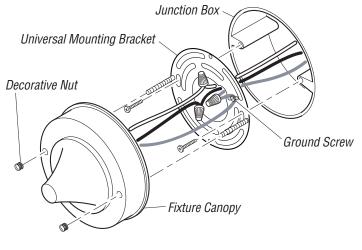





COVERAGE ANGLE


(TOP VIEW)


ROTATING SENSOR HEAD TO CHANGE COVERAGE AREA

# WIRING




WARNING: Turn power off at the circuit breaker before wiring.






**ONE MOTION SENSING LIGHT** 

TWO MOTION SENSING LIGHTS (WORKING INDEPENDENTLY)





WIRING MOTION SENSING LIGHT TO CONTROL STANDARD FIXTURE

WIRING MOTION SENSING LIGHT TO CONTROL ANOTHER MOTION SENSING LIGHT

www.heath-zenith.com