American Standard

Style That Works Better

LUCIA™ WALL-HUNG LAVATORY

- Vitreous china
- 2" high Integral back splash
- For concealed arm installation
- Integral side shelves
- Shown with optional vitreous china shroud/ knee contact guard 0059.020 available
- □ 0145.001 Center hole only
- □ 0145.501 Center hole only with sealed overflow
- □ 0145.004 Faucet holes on 4" (102mm) centers
- □ 0145.504 Faucet holes on 4" (102mm) centers with sealed overflow
- **0145.008** Faucet holes on 8" (203mm) centers
- O145.508 Faucet holes on 8" (203mm) centers with sealed overflow
- O059.020 Shroud/Knee Contact Guard (Vitreous China)

Nominal Dimensions:

35-1/2" x 20-1/2" (900 x 520mm)

Bowl sizes:

518mm (20-3/8") wide 330mm (13") front to back 140mm (5-1/2") deep

Note: Must be installed with concealed arm carrier. Please allow proper wall depth clearance for concealed arm carrier support.

Compliance Certifications -Meets or Exceeds the Following Specifications:

 ASME A112.19.2-2008 / CSA B45.1-08 for Vitreous China Fixtures

То	В	е	Sp	eci	fi	e	d	:	
_	-			_		-			

- Color: White
- Optional Vitreous China Shroud/Knee Contact guard: 0059.020
- □ Faucet*:
- Given Faucet Finish:
- Supplies:
- □ 1-1/4" Trap:
- Nipple:

* See faucet section for additional models available



Shown With Optional Shroud/Knee Contact Guard

SEE REVERSE FOR ROUGHING-IN DIMENSIONS




MEETS THE AMERICANS WITH DISABILITIES ACT GUIDE-LINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES. Top of front rim mounted 864mm (34") from finished floor.

LUCIA[™] WALL-HUNG LAVATORY VITREOUS CHINA

American Standard

Style That Works Better **BARRIER FREE**

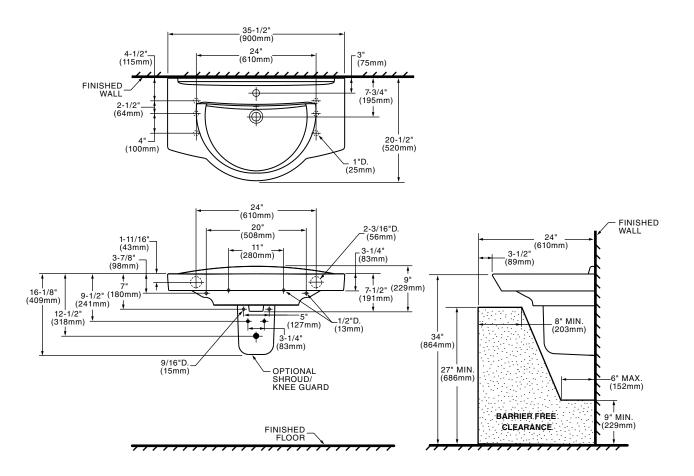

NOTES:

ALLOW PROPER WALL DEPTH CLEARANCE FOR CONCEALED ARM CARRIER SUPPORT. MUST BE INSTALLED WITH CONCEALED ARM CARRIER. LOOSE KEY ANGLE STOPS, LESS WALL ESCUTCHEONS. SUPPLIES REQUIRED. DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. SUITABLE FOR REINFORCEMENT ONLY, ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE. FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY. PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS. INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDE-LINES AND ANSI A117.1 ACCESSIBLE AND USABLE **BUILDINGS AND FACILITIES - CHECK LOCAL CODES.**

Top of front rim mounted 864mm (34") from finished floor.