



Family: Buckley | Item No. 1371 BK/OB



**Drawing 1 - Fixture Mounting**

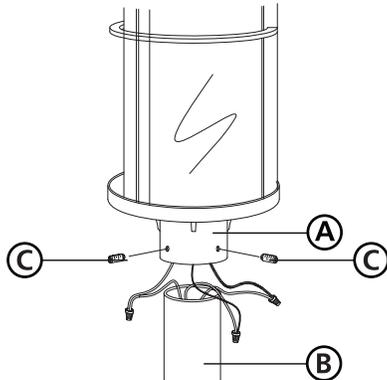

**Drawing 2 - Lamping Fixture**

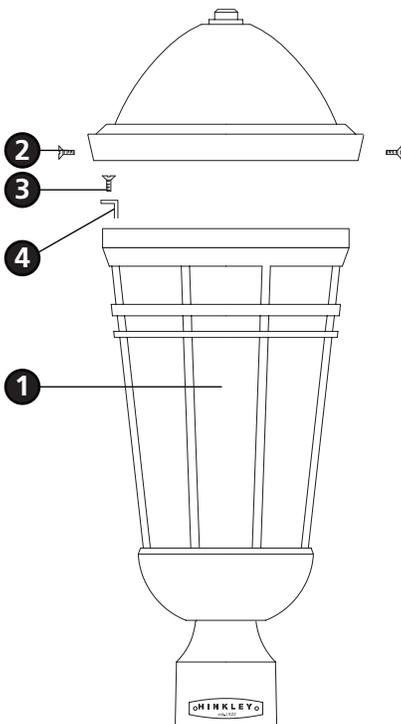

## ▼ start here

**1**

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first making all necessary electrical connections, mounting the fixture to pre-installed post, unpacking the fixture glass and then lamping fixture.**

**2**

1. Fixture is mounted using 3 - 1/4-20 set screws.
2. Make all necessary electrical connections following wiring instructions below.

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

**3**

Make electrical connections from supply wire to fixture lead wires. Refer to instruction sheet **(I.S. 18)** and follow all instructions to make all necessary wiring connections. Then refer back to this sheet to continue installation of this fixture.

**4**

1. After wiring connections are complete, slip post fitter **(A)** over top of pre-installed post **(B)** making sure all wire connections are tucked inside the pole - see **Drawing 1**.
2. When fixture is slipped over pole make sure no wires are being pinched between the top edge of the pole and the inside of the post fitter.
3. Thread the 3 set screws **(C)** into pre-tapped holes in post fitter.
4. Tighten screw **(C)** to secure fixture to post.

**5**

- Unpacking fixture: In order to make sure the glass does not break during shipping, additional packing material has been supplied between the glass and the cage. It will be necessary to remove the glass clips **(4)** and glass, in order to remove this packing material.
1. To unpack glass and lamp fixture or to replace glass, remove the Phillips head screw **(2)** from the side of the fixture, making sure to hold cage assembly **(1)** - see **Drawing 2**.
  2. Set cage assembly **(1)** aside and remove screw **(3)** and glass clip **(5)** from cage assembly **(1)**.
  3. Remove glass followed by packing material inside of cage and then replace glass into cage assembly **(1)**.
  4. Fixture can now be lamped accordingly.
  5. To reassemble fixture follow steps 1-2 in reverse order.

Note: Maximum wattage for 1371 fixture is 100 watts per bulb.

12.10.08