

TIMES SQUARE™

PRESSURE BALANCE BATH/SHOWER FITTING

WITH WATER-SAVING SHOWERHEAD



T184.508 Bath/Shower Trim Shown

GENERAL DESCRIPTION:

SHOWERHEAD

Water saving 2-function showerhead offers 20% water savings at maximum 2.0 gpm/7.6 L/min. flow rate.

WALL TUB SPOUT

Metal slip-on diverter spout.

WALL VALVE TRIM


Available with metal lever handle. Metal wall escutcheon.

MODEL NUMBER:

TRIM KITS:

- ☐ T184.508 Times Square BATH/SHOWER Trim Kit Lever Handle. FloWise® Showerhead. LESS Valve Body.
- ☐ T184.507 Times Square SHOWER ONLY Trim Kit Lever Handle. FloWise Showerhead. LESS Valve Body.

For use with R110 Series Pressure Balance Valves. See reverse side for available Rough Valves.

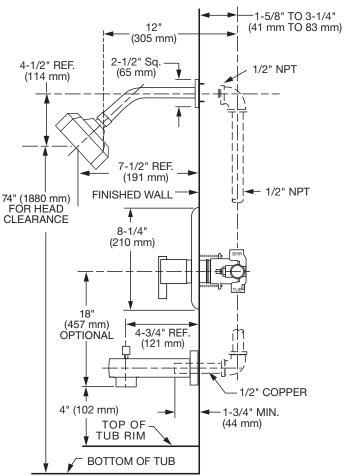

SUGGESTED SPECIFICATION:

Bath/shower fitting shall feature water saving 2-function showerhead with Max. 2.0 gpm/7.6 L/min. flow rate. Fitting shall be: American Standard - Trim Kit Model # T184.50_.___ and Valve Body Model # R11_.



TIMES SQUARE™


PRESSURE BALANCE BATH/SHOWER FITTING WITH WATER-SAVING SHOWERHEAD

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A 117.1 ASSE 1016 ASME A112.18.1 CSA B 125.1





*To modify a product, add suffix after the 4th digit (ex. T064<u>ITP</u>502.002)

FLOW RATE* Spout Shower 8 6 20 40 60 80 100 INLET PRESSURE (PSI) *Flow rates shown are for mixed hot and cold.

		* TRIM & ROUGH MUST BE ORDERED SEPARATELY.	Finish Options	
KITS *	Product		Polished Chrome	PVD Satin Nickel
<u>×</u>	Number	Description	002	295
	T184.508	Bath/Shower Trim Kit. Lever Handle. FloWise Showerhead. LESS Valve Body.		
	T184.507	Shower Only Trim Kit. Lever Handle. FloWise Showerhead. LESS Valve Body.		

	Product	
	Number	Description
	R111	Rough Valve Body less trim. Universal inlets/outlets.
SE	R111SS	Rough Valve Body less trim. Universal inlets/outlets with Screwdriver Stops.
<u>=</u>	R110	Rough Valve Body less trim. Direct sweat inlets/outlets.
BO	R110SS	Rough Valve Body less trim. Direct sweat inlets/outlets with Screwdriver Stops.
LVE	R115	Rough Valve Body less trim. Female Thread inlets/outlets.
	R115SS	Rough Valve Body less trim. Female Thread inlets/outlets with Screwdriver Stops.
*	R117	Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807).
OUGH	R117SS	Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807) with Screwdriver Stops.
Ö	R118	Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960).
Œ	R118SS	Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960) with Screwdriver Stops.
	R119	Rough Valve Body less trim. CPVC inlets/universal outlets.
	R119SS	Rough Valve Body less trim. CPVC inlets/universal outlets with Screwdriver Stops.

Meets the American Disabilities Act Guidelines and **ANSI A117.1**Requirements for the physically challenged.

© 2015 AS America Inc. B40 Revised 5/15