


12V LED/INCANDESCENT PATH & SPREAD

ADJUSTABLE COPPER

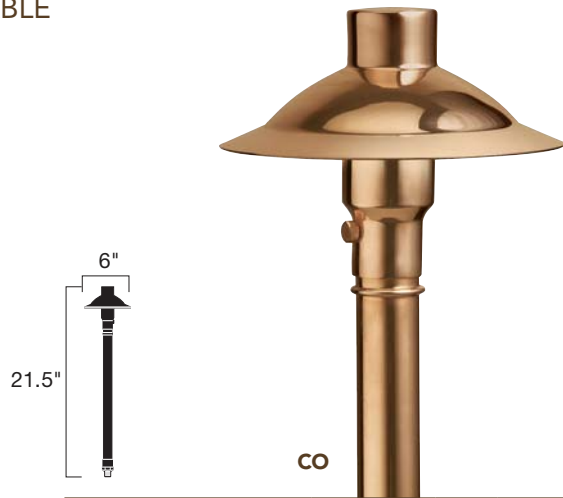

CO

15350 CO

ZEN GARDEN



OZ

15391 OZ

Ordering Guide & Finish	15350 CO	15391 OZ		
Housing	Copper	Brass with textured amber seedy linen glass		
Lamp Base	12V S8 wedge base socket	12V T5 wedge base socket		
Supplied Lamp	24.4-W(VA) 3156K (15598 CLR) Krypton light source Power usage at 12V AC input VA MAX: 24.4-W(VA)	11.6-W(VA) 912X (17023) Xenon light source Power usage at 12V AC input VA MAX: 16.25-W(VA)		
Incandescent Lamp Options	18.5-W 3155K (15599 CLR)	16.25-W(VA) 921X (17025) 6.5-W(VA) 918X (17022) 4-W(VA) 901X (17021)		
LED Lamp Options	N/A	2W (18039-18041) see page 137. Compares up to 16W Xenon.		
Wiring	21" of usable #18-2, SPT-1-W leads. Cable connectors supplied.	30" of usable #18-2, SPT-1-W leads. Cable connectors supplied.		
Mounting Access. (Included)	8" In-ground slotted stake	8" In-ground slotted stake		
Optional Accessories	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket	15601 – Surface Mounting Flange 15607 – Surface Mounting Bracket		
Integrated LED Options	15850 on page 36	U.S. Patent Pending		
Notes	Copper will naturally patina over time. Adjustable head.	Brass will develop natural patina over time		
Photometric with Supplied Lamp	Distance from Light	1' 2' 3' 4' 5' 6' 7' 8' 9'	Distance from Light	1' 2' 3' 4' 5' 6' 7' 8' 9'
	Bottom	6.4 5.0 2.3 1.0 .4 .1 - - -	Foot Candles	3.2 1.2 .26 - - - - -
	Middle	6.3 2.7 2.0 .9 .4 .1 - - -		
	Top	6.0 2.4 .8 .3 .1 - - -		