


WM1927
Catalog:

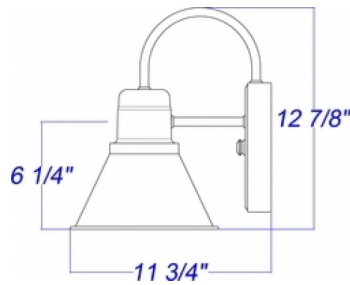

	WPL (Fluorescent)
Max Wattages	42WPLW

**HID refers to both Metal Halide(MH) and High Pressure Sodium(HPS).
Please specify preferences.

Caution! Glass enclosure reduces maximum wattage.
Max Wattages are based on open lamp

Description:

Mini Wall Mount w/ 7" Lampshade
Mounting hardware not included with arm due to application variations.

Max Wattages are based on open lamp
Some wall mounts may not accommodate all luminaires due to size/weight

Specification:

RLM shades manufactured from 1100 Aluminum Alloy typically .08 - .125 thickness.

- White paint standard inside all painted fixtures. Fixtures, arms and post mounts are U.L. wet listed when installed according to manufacturers instructions. Design and construction may change at factory's discretion. Screw hardware may not match finish, but are made of stainless steel.
- All fixtures come standard with 96" of lead wire. Additional lead wire (LDW).
- For Color Selections see color page. ANP will do its best to match your custom color. Consult factory for prices.
- When ordering Raw Copper finish, please note that some accessories/components such as finials, decorative balls, and spacer tubes are painted copper and are not raw copper. Cast back plates included are solid copper. All hubs are painted copper.
- Some accessories may extend below fixture line or be out of proportion. When using a combination of accessories, contact factory for compatibility.
- Grills and Vapor Tight guards are available in painted finishes only (standard & premium).
- Steel Shades available, consult factory.

Paint:

Standard Powder Coating Process
A polyester powder coat is used for superior gloss and color retention. State of the art 20 PSI pressure power wash at 140°F; incorporates five step iron phosphate process with sealer and DI water to cleanse and pre-treat the metal surface for maximum paint adhesion. Electrostatically applied ranging from texture to smooth glossy polyester powder topcoat and baked at 430°F; for maximum hardness and exterior durability.

Marine Grade Paint:

For objects exposed to extreme conditions as is found in coastal regions or industrial atmospheres we offer, at an additional charge, a highly weather and UV resistant powder coating that withstands up to 3000 hours of continuous salt spray and comes with a 5 year warranty. Consult Factory for additional paint cost and availability.

Available Colors							
Color plates below represent available colors for this product. <input type="checkbox"/> If photograph not available in selected color, color back plate will be shown							
40	41	42	43	44	45	46	47
48	49	50	51	52	53	55	56
57	58	59	60	61	62	63	64
65	66	67	68	69	70	71	72
76	80	99					



WM1927
Catalog:

BALLAST MOUNTING SOURCES - CORDS	
Fluorescent Please specify 26, 32 or 42 WPL. Ballast included	
RBHC Fluorescent Ballast Canopy with 8' Black Cord (For indoor use)	RWHC Fluorescent Ballast Canopy with 8' White Cord (For indoor use)
Metal Halide Please specify 50, 70, 100, 150, or 175 Watt MH. Ballast included	
HIDRC-BLC Metal Halide Ballast Canopy with 8' Black Cord (For indoor use)	HIDRC-WHC Metal Halide Ballast Canopy with 8' White Cord (For indoor use)

BALLAST MOUNTING SOURCES - ARMS		
Fluorescent Please specify 26, 32 or 42WPL. Ballast included	Metal Halide Please specify 50, 70, 100, 150, or 175 Watt MH. Ballast included	
RTC Fluorescent Ballast Canopy (Indoor/Outdoor Use)	HIDRC Metal Halide Ballast Canopy (for indoor/outdoor use)	RWT Remote Weathertight Box for Metal Halide (Indoor/Outdoor Use)
Metal Halide Please specify 50, 70, 100, 150, or 175 Watt MH. Ballast included		
RWTBC Remote Weathertight Box for Metal Halide with Cast Back Plate (Indoor/Outdoor Use)	RWTCBC Remote Weathertight Box for Metal Halide with Cast Back Plate and Cover (Indoor/Outdoor Use)	MHRI Metal Halide Remote Indoor Ballast (Indoor Use Only)

Ballast Information:

Ballast housing is based on mounting options.

If required voltage cannot be determined, only 120 volts lead will be pulled out of the fixture. All other line voltage wires will be left inside the fixture in order to prevent damage to the ballast due to incorrect power connections

Fluorescent Notes:

Multi-tap 120 volts and 277 volts provided
Minimum Starting Temperature: -18°F/5°C; Celsius
UL Listed and CSA Certified
Fluorescent dimming ballast available. Consult Factory

Metal Halide Ballast Notes:

Input Voltage 120/277
Minimum Starting Temperature: -20°F/5°C; Celsius
Maximum Ballast to Lamp Distance
50 watt: 5 ft. 70 watt: 15 ft. 100watt: 20 ft. 150 watt: 10 ft.
Ballast to lamp distance is only limited by the size of the conductor between the ballast and the lamp
To increase ballast to lamp distance long range ignitor available
Ballast and housing is not included in the shade pricing.
See mounting sources for ballast options, housing and available wattages

BALLAST MOUNTING SOURCES - STEMS		
Fluorescent Please specify 26, 32 or 42WPL. Ballast included		
RLC Ballast Canopy w/ Swivel (for indoor/outdoor use)	RTC (For indoor/outdoor use)	
Metal Halide Please specify 50, 70, 100, 150, or 175 Watt MH. Ballast included		
RWTBC Remote Weathertight Box for Metal Halide with Cast Back Plate (Indoor/Outdoor Use)	RWTCBC Remote Weathertight Box for Metal Halide with Cast Back Plate and Cover (Indoor/Outdoor Use)	MHRI Metal Halide Remote Indoor Ballast (Indoor Use Only)

ANSI CODES FOR METAL HALIDE BALLASTS

- MH50: ANSI Code M110/M148
- MH70: ANSI Code M98/M143
- MH100: ANSI Code M90/M140
- MH150: ANSI Code M102/M142
- MH175: ANSI Code M57/H39

WM1927
Catalog:

Quick Reference Mounting Options (For Incandensent Lamping)		
STEM MOUNTS		
BLC		WHC
ARM MOUNTS		
E1		E13
E2		E15
E3		E16
E4		E17
E5		E18
E6		E18LC
E7		E19
E8		E20
E9		E21
E10		E22
E11		E23
E12		E24
MOUNTS		
WM35		WM40
WM45		WM55
WM558C		WM75
WM85		WM85BP
WM858C		WM858CBP
POST MOUNTS		
PM10		PM20
PM30		PM40
PM50		

Accessories			
Add Glass Only to Shade		Add Glass with Guard	
	100GLCL*		100GLCLGUP*
	100GLPR*		1100GLPRGUP*
	100GLFR*		100GLFRGUP
	100GLJJ*		100GLCLGUPC
			100GLFRGUPC
			100GLPRGUPC*
	100GLBG*		200GLCLGUP**
			200GLPRGUP**
			200GLFRGUP**
	200GLCL**		
	200GLPR**		
	200GLFR**		
	AC*		
Add Guard Only, No Glass			
	100GLGUP		
	100GLGUP		
	100GLGUP		