


48773 / 01 Flush Bolt



Tools Needed

Herramientas necesarias
Outils nécessaires

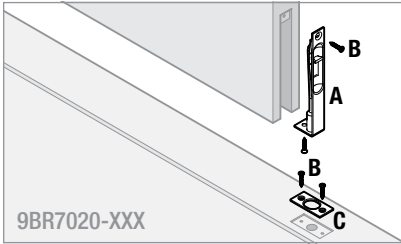

3/32"
2 mm





5/8"
16 mm



1

Remove material.
Retire el material.
Retirez le matériel.

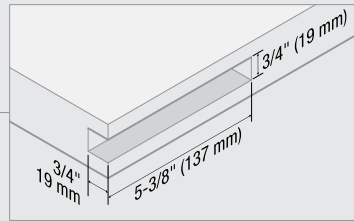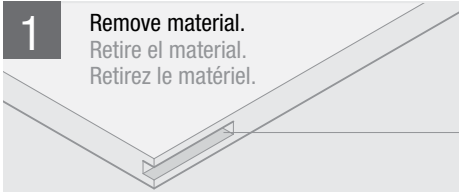


2

Remove material until bolt is flush with door.




Retire el material hasta que el perno se encuentre nivelado con la puerta.

Retirez le matériel jusqu'à ce que le boulon soit au même niveau que la porte.

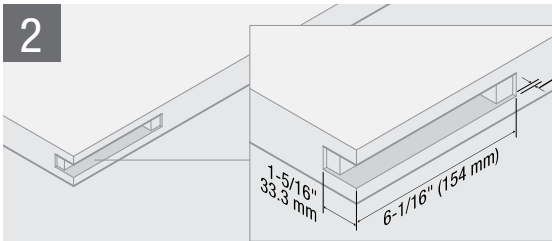

3

Mark holes.
Marque los orificios.
Marquez les trous.





4


x2
3/32"
2 mm

1/2"
12.7 mm
deep

profundidad
profondeur

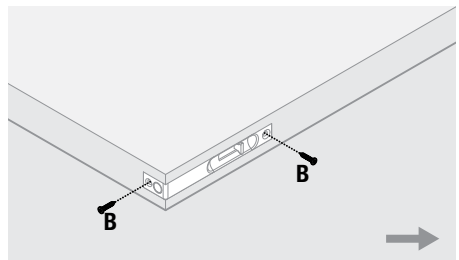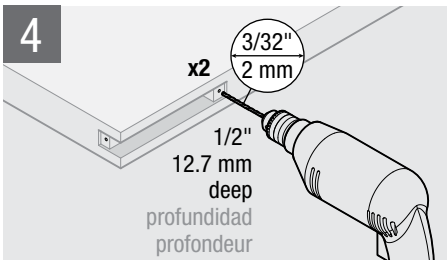


48773 / 01 Flush Bolt

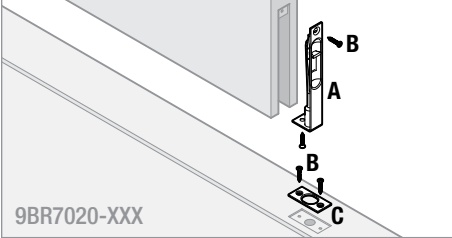



9BR7020-XXX

Tools Needed
Herramientas necesarias
Outils nécessaires

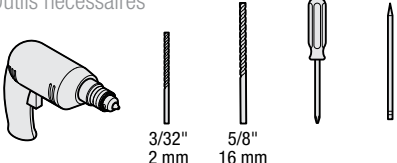

3/32"
2 mm 5/8"
16 mm

5 **Mark edge and center of door.**
Marque el costado y el centro de la puerta.
Marquez le bord ainsi que le centre de la porte.


5/8"
11 mm

1-1/4"
32 mm
deep

7/16" (11 mm)
from edge of door
desde el borde de la puerta
à partir du bord de la porte


profundidad • profondeur

6

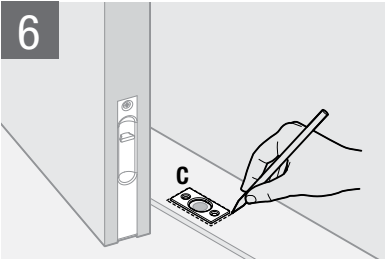



C

Remove material until strike (C) is flush.
Retire el material hasta que la cerradura (C) se encuentre nivelada.
Retirez le matériel jusqu'à ce que la gâche (C) soit au même niveau.



7

Mark holes.
Marque los orificios.
Marquez les trous.

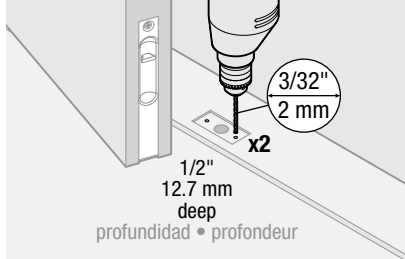



3/32"
2 mm


1/2"
12.7 mm
deep

profundidad • profondeur

8

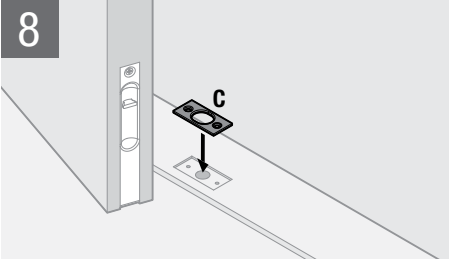

C

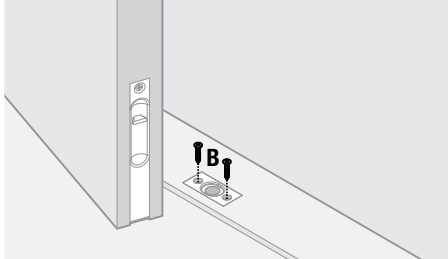

B