


IMPORTANT SAFETY INFORMATION. READ AND FOLLOW ALL SAFETY INSTRUCTIONS. Follow label information and instructions concerning Wet or Damp Locations, installation near combustible materials, insulation, building materials, and proper lamping. Do not install in areas subject to combustible vapors or gases. Before wiring to power supply and during servicing or relamping, turn off power at fuse or circuit breaker. **All servicing or relamping must be performed by qualified service personnel. Product must be grounded to avoid potential electric shock or other potential hazard. Product must be mounted in locations and at heights and in a manner consistent with its intended use, and in compliance with the National Electrical Code and local codes.** The use of accessory equipment not recommended by the manufacturer or installed contrary to instructions may cause an unsafe condition. Do not block light emanating from product in whole or part, as this may cause an unsafe condition. Do not allow items such as drapes, curtains, screens or the like to come into contact with the product or to block light from the product, as this may cause an unsafe condition.

-
- WARNING** - Follow the Instruction carefully to assure full compliance with local, state, and NEC requirements. If there are any questions, contact a Qualified Electrical Contractor.
- WARNING** - Risk of fire or electrical shock. Install this kit only in Recessed Cans matching the dimensions in Table A below.
- WARNING** - To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- WARNING** - Risk of fire. Consult a Qualified Electrician to ensure correct branch circuit conductor.
- NOTE** - This product is designed to operate with most standard incandescent or low voltage electronic dimmer switches. Results may vary. For recommended dimmers, consult product spec sheet or go to <http://www.prescolite.com> or call Technical Support 1-888-PRS-4TEC.
- NOTE** - SUITABLE FOR WET LOCATIONS IN COVERED CEILING
- WARNING** - This product contains chemicals known to the State of California to cause cancer, birth defects, and/or other reproductive harm. Thoroughly wash hands after installing, handling, cleaning, or otherwise touching this product.
- NOTE** - Always install within ambient temperatures specified on the product specification sheet. 3 year warranty in IC applications, 5 year warranty available in Non-IC applications with product registration. See www.prescolite.com for details.
-

INSTALLATION INSTRUCTIONS

LB6LEDA SERIES

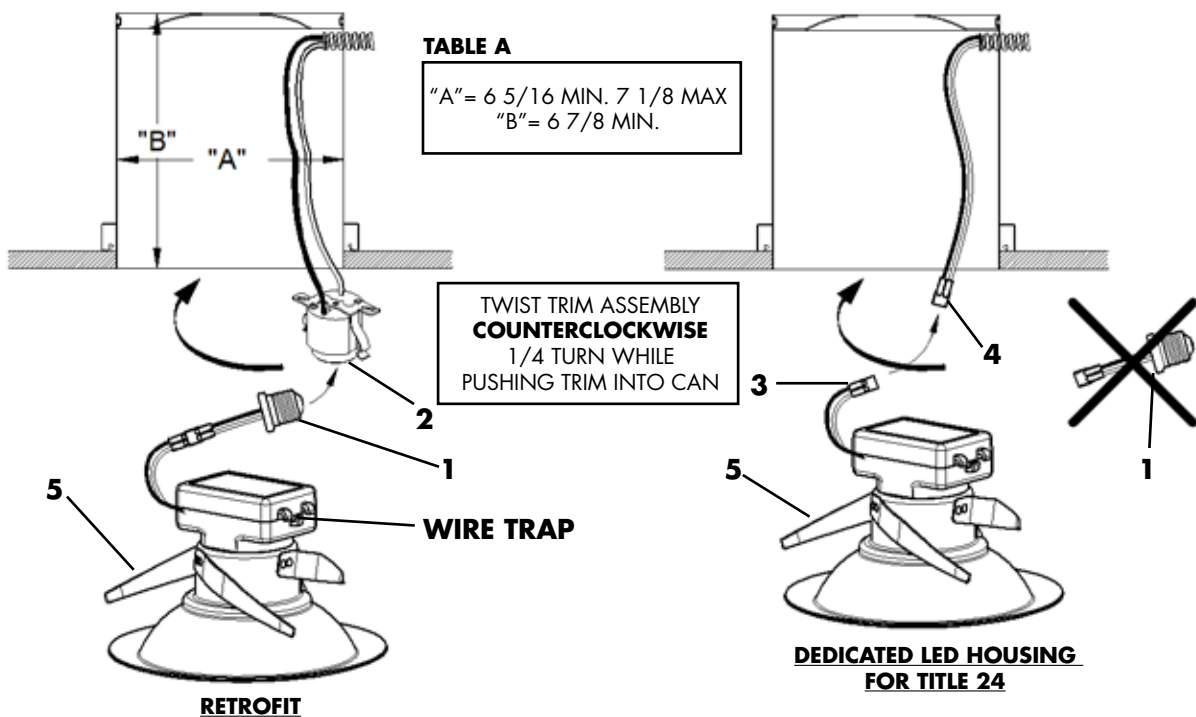

Fits into Prescolite 6" recessed cans including: DBX, RMNICD, IBXHW, FT6. Fits into most competitive recessed cans with "A" and "B" dimensions above including: Halo H7ICAT, H7RICAT; Juno IC22; Lithonia L7X; Capri CR1, CRR1; Progress P87-AT, P87-ATQC, P187-TG, P821-FB; Nora NHIC-17QAT, NHRIC-17QNBAT; Sea Gull 1128. See www.prescolite.com for more details.

IMPORTANT! Prior to retrofit installation, recessed can must be properly installed and flush with the ceiling. It may be necessary to detach the socket from a mounting bracket or spring. Remove and discard bracket to allow adequate clearance.

1. Connect Trim to Power

For retrofit: Screw socket adapter (1) into socket (2) as shown. Or to hard-wire: Cut medium base screw shell socket wires near socket, discard socket. Cut and remove screw shell adapter from trim, discard adapter. Strip wires and connect (Blk-Blk, Wht-Wht) with UL listed connectors.

For new construction with dedicated LED housing: Remove socket adapter assy (1) and discard. Connect trim connector (3) directly to mating LED housing connector (4) as shown.

2. Insert Trim into Recessed Can

Guide socket and wiring toward the can opening. Push trim up into recessed can, while twisting trim **counterclockwise** 1/4 turn, firmly engaging the spring clips (5) until flush with ceiling. **NOTE:** Loose wires can be placed in wire trap to avoid interference or pinching of wiring.

3. To remove trim assembly, twist trim assembly **counterclockwise** 1/4 turn while pulling down.

KEEP THESE INSTRUCTIONS