


INSTRUCTIONS FOR OPERATING LIFT

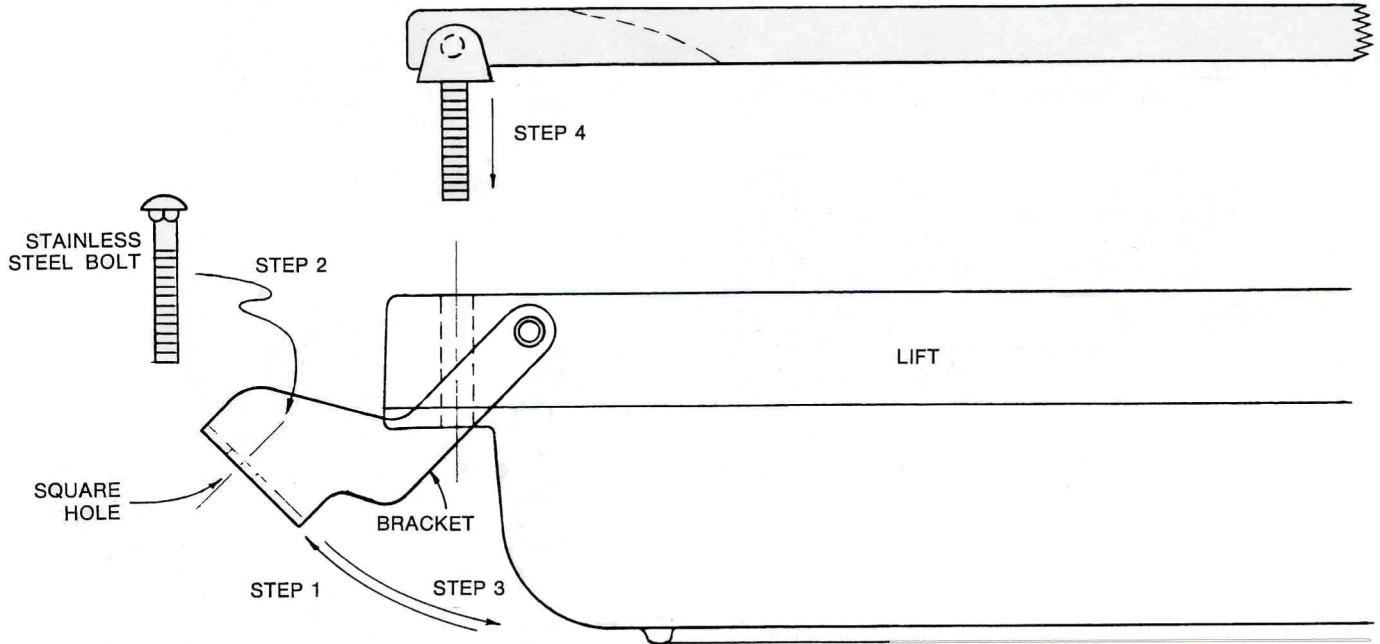

1. Set lift on bowl and swing bracket away from lift.
2. Insert two stainless steel bolts into square holes on base of bracket.
3. Raise lift until bracket is vertical. Set on toilet bowl and secure lift to bowl using hardware provided.
4. Mount toilet seat on lift.