



**Instructions for electrician
STEPS 2 - 5**

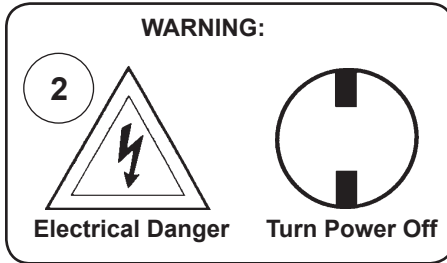

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.

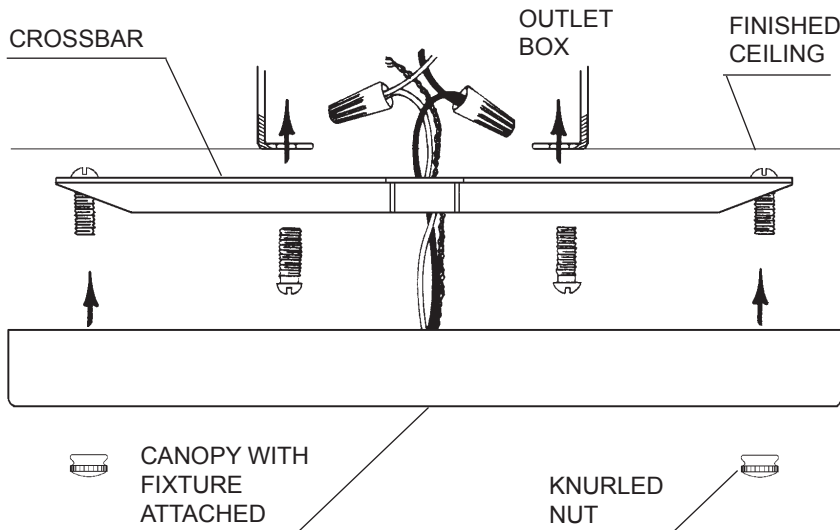


3 Feed stem wires through crossbar and attach to power wires in outlet box. Fixture **MUST** be properly grounded.

4 Attach cross bar to outlet box.

5 Check distance from ceiling to assure assembly will be flush against ceiling. Attach canopy to ceiling with (4) knurled nuts, thereby retaining complete fixture against ceiling.

CHANDELIER 2620-____ TRIM DIAGRAM
(Finish Option)

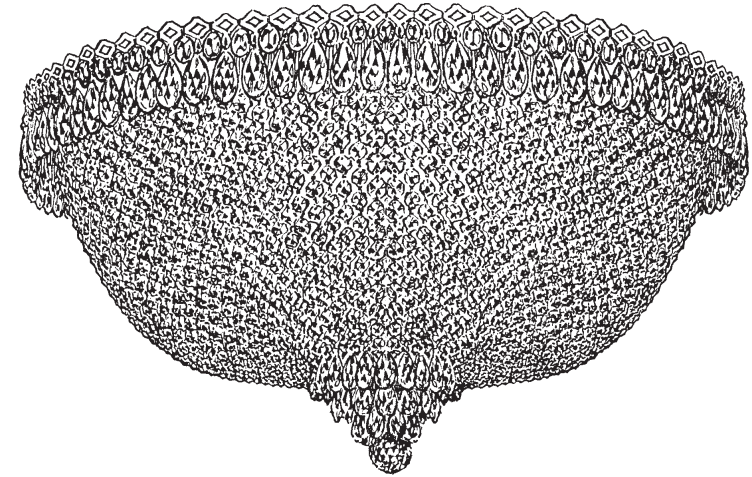

THIS DESIGN IS THE PROPRIETARY TRADE DRESS/TRADEMARK OF SWAROVSKI LIGHTING, LTD.

21 Lights
Diameter: 28"
Body Length: 15-1/2"
Hanging Weight: 32 lbs.

SCHONBEK®

**See diagram on back page
Follow steps in exact order
Save this trim diagram for future reference**

1


IMPORTANT

Person who opens carton should record the following information for future service.

CODE # _____ Four-digit number on outside of carton.
PACKER # _____ See crystal package label.
ORDER # _____ See crystal package label.



Instructions for crystal trimming
STEPS 6 - 16




6


You will need 21 - B10
 25 Watts Recommended
 40 Watts Max
 MIN 90°C SUPPLY
 CONDUCTORS

Install bulb and be sure
 to test fixture **BEFORE**
 trimming.

NOTE: Hang drop "C"
 from scallop, **NOT**
 through the loop on the
 gallery.

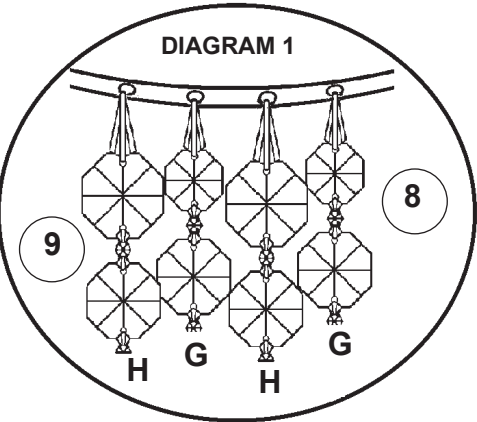


NOTE: Larger jewels at top and graduates
 to smaller jewels toward bottom of chain.

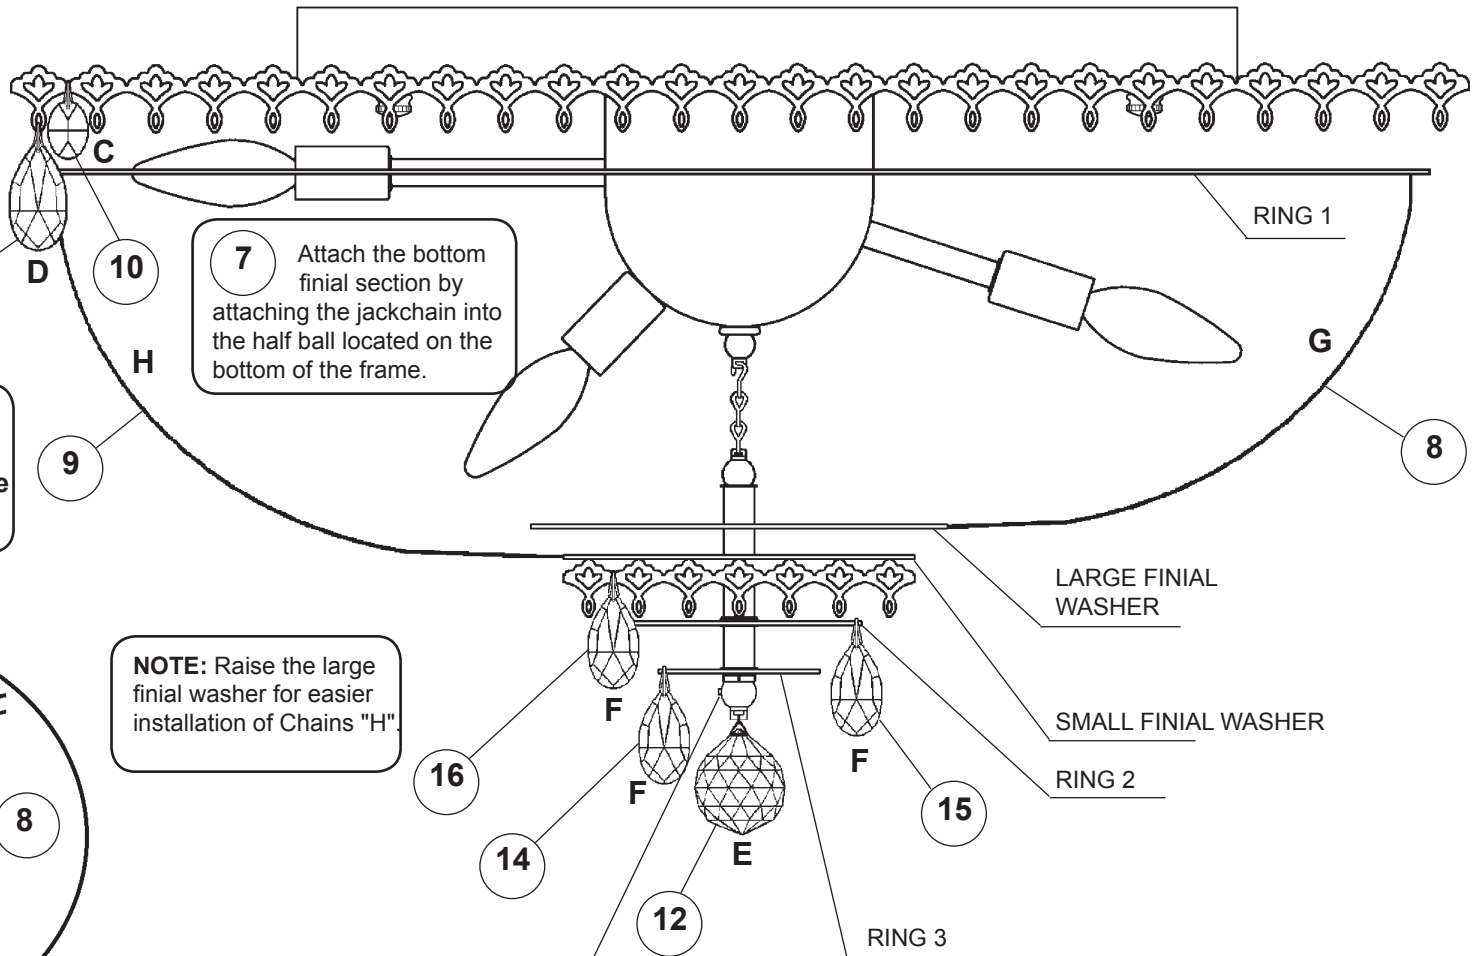

7 Attach the bottom
 finial section by
 attaching the jackchain into
 the half ball located on the
 bottom of the frame.

NOTE: Raise the large
 finial washer for easier
 installation of Chains "H".

13



Tighten With
 Tool Provided.

