


i6 LED LIGHT KIT

NEXT-LEVEL BRIGHTNESS, COLOR RANGE, AND AUTOMATED CONTROL

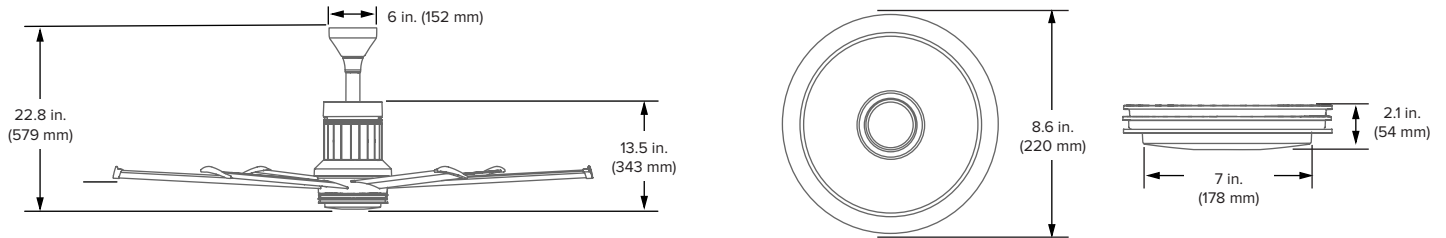

Technical Specifications

Operating Voltage	Operating Current	Nominal Input Power	Operating Temperature	Nominal Lumen Output	Efficacy	Color Rendering Index (CRI)	Corresponding Color Temperature (CCT)	Dimming Range
+24 VDC	1.1 A	25.5 W	0° to 105°F (0° to 40°C)	1,770 lm	72.6 lumens/watt	93.3	2200–6500 K	1% to 100%

Construction and Controls

Heat Sink	Lens	Installation	Environment	Controls ¹	Settings
Cast aluminum	Diffused translucent lens Made from durable polycarbonate	Twist-lock quick connect for seamless integration	Indoor and covered outdoor use	Handheld remote i6 by BAF mobile app Voice control 0–10 V Motion Sensing	16 brightness settings Dim to warm Five color temperature settings (2200–6500 K)


Light Off



Light On



Finish Options²

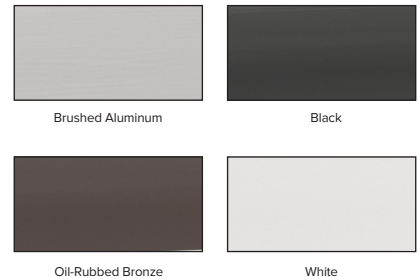

¹ Voice control requires an Amazon Alexa-enabled device or the Google Assistant.
² Light heatsink finish matches full fan finish color.



Lead times may vary.
 See full warranty for coverage information.



USA
 BIGASSFANS.COM
 877-244-3267

CANADA
 BIGASSFANS.COM
 844-924-4277

AUSTRALIA
 BIGASSFANS.COM/AU
 1300 244 277

SINGAPORE
 BIGASSFANS.COM/SG
 65 6709 8500

MALAYSIA
 BIGASSFANS.COM/SG
 603 5565 0888