

MonoRail Flush Transformer-60W LED

DESCRIPTION

This single-feed flush transformer converts standard 120 line-voltage to 12 volts to provide the necessary voltage for powering a MonoRail low-voltage lighting system. It can power lamps totaling up to 60 watts. The transformer, concealed by a decorative canopy, fits in junction box and features a fast acting secondary circuit breaker that will safely turn the system off should a short occur. Once the short has been removed the unit can be reset by simply flipping the wall switch off and back on.

INSTALLATION

This product can mount to either a 4" square electrical box with round plaster ring or an octagon electrical box (not included). Rail is installed through the power feed on the canopy to bring power to the run.

OTHER


Black and white finish have satin nickel feeds. The shortest rigid standoff that can be used with this surface transformer is the 2" rigid standoff (sold separately). If dropping the rail more than 2" below the ceiling, order the desired rigid standoff length and one compatible power extender (sold separately). 12 volt transformers require the use of 12 volt lamps.

WEIGHT

0.8lb / 0.36kg ±



monorail flush
transformer-60w
led

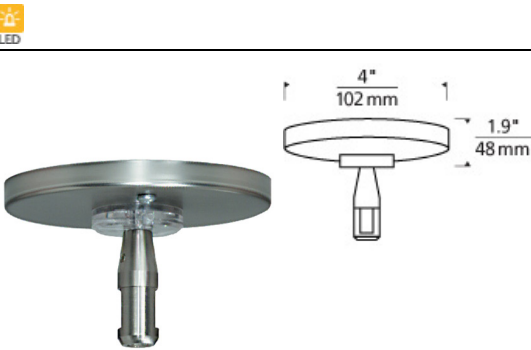

ORDERING INFORMATION

700MOFRT60E FINISH

- Z- ANTIQUE BRONZE
LED
- B- BLACK
LED
- S- SATIN NICKEL
LED
- W- WHITE
LED

As a general rule when using LED fixtures we do not recommend using greater than 70% of specified maximum wattage on the transformer due to inrush current. for assistance, please contact our technical support department.



TECH LIGHTING®

7400 Linder Avenue T 847.410.4400
Skokie, Illinois 60077 F 847.410.4500

Tech Lighting, L.L.C.

700MOFRT60E _____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____

