


LOW - VOLTAGE P E N D A N T S

Cheers Pendant

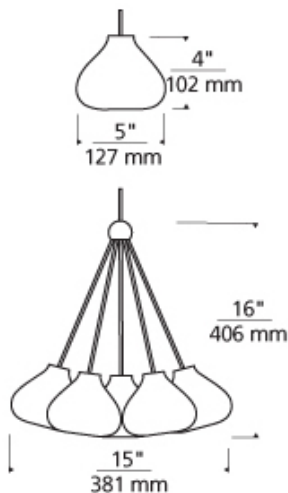

DESCRIPTION

Cheer with single fused globe includes one low-voltage, 10 watt xenon bi-pin lamp. Cheers with seven clear glass globes with fused center tubes suspended from one central hub. Cheers includes seven low-voltage, 10 watt xenon bi-pin lamps. Each include six feet of field-cutable suspension cable.

SYSTEM

Available for FreeJack, MonoRail, and Two-Circuit MonoRail. For use on T-trak, order FreeJack version and T-trak FreeJack Connector (sold separately). Not recommended for Kable Lite due to weight.

INSTALLATION

Socket terminates with FreeJack male connector, which may be installed into a system connector. Elements ordered with a system prefix include a connector for that system.

ACCESSORIES & OPTICAL CONTROLS

Swag Hook

WEIGHT

0.5-3.5lb / 0.23-1.59kg

ORDERING INFORMATION

700	SYSTEM	CHR	SHAPE OR SIZE	COLOR	FINISH	LAMP
	FJ	FREEJACK (MONO POINT)	1 CHEER - 1 LIGHT	CLEAR	Z ANTIQUE BRONZE	12 VOLT XENON
	MO	MONORAIL	7 CHEERS -		C CHROME	-24 24 VOLT
	MO2	TWO-CIRCUIT MONORAIL	7 LIGHTS		S SATIN NICKEL	HALOGEN



TECH LIGHTING®

7400 Linder Avenue T 847.410.4400
Skokie, Illinois 60077 F 847.410.4500

www.techlighting.com

700 _____ CHR _____

FIXTURE TYPE: _____

JOB NAME: _____

NOTES: _____



©2010 Tech Lighting, L.L.C. All Rights Reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.