

4" FreeJack Canopy

700FJ4SQ_, 700FJ4RF_

2.3



SINGLE PORT CANOPIES

GENERAL PRODUCT INFORMATION:




This product is suitable for indoor dry locations only.

Minimum volume of the electrical box must be 6 cubic inches (98 cubic centimeter).


Model numbers ending in “-LED” or “-LED277” can be dimmed with a low-voltage electronic dimmer, have a rated maximum output of 60 watts, and are compatible with LED elements.

All other model numbers can be dimmed with a standard incandescent dimmer, have a rated maximum output of 75 watts, and are not compatible with LED elements.


For wood canopies: Do not install any head or pendant closer than 12 inches to this canopy. Heat from the lamp may damage the wood finish.

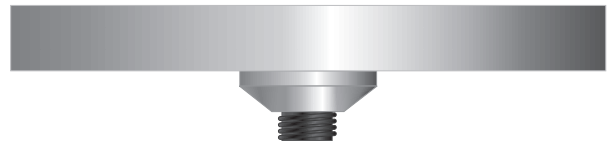


CAUTION—RISK OF FIRE
 This product requires installation by a qualified electrician. Before installing be sure to read all instructions and **TURN THE POWER TO THE ELECTRICAL BOX OFF.**

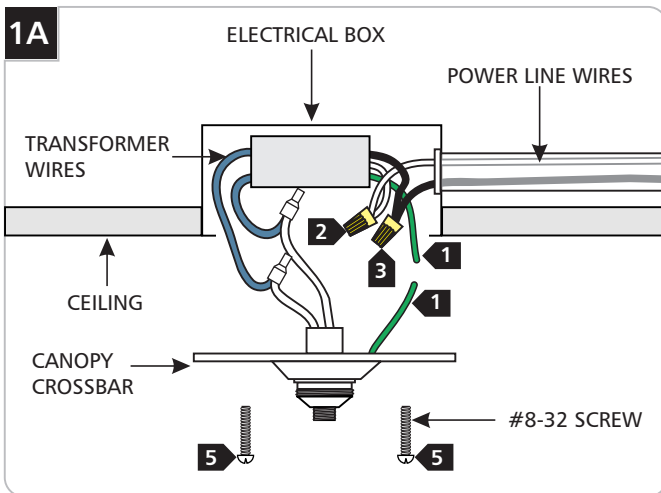

- 1 In accordance with local electrical codes, ground the green canopy and transformer wire.
- 2 Connect the white transformer wire to the neutral power line wire with a wire nut.
- 3 Connect the black transformer wire to the hot power line wire with a wire nut.
- 4 Place the transformer and all the wires inside the electrical box. Use the adhesive pad to secure the transformer in the electrical box.
- 5 Mount the canopy crossbar to the electrical box with the two long #8-32 screws.

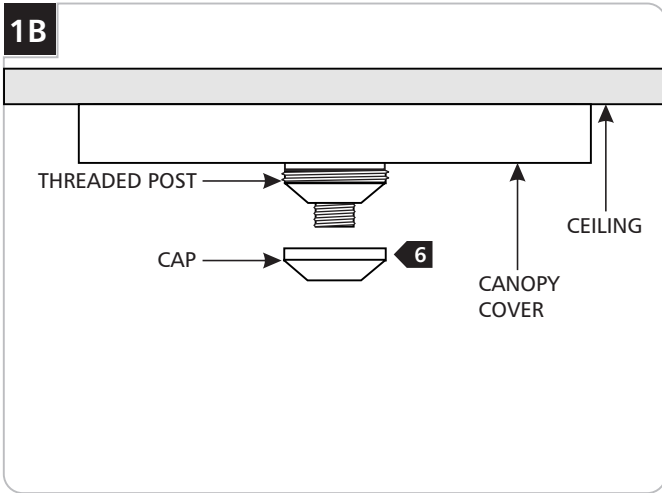

6 Place the canopy cover over the crossbar and screw the cap onto the threaded crossbar post.

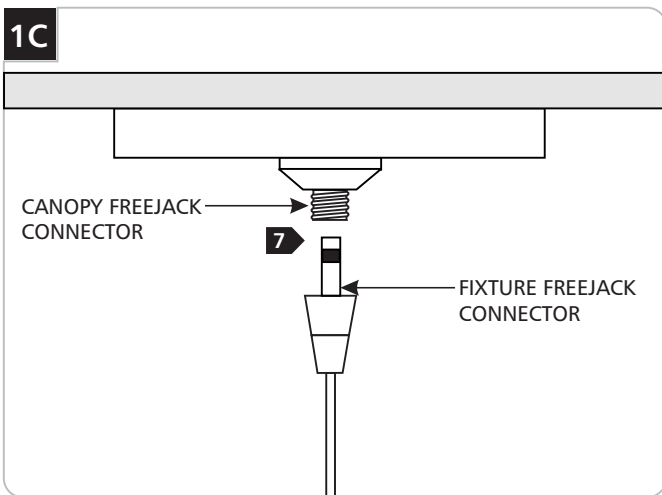

7 Screw the Fixture FreeJack male connector into the FreeJack female connector.

SAVE THESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077
847.410.4400

www.techlighting.com

© 2011 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.
A Generation Brands Company