


Submitted Model No.:\_\_\_\_\_

Specific Features:

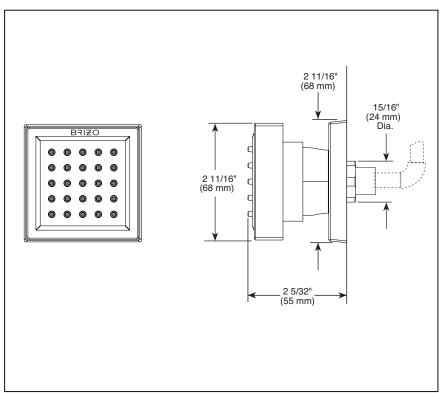

▲ Designate Proper Finish Suffix

# BRIZO

### **BODY SPRAY**

- 2.0 GPM
- 1/2" Rough-In

### STANDARD SPECIFICATIONS

- 1/2" rough-in.\*
- 30° up and down adjustment.
- 2.0 gpm @ 80 PSI.
- Solid brass construction.
- Matching finish spray face.
- Touch-clean® nubs.
- \*Note: This installation requires a 1/2" male threaded pipe fitting to extend 1/4" beyond the finished surface.


### **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.




### **COMPLIES WITH:**


ANSI/ASME A112.18.1 / CSA B125.1




Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.



Submitted Model No.:\_\_\_\_\_\_Specific Features:

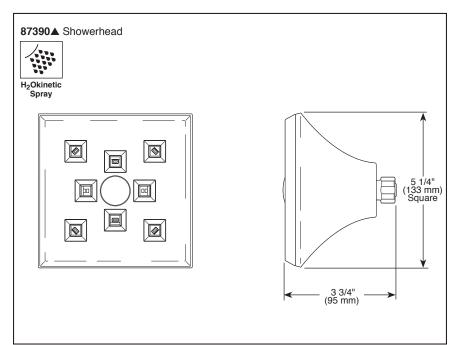



▲ Designate proper finish suffix

# BRIZO

# CEILING MOUNT SHOWERHEAD

- RSVP® Bath Collection
- Showerhead Featuring H<sub>2</sub>Okinetic Technology<sup>®</sup>
- 2.0 GPM Max @ 80 PSI

### STANDARD SPECIFICATIONS:

- H<sub>2</sub>Okinetic Technology<sup>®</sup> single function showerhead.
- Finished sprayface matches shell finish.
- Showerhead has 1/2"-14 NPSM female connection.
- Optional solid brass showerarm (RP48040).
- 2.0 gpm @ 80 PSI.
- Wrench flats for tightening.
- Showerhead ball nut pivots and rotates.

### **WARRANTY**


- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.






### **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®




**Delta Faucet Company** 

55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, Ontario, Canada N5P 4L1 © 2013 Masco Corporation of Indiana



Submitted Model No.:	
Specific Features:	

# 4 1/4" (108 mm) (76 mm) 3 1/4" +/- 1/8" (76 mm +/- 3 mm) (178 mm) $\bigcirc$ \*Finished Wall-Stringer



# BRIZO

### **SENSORI® CUSTOM SHOWER ROUGH VALVE BODY**

- R66000-WS
- Thermostatic Temperature Control Rough
- 3/4" Rough-In

### **STANDARD SPECIFICATIONS:**

- Forged brass body.
- Can be tested with air (200 PSI) or water (300 PSI) without valve, using supplied test cap.
- For use with Sensori® thermostatic trim. Cartridge ships with trim.
- Includes stops.

WARNING: No back to back installation is allowed with this product.

### WARRANTY


- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.





### **COMPLIES WITH:**

ASME A112.18.1 / CSA B125.1



Submitted Model No.:	
Specific Features:	

# 1 5/16" 2 3/8" (60 mm) 4 1/8" (105 mm) 1 3/4" Min. (44 mm) 3" Max. (76 mm)



# BRIZO

# SENSORI® CUSTOM SHOWER ROUGH

- R66600
- Volume Control Rough
- 3/4" Rough-In

### **STANDARD SPECIFICATIONS**


- Forged brass body.
- Includes ceramic stem assembly.
- All parts are replaceable from the front.
- Recommended working pressure of 45-80 PSI.
- Volume controls are rquired for every outlet and every set of body sprays (up to 7.7 gpm @ 60 psi).
- Volume control only: must be used with temperature control device.

### **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.


### **COMPLIES WITH:**

ASME A112.18.1 / CSA B125.1



### Submitted Model No.:

### Specific Features:

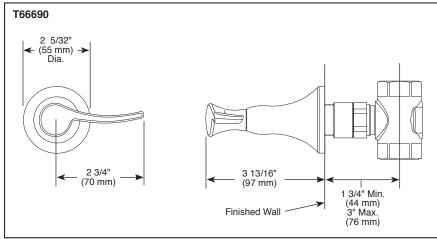

### T66695 2 5/32" (55 mm) → Dia. 3 1/2" (89 mm) 1 3/4" Min. (76 mm) (44 mm) 3" Max. Finished Wall



## BRIZO **SENSORI® CUSTOM SHOWER** TRIM

- RSVP® Collection
- Volume Contol Trim

### **STANDARD SPECIFICATIONS**

- Must also order R66600 Rough-In.
- 180° handle rotation controls volume only.
- Volume controls are required for every outlet and every set of body sprays (up to 7.7 gpm @ 60 PSI).
- All parts are replaceable from the front.
- Adjusts for wall thickness variations.
- Recommended working pressure of 45-80 PSI.
- Volume control only; must be used with temperature control device.

### **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.


### **COMPLIES WITH:**

(76 mm)

• ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1- Valve control only.


Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.


Indianapolis, Indiana 46280 A Division of Masco Corporation of Indiana © 2014 Masco Corporation of Indiana



Submitted Model No.:

**Specific Features:** 

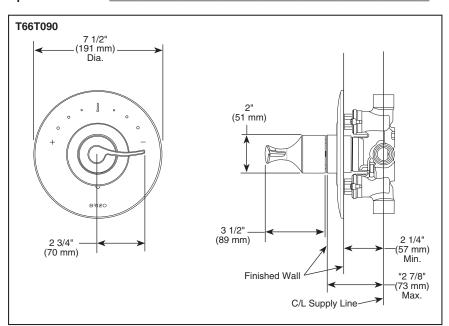

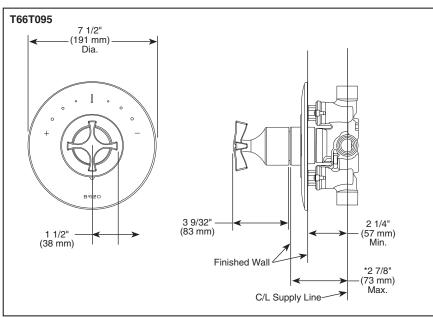

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

### BRIZO **SENSORI® CUSTOM SHOWER** TRIM

- RSVP<sup>®</sup> Collection
- Thermostatic Control Trim

### STANDARD SPECIFICATIONS

- Sensori<sup>®</sup> thermostatic control.
- Must also order R66000-WS rough valve body.
- Includes Sensori® thermostatic cartridge.
- Thermostatic wax element maintains the outlet temp
- Handle controls temperature only; must be used with one or more Sensori® volume controls.
- Graphics indicate hot/cold temp.
- Field adjustable to limit rotation into hot water zone.
- All parts are replaceable from the front of the valve.
- Adjusts for up to 5/8" wall thickness.

### WARRANTY


- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



### **COMPLETE VALVE COMPLIES WITH:**

 ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1 ■ ASSE 1016 Type T

RP72604▲ Available Extension Kit



\*Depending on the location of valve within the wall and wall thickness an optional extension kit (RP72604) can provide an additional 1 3/4" of wall thickness.

Delta Faucet Company

Indianapolis, Indiana 46280 A Division of Masco Corporation of Indiana © 2013 Masco Corporation of Indiana