


Submitted Model No.:\_\_\_

Specific Features:



RP74456 Available Extension Kit

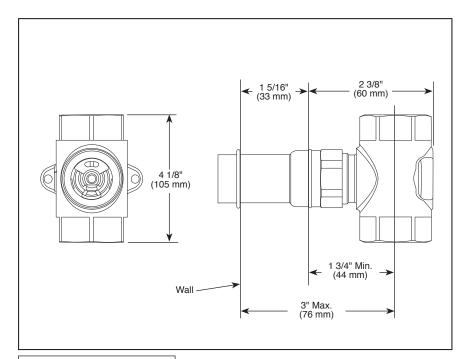

BRIZO

## SENSORI<sup>®</sup> CUSTOM SHOWER ROUGH

R66600
Volume Control Rough
3/4" Rough-In

### STANDARD SPECIFICATIONS

- Forged brass body.
- Includes ceramic stem assembly.
- All parts are replaceable from the front.
- Recommended working pressure of 45-80 PSI.Volume controls are rquired for every outlet and every
- set of body sprays (up to 7.7 gpm @ 60 psi). • Volume control only: must be used with temperature
- volume control only: must be used with temperature control device.

### WARRANTY


- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH: • ASME A112.18.1 / CSA B125.1

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.


BSP-B-R66600 Rev. D


Delta Faucet Company Indianapolis, Indiana 46280 A Division of Masco Corporation of Indiana © 2014 Masco Corporation of Indiana

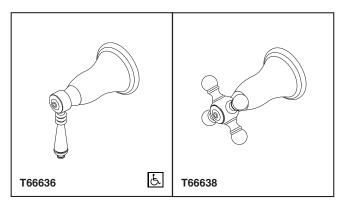

Submitted Model No.:\_\_\_

### Specific Features:

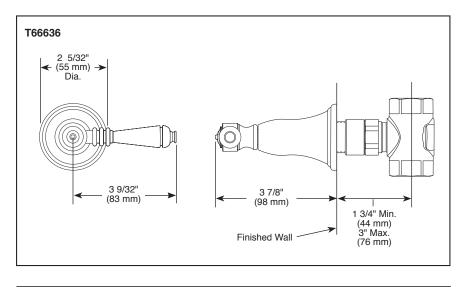

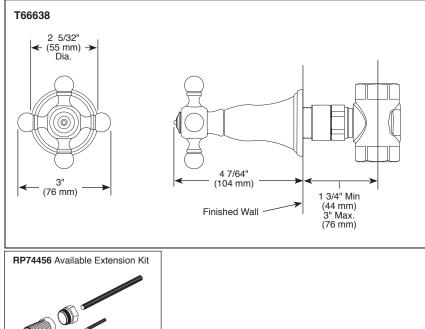

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-B-T66636 Rev. D

# BRIZO sensori® custom shower trim

■ Traditional Collection

Volume Contol Trim

### **STANDARD SPECIFICATIONS**

- Must also order R66600 Rough-In.
- 180° handle rotation controls volume only.
- Volume controls are required for every outlet and every set of body sprays (up to 7.7 gpm @ 60 PSI).
- All parts are replaceable from the front.
- Adjusts for wall thickness variations.
- Recommended working pressure of 45-80 PSI.
- Volume control only; must be used with temperature control device.

### WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH: • ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1- Valve control only.

#### **Delta Faucet Company** Indianapolis, Indiana 46280 A Division of Masco Corporation of Indiana © 2014 Masco Corporation of Indiana