



Submitted Model No.:

Specific Features:

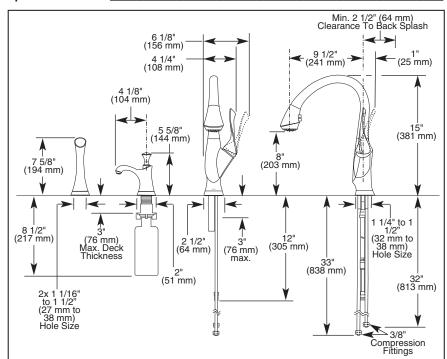

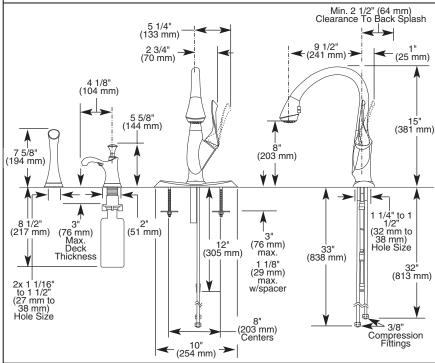

▲ Designate proper finish suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability. BSP-K-63052LF Rev. C

BRIZO

FAUCETS

- \blacksquare Belo $^{\circledR}$ Collection
- Single Handle Deck Mount
- 4-Function Pull-Down with Pause and Volume Control
- Single, 2, 3, or 4 Hole Sink Applications
- Centermount or 8" (203 mm) Centers with Optional 10" (254 mm) Escutcheon
- Optional Vase Interchangeable with Soap Dispenser

 ■ MagnaDock® Magnetic Docking

STANDARD SPECIFICATIONS:

- Single handle, 4-function pull-down kitchen faucets for exposed mounting on single, two and three hole sinks.
- Solid brass fabricated body
- 15" (381 mm) high, 9 1/2" (241 mm) long, spout swings 360°.
- Lever handle. Control mechanism shall be full-motion valve cartridgte.
- Touch-Clean® sprayhead
- Quick connect hoses
- Pull-down wand operates in an aerated or spray mode via ergonomic buttons.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Magna Dock® magnetic docking.
- Thin deck mounting aid to help secure product if used on
- Dual integral check valves in adapter assembly.
- Spacer for mounting nut to reduce number of turns required
- Mounting wrench to assist in tightening mounting
- Hose travels inside mounting shank so it will not interfere with deck edges.
- Keyed trim ring and 10" (254 mm) escutcheon to help alignment and aid installation.

Note: See 63952LF-* for matching bar/prep.

Max. 1.8 gpm @ 60 PSI, 6.8 L/min @ 414 kPa

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries

COMPLIES WITH:

ASME A112.18, 1 / CSA B125.1

Indicates compliance to ICC/ANSI A117.1

Verified to <0.25% Pb average wetted surface regulations.