


Submitted Model No.: _____

Specific Features: _____

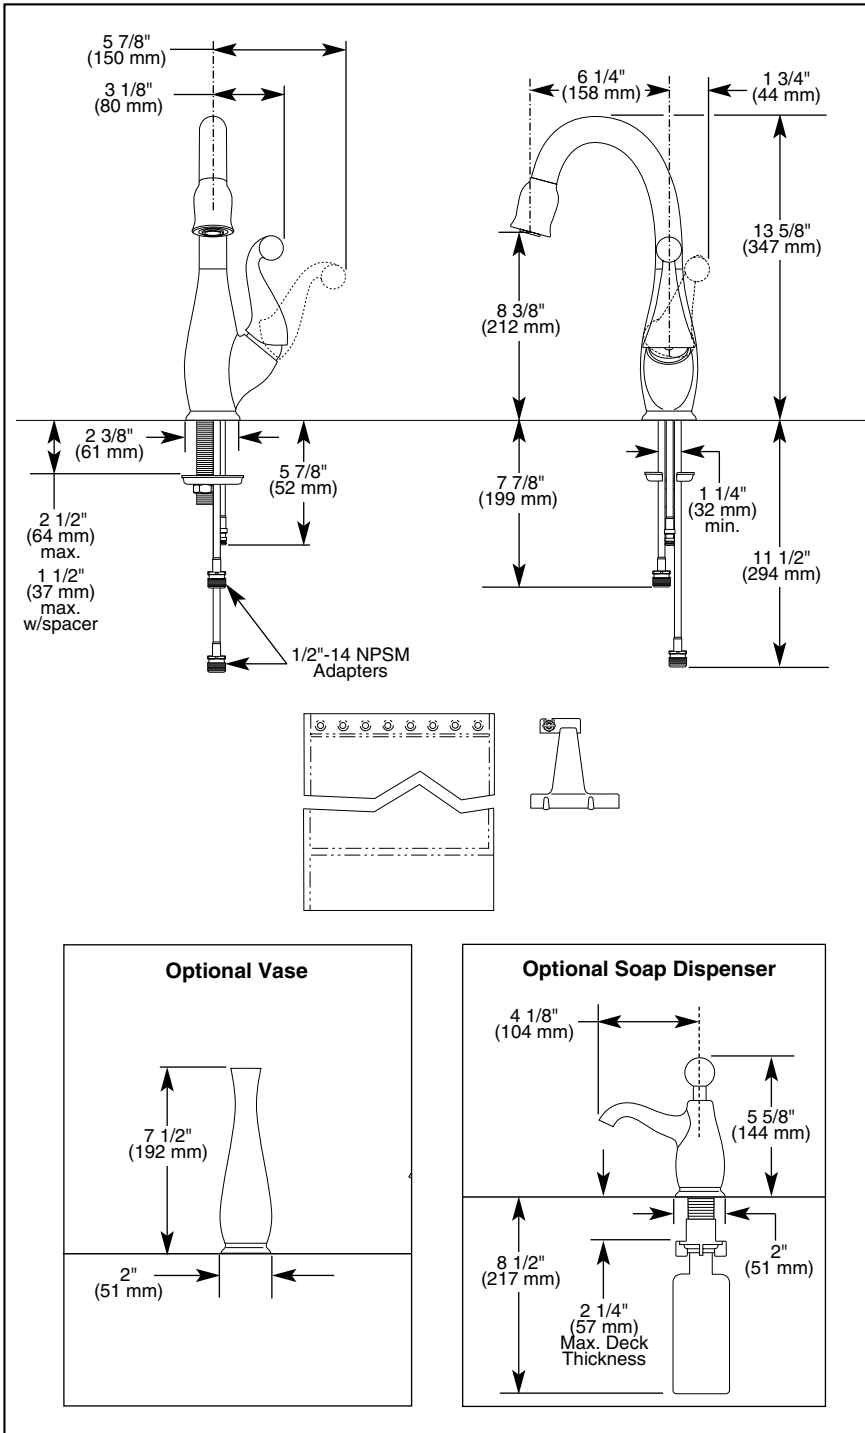

BRIZO™

BAR/PREP SINK FAUCETS

- Floriano™ Collection
- Single Handle Pull-Down
- Deck Mount
- Single or 2 Hole Sink Applications
- Optional Vase Interchangeable with Soap Dispenser





COMPLIES WITH:

- ASME A112.18.1
- CSA B125
- ICC/ANSI A117.1/ADA

STANDARD SPECIFICATIONS:

- Single handle bar/prep sink faucets for exposed mounting on single hole sinks.
- Solid brass fabricated body.
- 13 5/8" (347 mm) high, 6 1/4" (158 mm) long, spout swings 360°.
- Lever handle. Control mechanism shall be of the rotating stainless steel ball type with replaceable non-metallic seats operating in stainless steel lined sockets.
- Control shall return to neutral position when faucet is turned off.
- Quick connect hoses.
- Tangle-free bag for hose.
- Twist and lock mechanism eliminates spray head wobble.
- Red/Blue graphics on handle button to indicate hot/cold temperature.
- Dual integral check valves in sprayer assembly.
- Disposable hose lead to aide installation.
- Spacer for mounting nut to reduce number of turns required for installation.
- Mounting wrench to assist in tightening mounting nut securely.
- Hose guards integral to casting reduces wear and noise on hose.
- Hose travels inside mounting shank so it will not interfere with deck edges.
- Keyed trim ring to help alignment and aid installation.

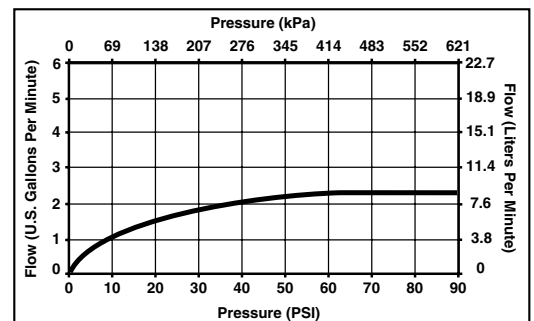

Standard Features	63510-*
Washerless	◆
Single Hole Installation	◆
2 1/2" (64 mm) Thick Deck Installation Capability	◆
Lever Handle	
13 5/8" (347 mm) High, 6 1/4" (158 mm) Long, Spout Swings 360°.	◆
3/8" O.D. Straight, Staggered Copper Supply Tubes – 7 7/8" (199 mm) and 11 1/2" (294 mm) Long	◆
Standard with 1/2"-14 NPSM Adapters	◆
Wand Matches Finish	◆
Red/Blue Graphics on handle button to indicate hot/cold temperature	◆

*To specify finish add suffix

Available Finishes

Suffix	Finish
PC	Polished Chrome
SS	<i>Brilliance</i> ® Stainless
WH	White