







Fixture Name: Trifle 5645-BA3 ST

This fixture assembled PO: _____ Date: _____

Notice: Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST

Company Name: _____ Co. Account #: _____
below to be filled out by retailer

Circular Mounting Strap  1 ea $\Phi 102 \times H1.4 \text{mm}$	Mounting screw  2 ea 8/32-IP*1"	Mounting screw  2 ea 5/32-IP*1-1/4"
Hex nut  2 ea 5/32-IP*H3mm	Wire connector  2 ea A3 Orange	Deco nuts  2 ea 5/32-IP*H9mm
Part Needed _____	Quantity _____	
Part Needed _____	Quantity _____	
Reason why Comments (missing, scratched, broken glass, bent, bad finish)		

FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.


1. Install the light bulbs in accordance with the fixture's specification. Use a tissue or paper towel to hold the bulb and push down into socket. Oils or dirt can cause the bulb life to shorten. rubbing alcohol is recommended to clean the bulbs with if dirty.
2. Place the Glass Shade (H) over the Socket (G).
3. Hold the Glass Shade (H) and secure it by threading the Socket Ring (K) onto the Threaded Socket (G) until tight. Wrap the Tension Spring (J) onto the Socket Ring (K) and push the Small Glass (I) gently over the Tension Spring (J).

(DO NOT EXCEED THE MAXIMUM WATTAGE RATING!)

NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.

5645-BA4

Fig 1

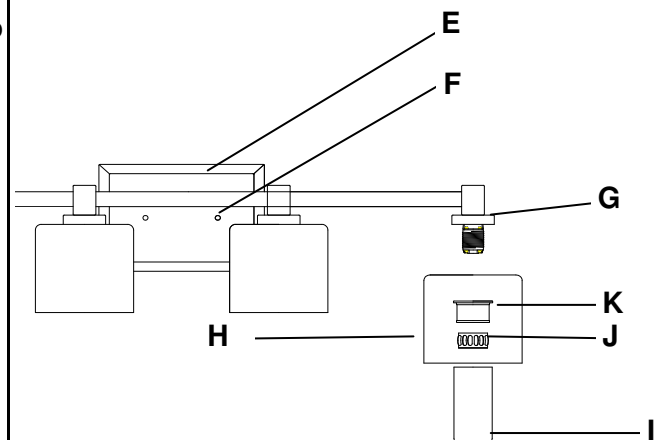


Replace bulb with a 40W G9 base halogen bulb in accordance with the fixture's specifications.

For Customer Service, contact the place of purchase to arrange for replacement parts.

WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.


HANGING THE FIXTURE (Fig 1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from wall, including the old mounting strap.
3. The Mounting Strap (B) contains several pairs of threaded holes, find the pair of holes that match the holes spacing in your fixture Back Plate (E) and thread the two Fixture Mounting Screws (C) half way into the Fixture Mounting Strap (B).
4. Place the Mounting Strap (B) over the Junction Box so the Fixture Mounting Screws (C) are vertical or horizontal, as required by the fixture type.
5. Attach the Fixture Mounting Strap (B) to the Junction Box using the two mounting screws (A). Tighten the screws (A) securely with screwdriver.

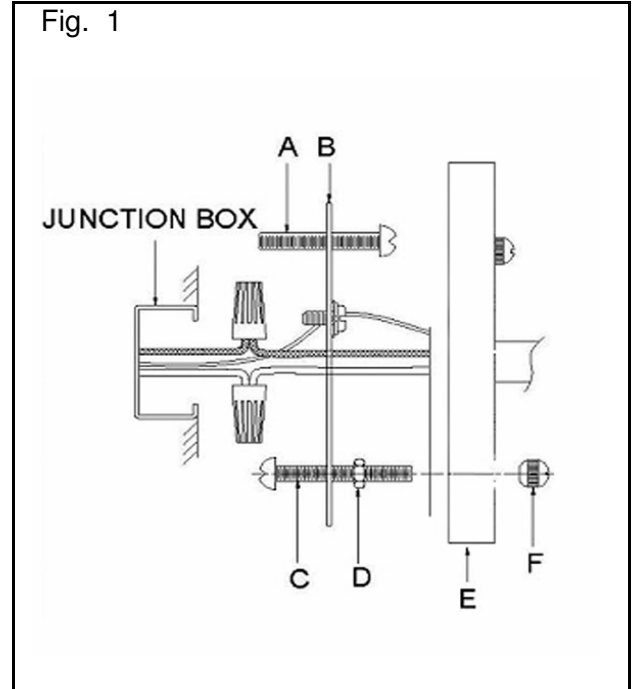

CONNECTING THE WIRES (Fig 2)

6. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
 7. Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (B) or connect both wires together using the correct size of wire connectors.
- NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.
8. Tuck these wire connections neatly into the Junction Box.

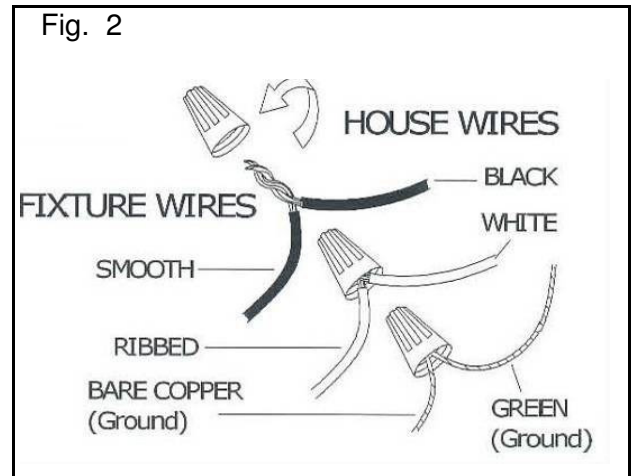

FINISHING THE INSTALLATION (Fig 3)

9. Place the fixture Back Plate (E) over the two Mounting Screws (C) and secure the Back Plate (E) against the wall by threading two Deco nuts (F) over the two Mounting Screws (C) until tight as shown on Fig.1

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.

