






**GOLDEN**  
*Elegant lighting for everyday living*

# PARTS & ASSEMBLY SHEET

Fixture Name: Hampden 6262-FM DNI

This fixture assembled PO: \_\_\_\_\_ Date: \_\_\_\_\_

**Notice:** Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST		Company Name: _____ Co. Account #: _____ to be filled out by retailer	
Mounting Strap 1ea W3-7/8"*E1"*10mm 	Hex Nut 2ea 5/32-IP*H3mm 	Wire connectors 3ea P3 Orange 	
Mounting Screws 2ea 5/32-IP*1-3/4" 	Mounting Screws 2ea 8#32-IP*1" 	Frame ring 1ea Ø15-1/4"*H67mm 	
Part Needed _____		Quantity _____	
Part Needed _____		Quantity _____	
Reason why _____	( missing, scratched, broken glass, bent, bad finish)		
Comments _____			

## FIXTURE ASSEMBLY INSTRUCTIONS

**Read and review installation instruction sheet before assembling the fixture.**

1. Place the glass (M) into the Frame ring (N), and make the top of glass level. Turn arm (L) in to the center then thread the screw (K) into the arm (L) and tighten to the frame ring (N).

2. Install the light bulbs in accordance with the fixture's specifications.

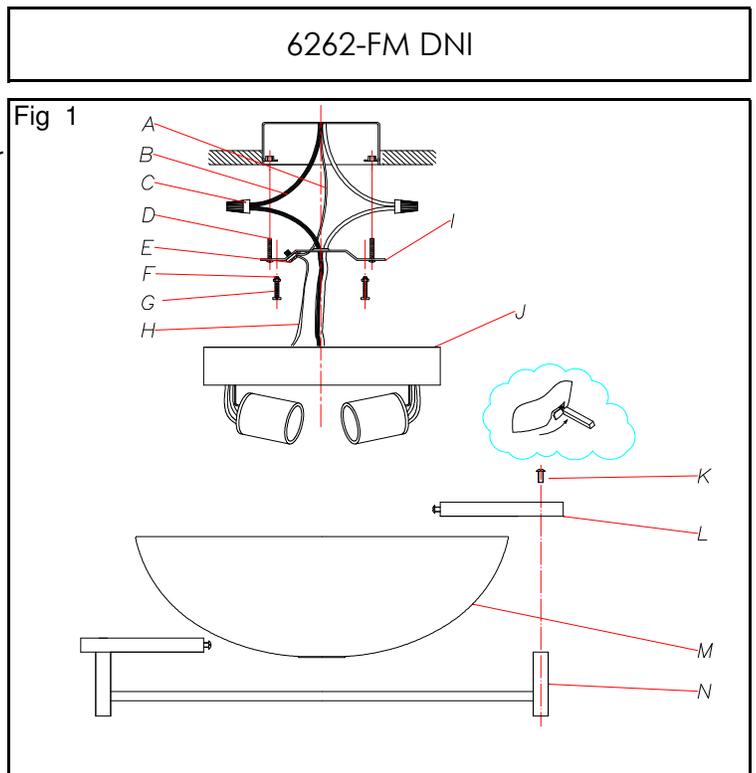
3. Raise the glass/frame assembly to the installed ceiling pan, insert the screws at arm ends into the keyhole slots on ceiling pan, turn right and then down.

\*See the cloud inset.

Check whether the fixture is hanging securely.

(DO NOT EXCEED MAXIMUM WATTAGE RATING!)

**NOTE: INSTALL THE GLASS ASSEMBLY AFTER THE FIXTURE IS HUNG.**



For Customer Service, contact the place of purchase to arrange for replacement parts.

## WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

### HANGING THE FIXTURE (Fig. 1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all your parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off power at the circuit breaker and remove the old fixture from ceiling, including the old mounting strap.
3. Thread the two Fixture Mounting Screws ( G ) into the pre-drilled Holes in the Mounting Strap ( E ) spaced the same distance apart as the holes in the Ceiling Pan. Secure in place with Hex nuts ( F ).
4. Attach Mounting Strap ( E ) to the junction box using the two Mounting Screws ( D )

### CONNECTING THE WIRES (Fig. 2)

5. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
  6. Attach the GROUND wire (GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket ( E ) or connect both wires together using the correct size of wire connectors.
- NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.
7. Tuck these wire connections neatly into the Junction Box.

### FINISHING THE INSTALLATION (Fig. 3)

8. Finish mounting the Ceiling Pan ( J ) by placing it over the Mounting Strap ( E ) as shown on FIG.1. Rotate the Pan until the Mounting screws ( G ) protrude through the "Keyholes" located in the bottom of Ceiling Pan ( J ). Using a screw driver, secure the Ceiling Pan ( D ) by screwing Mounting Screws ( G ) until taut.
9. Install the light bulbs and glass shade as per the assembly instructions

**YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE.**

