



# PARTS & ASSEMBLY SHEET

Fixture Name: Echelon 8981-5 BRI / GRM

This fixture assembled PO: \_\_\_\_\_ Date: \_\_\_\_\_

**Notice:** Please review the parts listing and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

## PARTS LIST

Company Name: \_\_\_\_\_ Co. Account #: \_\_\_\_\_  
to be filled out by retailer


Canopy	1ea	Hex nut	2ea	Nipple	2ea
Chain	1ea 6ft	Wire Connector	2ea	Bottom cap	1ea
Chain connector	2ea	Mounting Screw	2ea	Finial	1ea
Mounting Strap w/ ground screw	1ea	Canopy Loop and Canopy loop collar	1ea	Crystal drops are not included in parts bag. They are already installed on the fixture.	
Crystal draping A7 x 5pcs 	Crystal drops B2 x 15pcs	Crystal drops B5 x 5pcs	Crystal drops C3 x 5pcs	Crystal drops D1 x 5pcs	Crystal drops D4 x 5p
Part Needed				Quantity	
Part Needed				Quantity	
Reason why	( missing, scratched, broken glass, bent, bad finish)				
Comments					

## FIXTURE ASSEMBLY INSTRUCTIONS

Read and review installation instruction sheet before assembling the fixture.

8981-5 BRI / GRM

1. Feed the fixture wires through the long Threaded rod (F) and pull the wires until taut.
2. Slide the tube (E), tube lid (D), cup (C), long Threaded rod (F), Top cap (B), Top loop (A) down to housing of fixture.
3. Screw Threaded rod (F) all the way into the coupler (L) at housing of fixture. Screw Top loop (A) into Top cap (B).  
NOTE: THE SHADE ASSEMBLY CAN BE DAMAGED BY ROUGH HANDLING. USE CARE WHEN ASSEMBLING.

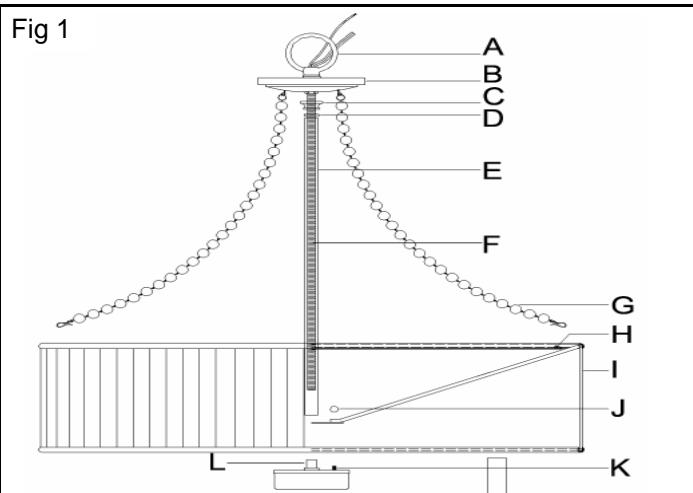

For Customer Service, contact the place of purchase to arrange for replacement parts.

# PARTS & ASSEMBLY SHEET

Fixture Name: Echelon 8981-5 BRI / GRM

\* NOTE: The Finial can be scratched or broken if the full weight of the fixture is placed on it. To avoid damage attach the Bottom Assembly parts after hanging the fixture.

4. Slide the center support of the Fabric shade(I) over center tube to the housing, it is open on one side for ease of assembly. Secure in place by tightening Cap nut (J) to Frame (K) with frame of shade between them (I).

5. Attach 3 crystal draping chain (G) to hook (H) of shade.

6. By measuring determine correct number of links needed for proper hanging height. Use a pair of pliers to open one link of the Chain (A2) then remove the excess Chain (A2) and discard it.

7. Use one chain connector(A12) to attach one end of the chain to the Top loop (A) and close the chain connector.

8. Feed the fixture wires through the Chain (every three links) and pull the wires until taut.

9. Slip Canopy loop collar (A11) over the chain, then do the same with the canopy .

10. When ready to complete the installation Use the other chain connector and attach the other end of the chain to the canopy loop (A10) and close the chain connector.

11. Make sure the weight of the chandelier is supported by the chain-not the electrical wire.

\* You may now install the fixture.

Note: Complete these remaining steps after the fixture is hung.

12. Secure threaded nipple (P) to bushing (M) of housing and screw Hex nut (N) on to secure.

13. Place Bottom cap (O) over the Threaded nipple (P).

14. Screw Finial (Q) to threaded nipple (P).

15. Install the light bulbs in accordance with the fixture's specifications.

(DO NOT EXCEED MAXIMUM WATTAGE RATING)

Fig 2

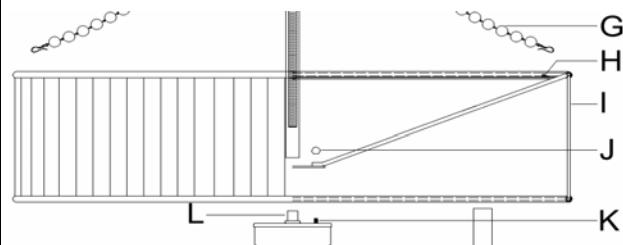


Fig 3


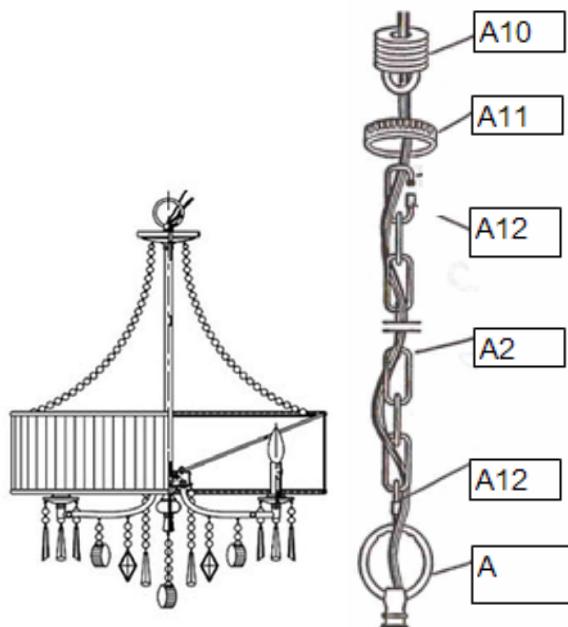


Fig 4



For Customer Service, contact the place of purchase to arrange for replacement parts.

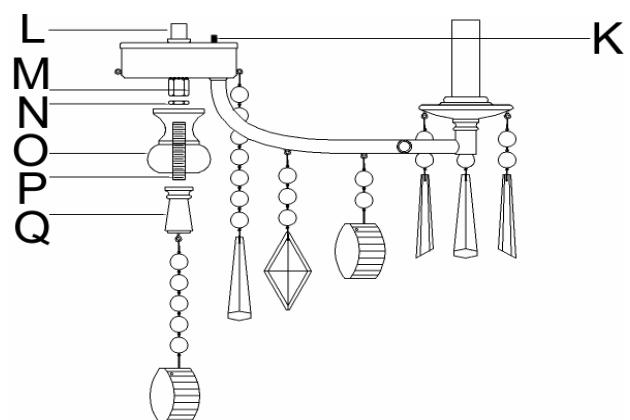

# INSTALLATION INSTRUCTIONS

Fixture Name: Echelon 8981-3P, 5, 9, M1L BRI / GRM


For Chandelier Light Fixture

## WARNING ! SHUT OFF POWER AT FUSE OR CIRCUIT BREAKER.

### HANGING THE FIXTURE (Fig.1)

1. Carefully remove the new fixture from the carton and the yellow bag that holds all parts. Check that all parts are included as shown in the illustration and parts list.
2. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old mounting strap.
3. Thread Nipple(A-8) into Canopy loop (A-11) until snug. Thread Hex nut (A-6) and Washer (A-5) on next.
4. Thread other end of the Nipple (A-8) with Canopy loop attached into Mounting strap (A-4) about 4 complete turns.
5. Tighten the Washer (A-5) and Hex Nut (A-6) until snug to the Mounting strap(A-4).
6. Take this mounting strap assembly and mount to ceiling junction box with Mounting Screws (A-7). Tighten screws securely with screw driver.
7. Unscrew the Canopy loop collar(A-10)from the Canopy loop. Take the canopy and pass over the Canopy loop. approximately one half of the canopy loop exterior threads should be exposed. Adjust until desired height is reached. \*the Canopy loop collar should fit snugly on the Canopy loop after the canopy is installed.
- Remove Canopy and Canopy loop collar.
8. Assemble the fixture and have an assistant or secure support hold the weight of the fixture while you complete the wiring connections.
9. Thread the fixture wires and ground wire of the assembled fixture through the canopy loop and nipple and into the outlet box.


Fig. 1

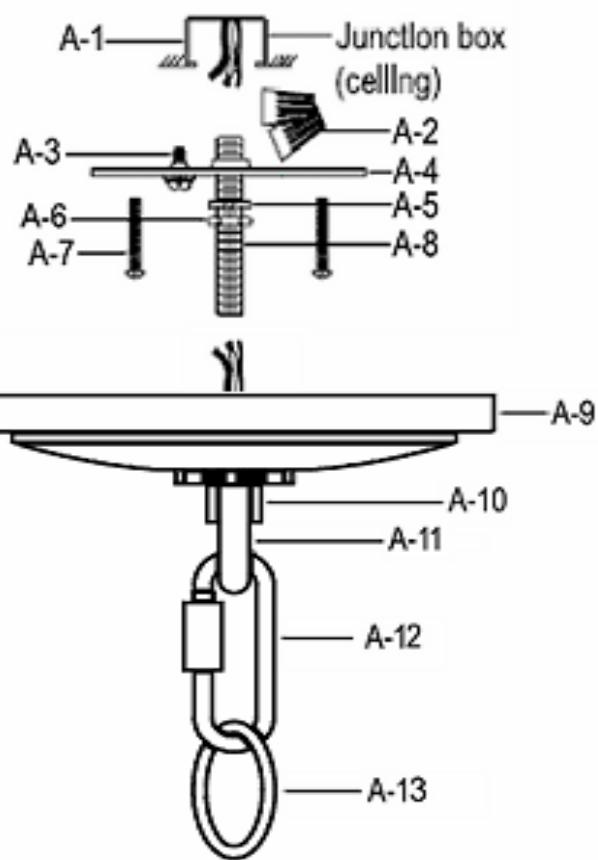

### CONNECTING THE WIRES (Fig. 2)

10. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
  11. Attach the GROUND wire(GREEN or COPPER) from the Junction Box and the fixture Ground wire to the green Ground Screw on the Mounting Bracket (A-4) or connect both wires together using the correct size of wire connectors.
- NOTE: Twist the wires together in the same direction you twist the wire connector onto the wires.
12. Tuck these wire connections neatly into the Junction Box.


Fig. 2

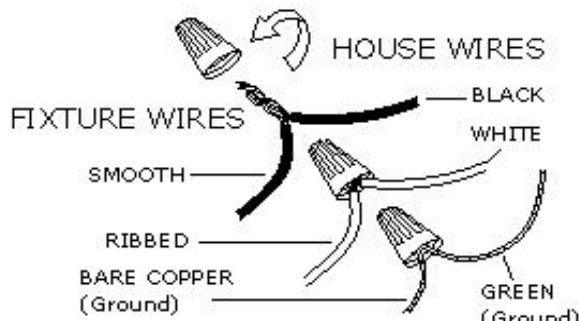


YOUR INSTALLATION IS NOW COMPLETE.  
RETURN POWER TO THE JUNCTION BOX AND  
TEST THE FIXTURE.

For Customer Service, contact the place of purchase to arrange for replacement parts.


## CRYSTAL INSTRUCTION

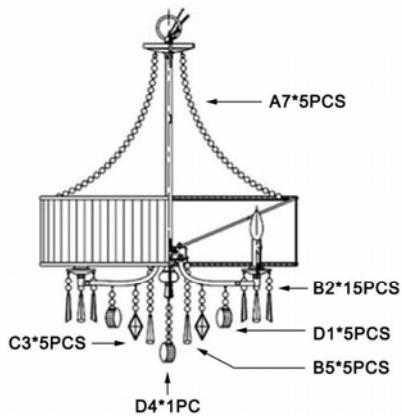


8981/5

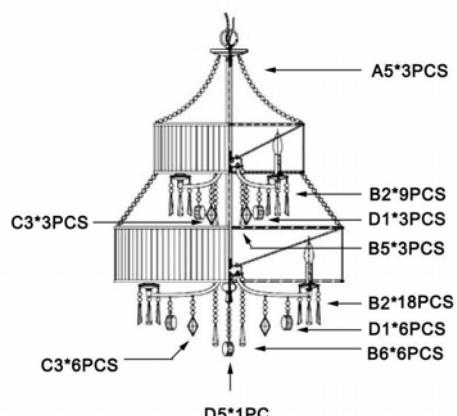


8981/9

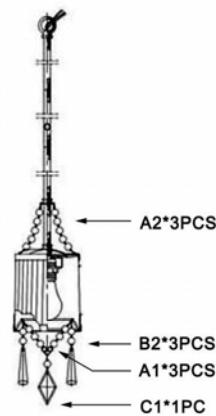


8981/M1L

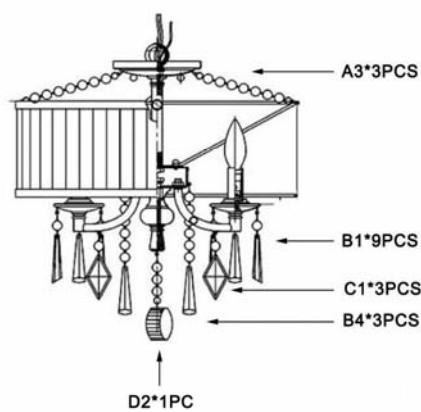


8981/SF

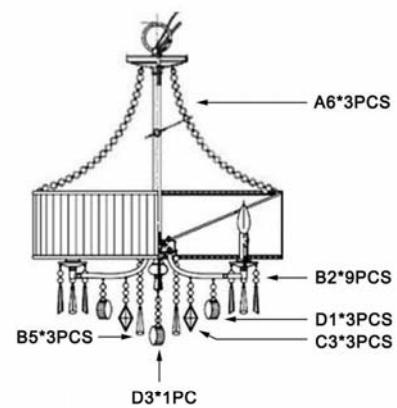


8981/3P

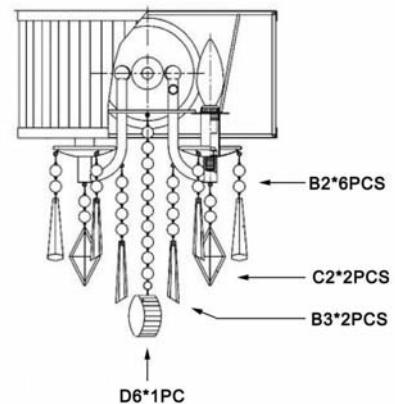


8981/WSC




8981/BA2



8981/BA3

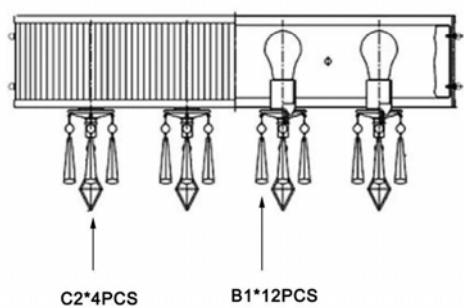

8981/BA4

A-Crystal drop							Crystal number and size
A1	A2	A3	A4	A5	A6	A7	
 K508*3pcs							
 K508*5pcs							
 K508*7pcs							
 K508*11pcs							
 K508*17pcs							
 K508*19pcs							
 K508*25pcs							
							 K508
							 K521
							 K525
							 K526
B-Crystal drop							
B1	B2	B3	B4	B5	B6		
 K508*1pc+K521*1pc		 K508*2pcs+K521*1pc		 K508*4pcs+K521*1pc		 K508*6pcs+K521*1pc	
 K508*7pcs+K521*1pc				 K508*9pcs+K521*1pc			
C-Crystal drop							
C1	C2	C3					
 K508*1pc+K525*1pc		 K508*2pcs+K525*1pc		 K508*3pcs+K525*1pc			
D-Crystal drop							
D1	D2	D3	D4	D5	D6		
 K508*2pcs+K526 *1pc		 K508*3pcs+K526 *1pc		 K508*4pcs+K526 *1pc		 K508*5pcs+K526 *1pc	
 K508*6pcs+K526 *1pc				 K508*10pcs+K526 *1pc			