

FROM THE LEADER IN
INDOOR AIR QUALITY

BROAN
NuTone
BETTER AIR. BETTER LIFE.



Keep your promises. Lo-Profile, 50-80-100 CFM with continuous run that lives up to the claim.

Exclusive selectable
50-80-100 CFM plus
continuous run



Flexible wall or
ceiling mount

THE ONE AND ONLY

Lo-Profile solution
in the market that offers
50-80-100 selectable CFM +
continuous run

EXCLUSIVE TrueCFM™

Even with complicated
ducting, the installed fan will
not lose CFM performance,
unlike the competition¹



Lo-Profile. The only solution in the market that offers 50-80-100 selectable CFM + continuous run




Fan (LP510R, LP510RS) and Fan/Light (LP510RSL) Features

- Selectable speeds of 50-80-100 CFM for right-sized ventilation in rooms up to 90 sq. ft.
- Continuous Run Mode maintains airflow to reduce mold/mildew risk
- ENERGY STAR® & ASHRAE 62.2 Certified
- Quiet performance at 0.4/0.9/1.2 Sones—enough sound to know it's on
- Adjustable low CFM setting allows precise adjustment to prevent over-ventilating and maximize energy efficiency
- ETL* listed for use over bathtubs and showers when connected to GFCI protected branch circuit (ceiling install only)
- 4" oval duct connection enables ceiling or wall mounting
- Optional 4" oval to 3" round duct adapter (S1110515) sold separately
- LP510RSL fan/light features bright 4000K, energy-efficient LED lighting to help illuminate your room
- LP510RS fan and LP510RSL fan/light feature a built-in humidity sensor that responds automatically to rapid increases in humidity and adjusts fan speed to high
- LP510RS fan and LP510RSL fan/light feature an adjustable time delay—fan runs at high speed before returning to a continuous lower speed; factory-set, 20-minute time delay

*Intertek Testing Services, formerly Edis-on Testing Laboratories

TrueCFM™ technology maintains CFM performance even with complicated ducting

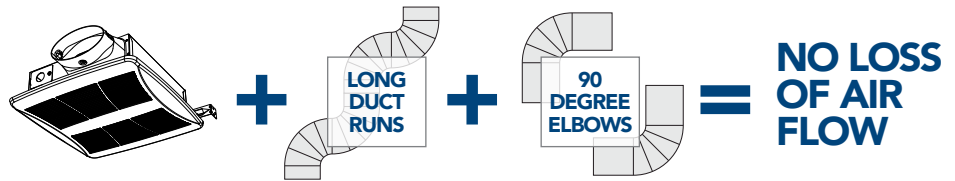


	Current Broan	New Broan	Panasonic ¹	Panasonic ¹	Panasonic ¹
Fan Models	LP80	LP510R, LP510RS	FV-0510VS1	FV-0810VSS1	FV-0510VSC1
Fan/Light Model	—	LP510RSL	FV-0510VSL1	FV-0810VSSL1	FV-0510VSSL1
Selectable CFM	✗	✓	✓	✓	✓
CFM	80	50-80-100	50-80-100	80-100	50-80-100
Sones	1.0	0.4/0.9/1.2	0.3/0.4/0.9	0.4/0.9	0.3/0.4/0.9
Humidity Sensor	✗	✓**	✗	✗	✓
Continuous Run	✗	✓	✗	✓	✗
Duct Size	4"	4"	4"	4"	4"
ENERGY STAR®	✓	✓	✓	✓	✓
Housing LxWxH	10.5" x 11.375" x 4"	10.25" x 10.25" x 3.375"	→		

ENERGY STAR® fans use 70% less energy, on average, than standard models and may qualify for local utility rebates.

**Only the LP510RS and LP510RSL have a humidity sensor.



Broan LP510R, LP510RS & LP510RSL fans maintain CFM up to 0.4" static pressure.

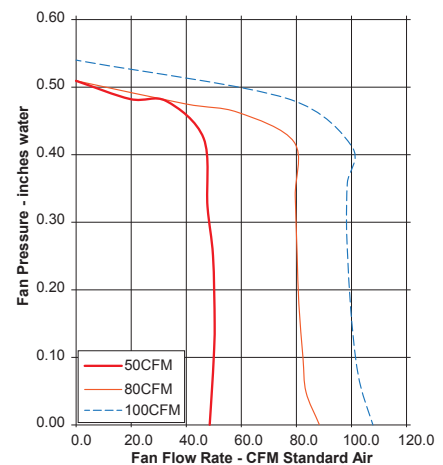

BROAN-NUTONE.COM | 800-558-1711 | 926 WEST STATE STREET, HARTFORD, WISCONSIN 53027

FROM THE LEADER IN INDOOR AIR QUALITY