

INSTALLATION INSTRUCTIONS

Model #9927-PL&9928-PL

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

1. Shut off power at the circuit breaker and remove old fixture including mounting hardware.
 2. Carefully unpack your new fixture and lay out all the parts in a clear area. Take care not to misplace any small parts necessary for installation.
 3. Unscrew the Allen screw (J) and remove the cage (K) and the shade (I).
 4. Pull black and white wires out of electrical outlet box (A).
 5. Thread the two studs (B) into the pre-drilled holes in the single bar (E) spaced the same distance apart as the holes in the canopy (G), and then tighten with the Nut (C)
 6. Attach single bar (E) using Outlet Box Screws (D) to the outlet box (A) (Fig 1).
 7. Connect the electrical wires as shown in Fig.2. Making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's Ground wire to it. Otherwise, connect the fixture's Ground wire directly to the single bar using the Green Screw (F) provided.
 8. Place the canopy (G) into stud (B) and secure it tightly against the wall using cap nut (H). (Fig 1)
 9. Install the light bulb in accordance with the fixture specification (1*13W).
 10. The ballast in each of these models can be replaced by a qualified electrician without cutting of wires and without damage to the housing, trim, decorative elements or carpentry to which the fixture is attached. See Fig.3 for more detail.
 11. Replace the cage (K) and the shade (I) and secure with screws (J).
 12. Contains Mercury (HG) Dispose of according to Local, State and Federal Law. (www.epa.gov/bulbrecycling).
- Your installation is now complete. Return power to the outlet box and test the fixture.

Fig. 1

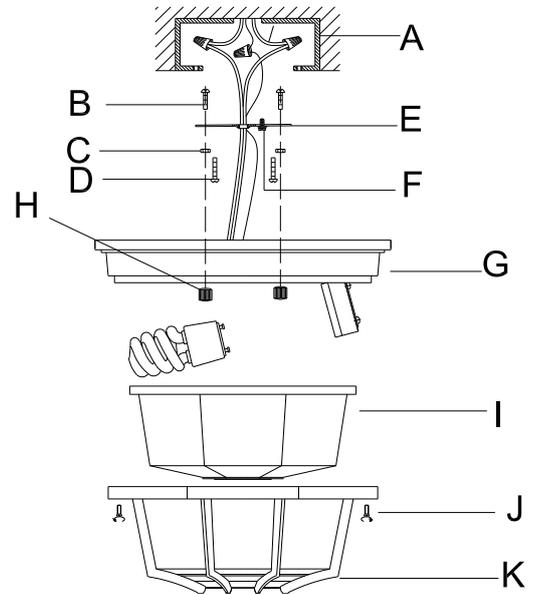


Fig.2


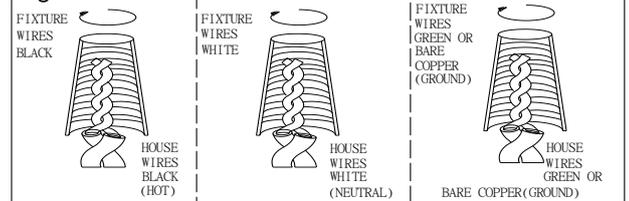


Fig.3



“CAUTION-RISK OF FIRE CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR”

ATTENTION – RISQUE D'INCENDIE. CONSULTER UN ÉLECTRICIEN QUALIFIÉ POUR VOUS ASSURER QUE LES CONDUCTEURS DE LA DÉRIVATION SONT ADÉQUATS.

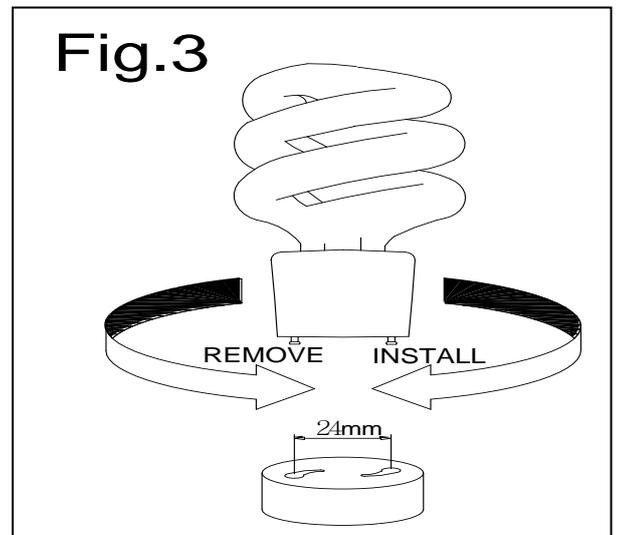

american
lighting
association