


INSTALLATION AND WIRING DIAGRAM

FLIGHT

POWER FEEDS

ART. NO. 225 030mc matte chrome



IMPORTANT SAFETY INSTRUCTIONS



1. SAVE THESE INSTRUCTIONS AND REFER TO THEM WHEN ADDITIONS TO OR CHANGES IN THE TRACK CONFIGURATION ARE MADE.
2. THIS PRODUCT MUST BE INSTALLED BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED, IN ACCORDANCE WITH LOCAL AND NATIONAL CODE.
3. Do not install this track in Damp or Wet locations.
4. Do not install any part of the track less than 7 feet above the floor.
5. Do not install any fixture assembly closer than 6 inches from any curtain, or similar combustible material.
6. Turn off power prior to any work on the systems.
7. Do not attempt to energize anything other than lighting track fixtures specified for use with the FLIGHT system. To reduce the risk of fire and electric shock, do not attempt to connect power tools, extension cords, appliances, and the like to the track.
8. This track system **MUST BE HARD WIRED**. For all the wire connections, use Listed Wire Nuts.
9. Total wattage of the system must never exceed 300W or wattage supplied by the low-voltage transformer.
10. Secondary connections must be clean and tight to avoid arcing and overheating!
11. Warranty is void in case of unauthorized modifications and/ or improper use.

READ ALL OF THESE INSTALLATION INSTRUCTIONS BEFORE INSTALLING THE FIXTURE

Contents of Delivery:

FLIGHT POWER FEEDS - qty. (1 set of two feed elements)

Step 1.

Due to the anodized surfaces of the FLIGHT and its parts, special care must be used when installing the power feeds.

Make sure that the power feed is tightened firmly to the track; an improper connection will cause arcing and overheating. The power feed cables should be connected to the transformer terminals.


- Loosen the two side allen screws (A) on each side of the feed elements (B).

- Slide the two feed elements (B) onto the track (C).

- Retighten the side allen screws (A) firmly.

- Connect the power supply cables (D) to the power supply cables from the low-voltage transformer (not shown). Use wire crimps provided (E). Tighten side screw (F) to complete.

Front View

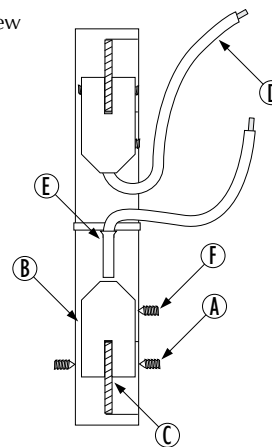

Side View

