


INSTALLATION INSTRUCTIONS

TECHNICAL

RING SUSPENSION PLATE

ART. NO.	240500ch	chrome
	240500mc	matte chrome




IMPORTANT SAFETY INSTRUCTIONS



1. Read all instructions!
2. Turn off power prior to any work on the systems.
3. THIS PRODUCT MUST BE INSTALLED BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED, IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE.
5. Only BRUCK fixtures and components may be used with the system.
6. Warranty is void in case of unauthorized modifications and/ or improper use.

READ ALL OF THESE INSTALLATION INSTRUCTIONS BEFORE INSTALLING THE SYSTEM

This Package Contains:

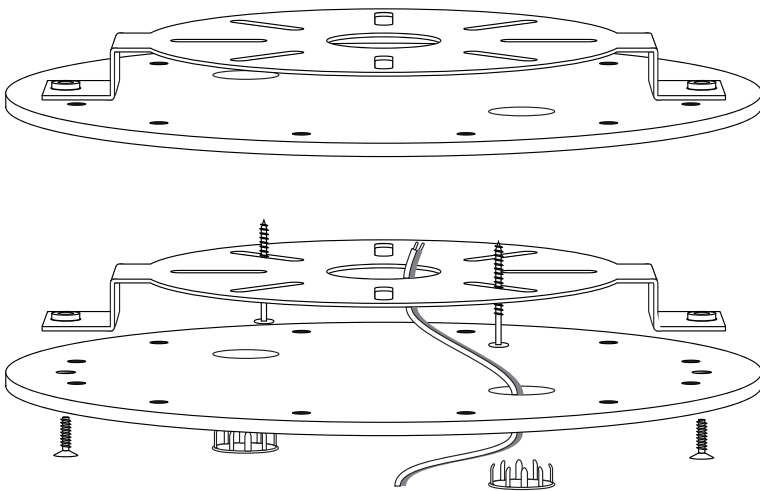

The Ring Suspension Plate is shipped pre-assembled. This item should be mounted over a rated J-box or a surface that is capable to support the weight of the fixture. It should not be mounted on unsupported ceiling tiles. To mount the plate to a ceiling or over a standard J-box remove the two screws on the ends of the base plate. Using two mounting screws, (not included) attach the base plate to the ceiling or J-box.

Remove one or both of the caps from the two holes on the suspension plate depending on the number of power cables used. Any power feed cables should be fed through these holes.

Suspension cables should be installed prior to re-attaching the suspension plate to the base plate. There are different methods for installing the suspension (fig. 3). Space the suspension cables evenly around the 12 holes in the plate in accordance with the number of suspensions used.

fig. 3

option1:
 Slide the mounting screw from the suspension cable through the plate and secure with a bolt (not included).

option2:
 Remove the allen screws on the suspension clamp to separate the cable from the clamp. Feed the cable through the top of the plate and re-attach the clamp. Cut off excess cable left off.

